VIBIA

Technical Catalogue June 2025

VIBIA

Recommended sales prices - VAT not included in this price list updates models and finishes in production, which may differ from photographs published in catalogue.





Index

Africa 326
Algorithm Grid 70
Algorithm Free 80
Alpha 498
Array 130
Balance 302
Bamboo 282
Bigger 240
Bind 428
Bind Solo 446
Break 250
Break Plus 252
Brisa 266
Circle 190
Circus 10
Circus Solo 28
Class 184
Cosmos 174
Dama 186
Dots 268
Dots Glass 272
Dots Outdoor 274
Duo 286
Duo Petra 290
Empty 254
Flamingo 96
Flamingo Mini 100
Flat 358
Funnel 142
Ghost 298
Guise 152
Halo 158
Halo Jewel 168
I.Cono 68
Jazz 94
June 280
Knit 488
Kontorno 422
Lily 342
Line 200
Match 500
Mayfair 318
Mayfair Mini 316
Meridiano 278
Musa 486
North 330
Offset 112
Origami 260
Out 256
Palma 232
Palo Alto 264
Pin 104
Plusminus 386
Plusminus Solo 414
Puck 304
Puck Wall Art 308
Rhythm Horizontal 144
Rhythm Vertical 149
Set 496
Skan 40
Slim 84
Spa 370
Sticks 464
Sticks Solo 476
Structural 178
Suite 376
Tempo 346
Top 92
Tube Free 380
Up 258
Warm 294
Wind 246
Wireflow 48
Wireflow Chandelier 64
Wireflow Free 58
Wireflow Lineal 54

Item coding 8
Light source 503
Glossary 504


Lighting control systems 505

Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

Reference


1160 10 / 1A _ 18

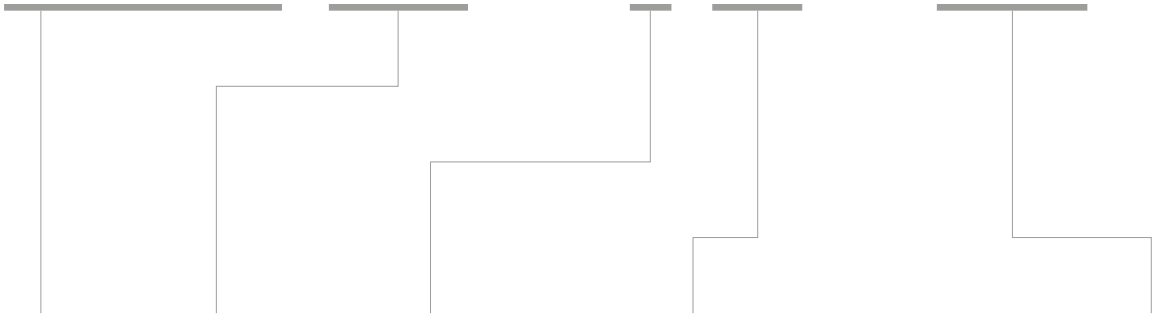

Model	Finish	LED Colour Temperature	Control	Electrical connection	
4 digits	2 digits	1 digit	1 digit	2 digits	
				Type	Model
		0 Without LED **1** 2700 K **2** 3000 K **3** 3500 K **4** 4000 K **7** 2200 K **8** Tunable White **9** Tunable Red **A** Infinite Colour (TW + RGB) **F** Dim-To-Warm	**0** On/ Off **1** DALI-2 **2** 0-10V **3** 1-10V **4** TRIAC **5** Push **6** Sensor **7** Lutron **8** Push 2 **A** Push; 1-10V; DALI-2 **B** Push; 1-10V **C** 1-10V; DALI-2 **D** Push; DALI-2 **E** Casambi PTP; On/ Off **F** Simultaneous line Push 1-10V; DALI-2; Casambi **G** DALI; Casambi; ProtoPixel **M** Without driver **W** Wiz **Y** ProtoPixel **Z** Casambi *	**1** Surface **2** Built-in **3** Remote **4** Bolt-down	**0** Basic **1** Micro **2** XXS **3** XS **4** S **5** M **6** L **8** Free Wire **9** Mud kit

* Casambi refers to wireless dimming solutions. Ask for more information.

Should you need a non-standard product.
Please, request sales conditions.

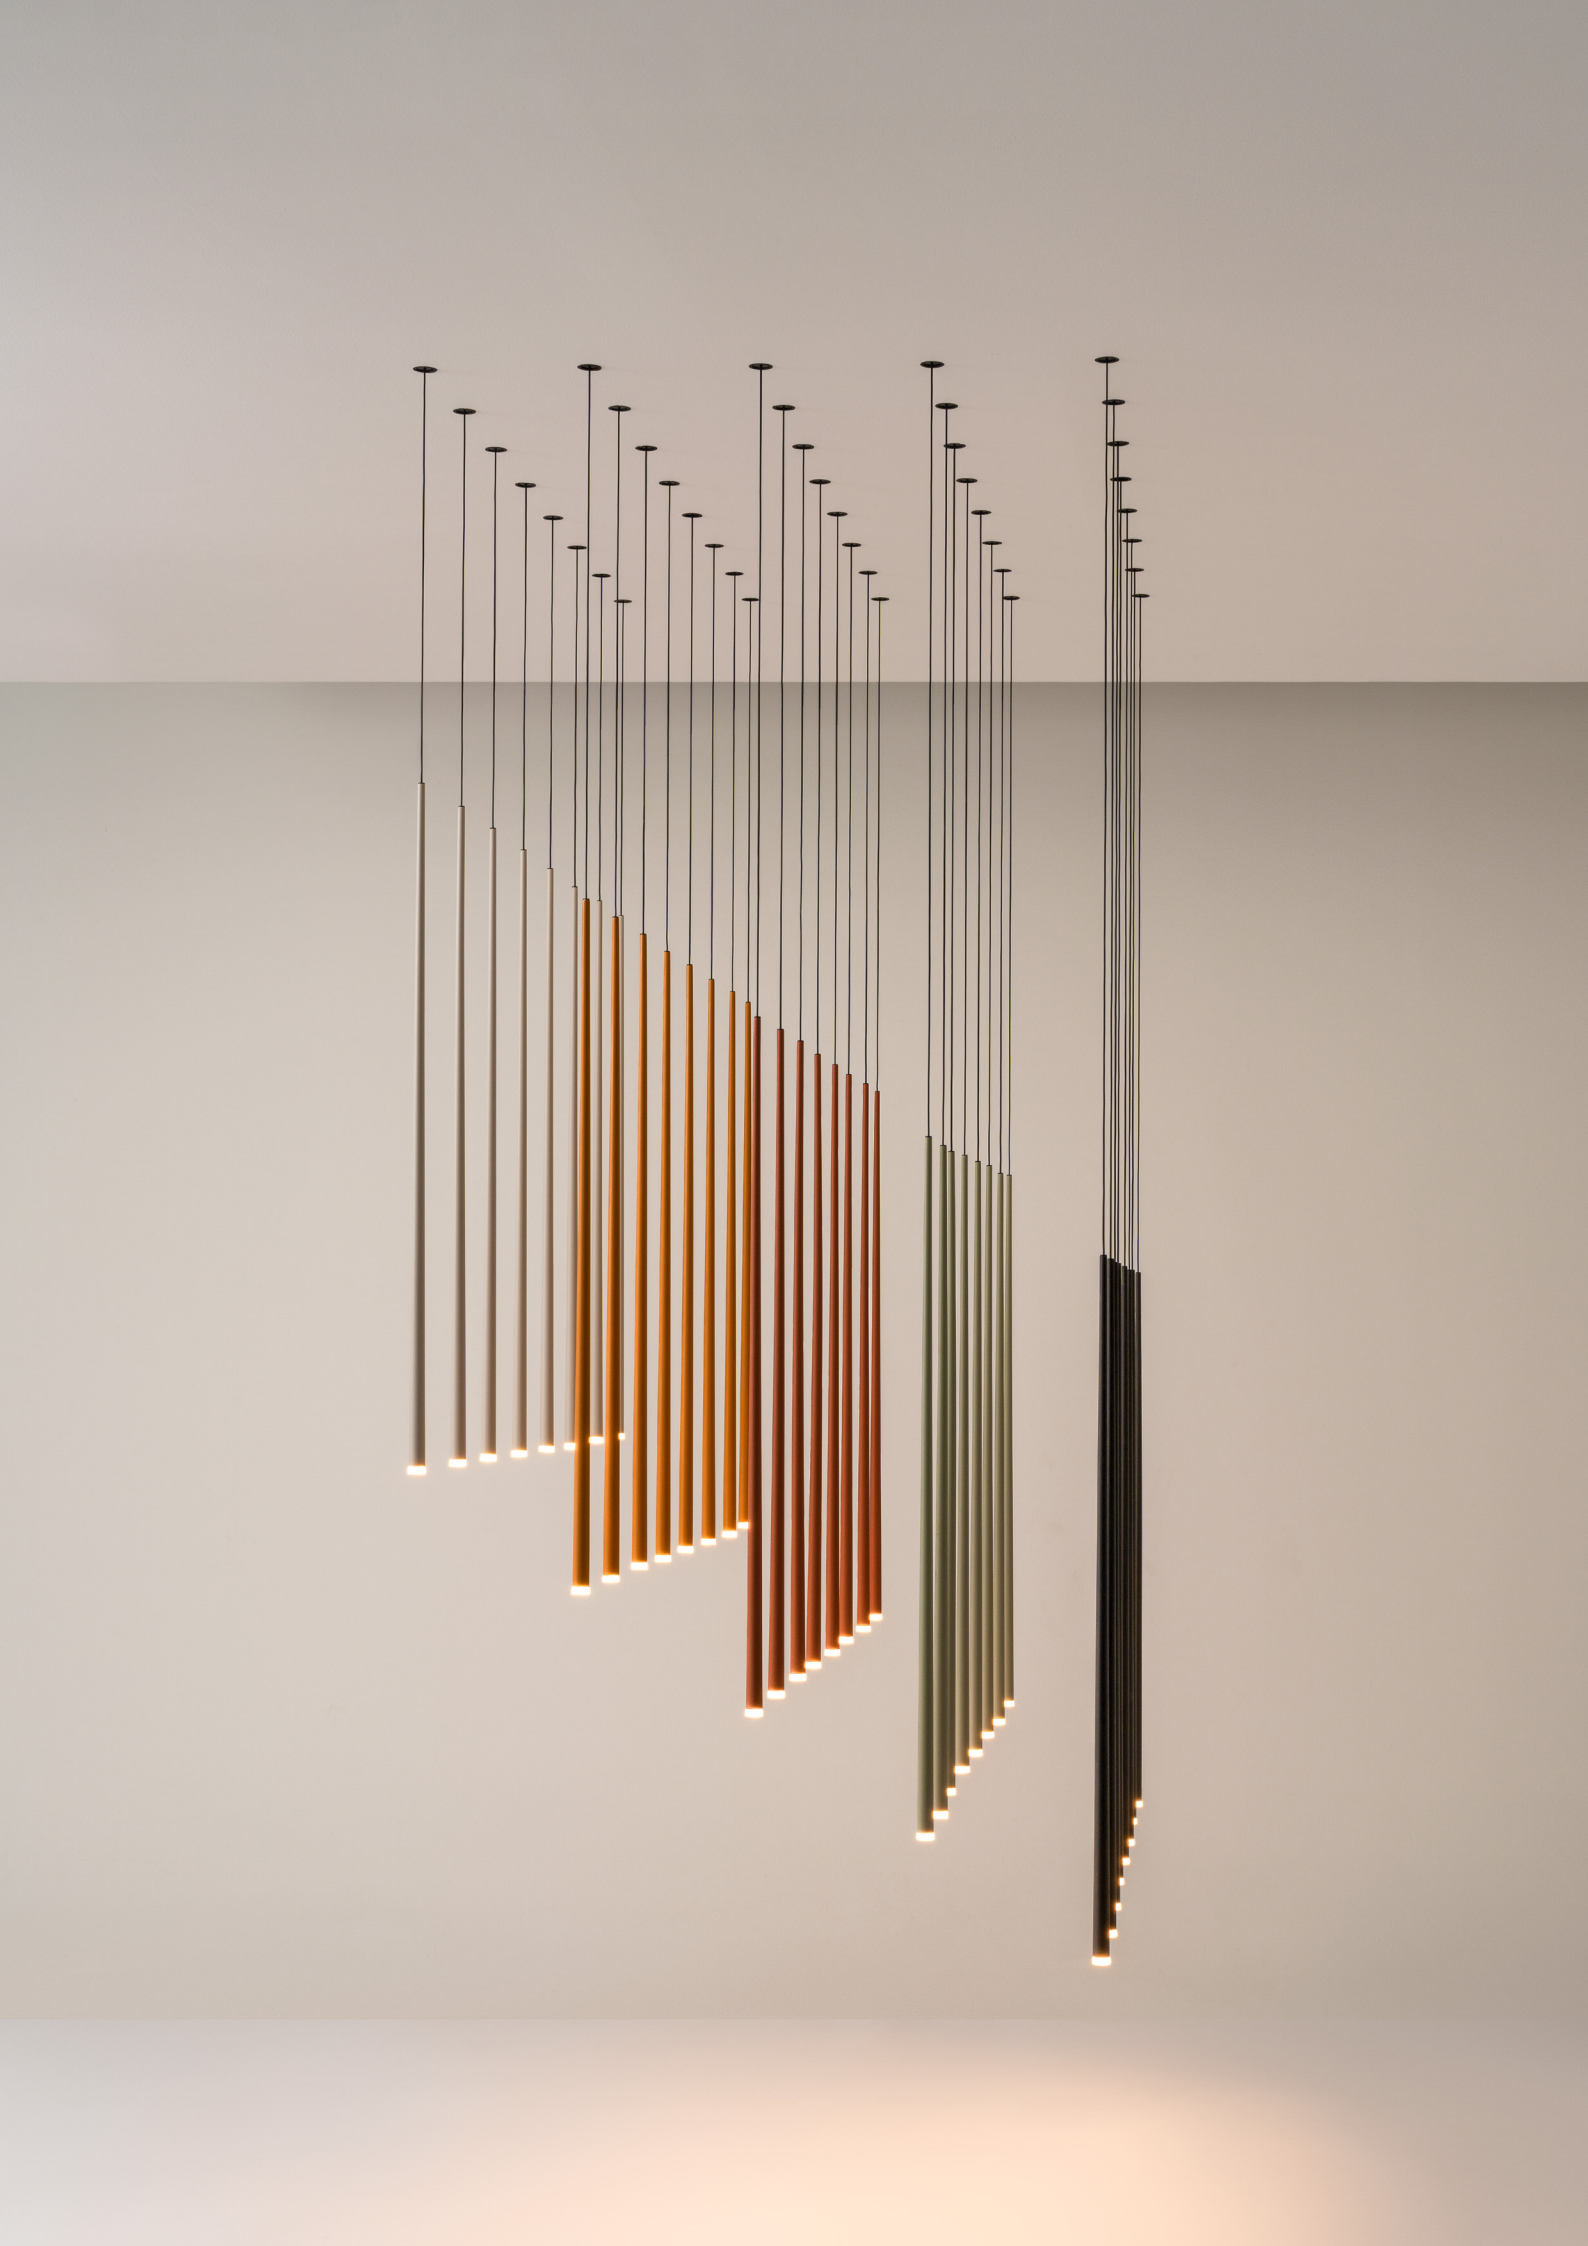

Circus

Design by Antoni Arola


Circus is defined by its minimalist structure and signature conductive bar, delicately balanced by opposing elements to create a festival of light. A creative toolkit full of possibilities to explore and enjoy that offers total freedom of composition, multiple components and a myriad of diffuse and accented lighting effects.

Pendant Ceiling - Volumetric Diffuser

PENDANT


DIRECT TO TRACK

0162

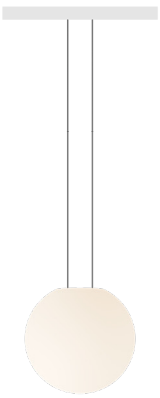

Ø 20 cm

0167

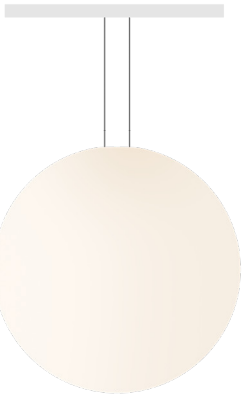


Ø 45 cm

0164

Ø 20 cm

0162



Ø 20 cm

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 759 lm
F
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
E

Tunable White
/8 _ (1800 K - 4000 K)
452 lm - 709 lm

Tunable Red
/9 _ (Red - 2700 K)
172 lm - 468 lm
F

CRI >90

Control

0162 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Y**	Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Y**	Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)
_ _ **/ 9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ **/ 9Z**	Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA
Tunable White:
1 x LED 6,7 W 385 mA
Tunable Red:
1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m^3
Gross weight 1,16 Kg Net weight 0,53 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0164



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 759 lm
F
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
E

Tunable White
/8 _ (1800 K - 4 000 K)
452 lm - 709 lm

Tunable Red
/9 _ (Red - 2700 K)
172 lm - 468 lm
F

CRI >90

Control

0164 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Y**	Static White + ProtoPixel* (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Y**	Tunable White + ProtoPixel* (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene. Top cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA
Tunable White:
1 x LED 6,7 W 385 mA
Tunable Red:
1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,16 Kg Net weight 0,53 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

0167

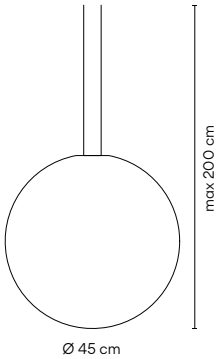

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2588 lm
/2 _ 3000 K - 2706 lm
/3 _ 3500 K - 2804 lm

Tunable White
/8 _ (1800 K - 4000 K)
1403 lm - 2615 lm
E

Tunable Red
/9 _ (Red - 2700 K)
339 lm - 1582 lm
F

CRI >90

Control

0167 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Y**	Static White + ProtoPixel* (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Y**	Tunable White + ProtoPixel* (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Track adapter: PC- Polycarbonate .

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 19,6 W 600 mA
Casambi:
1 x LED 15,7 W 485 mA
Tunable White:
1 x LED 17,7 W 525 mA
Tunable Red:
1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,1966 m³
Gross weight 4,6 Kg Net weight 2,35 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Static White + Casambi; ProtoPixel -18% Flux.


Extra cable length.

LED IP20

Pendant Ceiling - Hidden Diffuser

PENDANT

0155

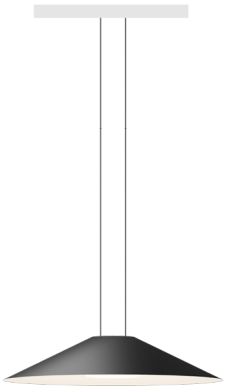

Ø 40 cm


DIRECT TO TRACK

0157



Ø 40 cm

0155

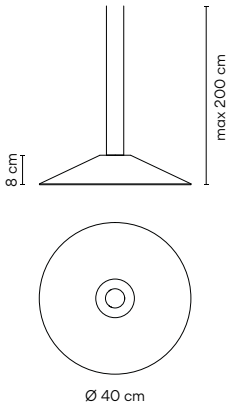

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1763 lm
/2 _ 3000 K - 1843 lm
E
/3 _ 3500 K - 1910 lm
D

Tunable White
/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm
D

Tunable Red
/9 _ (Red - 2700 K)
339,6 lm - 1582 lm
F

CRI >90

Control

0155 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Y**	Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Y**	Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)
_ _ **/ 9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ **/ 9Z**	Tunable Red + Casambi (P2P)

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate.
Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 12,8 W 400 mA
Tunable White:
1 x LED 16,8 W 500 mA
Tunable Red:
1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m^3
Gross weight 2,5 Kg Net weight 0,92 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



0157



Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1763 lm

/2 _ 3000 K - 1843 lm

E

/3 _ 3500 K - 1910 lm

D

Tunable White

/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm

D

Tunable Red

/9 _ (Red - 2700 K)
339,6 lm - 1582 lm

F

CRI >90

Control

0157 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Y**	Static White + ProtoPixel* (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Y**	Tunable White + ProtoPixel* (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Shade: Aluminum. Top cover: PC- Polycarbonate.
Diffuser: PC- Polycarbonate.
Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 12,8 W 400 mA

Tunable White:
1 x LED 16,8 W 500 mA

Tunable Red:
1 x LED 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m^3
Gross weight 2,5 Kg Net weight 0,92 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20

Pendant Ceiling - Accent Spotlight

PENDANT

0140 Narrow
0141 Medium
0142 Wide

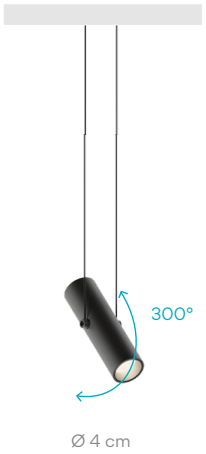


Ø 4 cm

SPOTS

Only in pendant tracks

0130 Narrow
0131 Medium
0132 Wide




Ø 4 cm

SIDE-SPOTS


Only in ceiling tracks

0135 Narrow
0136 Medium
0137 Wide



Ø 4 cm

0140
Narrow
0141
Medium
0142
Wide



0140 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control

0140 _ _ / _ _

_ _ / _ 1 Static White + DALI-2 (P2P)
_ _ / _ Y Static White + ProtoPixel* (P2P)
_ _ / _ Z Static White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0141 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

Tunable Red
/F _ (Red - 2700 K)
147 lm - 535 lm

G

CRI >90

Control

0141 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Y**	Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Y**	Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)
_ _ **/ 9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ **/ 9Z**	Tunable Red + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7 W 460 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Extra cable length.

LED IP20

0142 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0142 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Y**	Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Y**	Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA


Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Extra cable length.

LED IP20

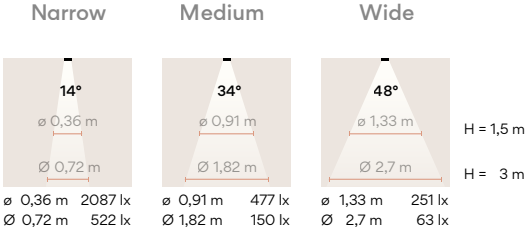

0130
Narrow
0131
Medium
0132
Wide

0130 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)


LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control
0130 _ _ **/** _ _

- _ _ **/** _ **1** Static White + DALI-2 (P2P)
- _ _ **/** _ **Y** Static White + ProtoPixel* (P2P)
- _ _ **/** _ **Z** Static White + Casambi (P2P)



Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics
1 x LED 7,2 W 400 mA

Packaging
1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20



0131 Medium

Finishes

11/ _ _ Black (NCS S 8500-N)
24/ _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G

CRI >90

Control

0131 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2 (P2P)
_ _ **/** _ **Y** Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z** Static White + Casambi (P2P)

_ _ **/ 8Y** Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z** Tunable White + Casambi (P2P)

_ _ **/ 9Y** Tunable Red + ProtoPixel* (P2P)
_ _ **/ 9Z** Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

0132 Wide

Finishes

11/ _ _ Black (NCS S 8500-N)
24/ _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

CRI >90

Control

0132 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2 (P2P)
_ _ **/** _ **Y** Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z** Static White + Casambi (P2P)

_ _ **/ 8Y** Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging


1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20

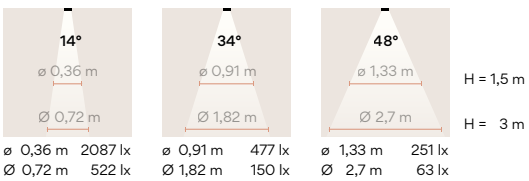

Narrow		Medium		Wide	
ø 0,36 m	2087 lx	ø 0,91 m	477 lx	ø 1,33 m	251 lx
Ø 0,72 m	522 lx	Ø 1,82 m	150 lx	Ø 2,7 m	63 lx

0135
Narrow
0136
Medium
0137
Wide



0135 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control
0135 _ _ **/** _ _

- _ _ **/** _ **1** Static White + DALI-2 (P2P)
- _ _ **/** _ **Y** Static White + ProtoPixel* (P2P)
- _ _ **/** _ **Z** Static White + Casambi (P2P)

Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics
1 x LED 7,2 W 400 mA

Packaging
1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes
*Available from January 2025.

LED IP20

0136 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm

G

CRI >90

Control
0136 _ _ **/** _ _

- _ _ **/** _ **1** Static White + DALI-2 (P2P)
- _ _ **/** _ **Y** Static White + ProtoPixel* (P2P)
- _ _ **/** _ **Z** Static White + Casambi (P2P)
- _ _ **/ 8Y** Tunable White + ProtoPixel* (P2P)
- _ _ **/ 8Z** Tunable White + Casambi (P2P)
- _ _ **/ 9Y** Tunable Red + ProtoPixel* (P2P)
- _ _ **/ 9Z** Tunable Red + Casambi (P2P)

Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED 7 W 460mA

Packaging
1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0137 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0137 _ _ / _ _

_ _ / _ 1	Static White + DALI-2 (P2P)
_ _ / _ Y	Static White + ProtoPixel* (P2P)
_ _ / _ Z	Static White + Casambi (P2P)
_ _ / 8Y	Tunable White + ProtoPixel* (P2P)
_ _ / 8Z	Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA

Tunable White:
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m^3
Gross weight 0,44 Kg Net weight 0,14 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

Narrow	Medium	Wide	
14°	34°	48°	
ø 0,36 m	ø 0,91 m	ø 1,33 m	H = 1,5 m
Ø 0,72 m	Ø 1,82 m	Ø 2,7 m	H = 3 m
ø 0,36 m 2087 lx	ø 0,91 m 477 lx	ø 1,33 m 251 lx	
Ø 0,72 m 522 lx	Ø 1,82 m 150 lx	Ø 2,7 m 63 lx	

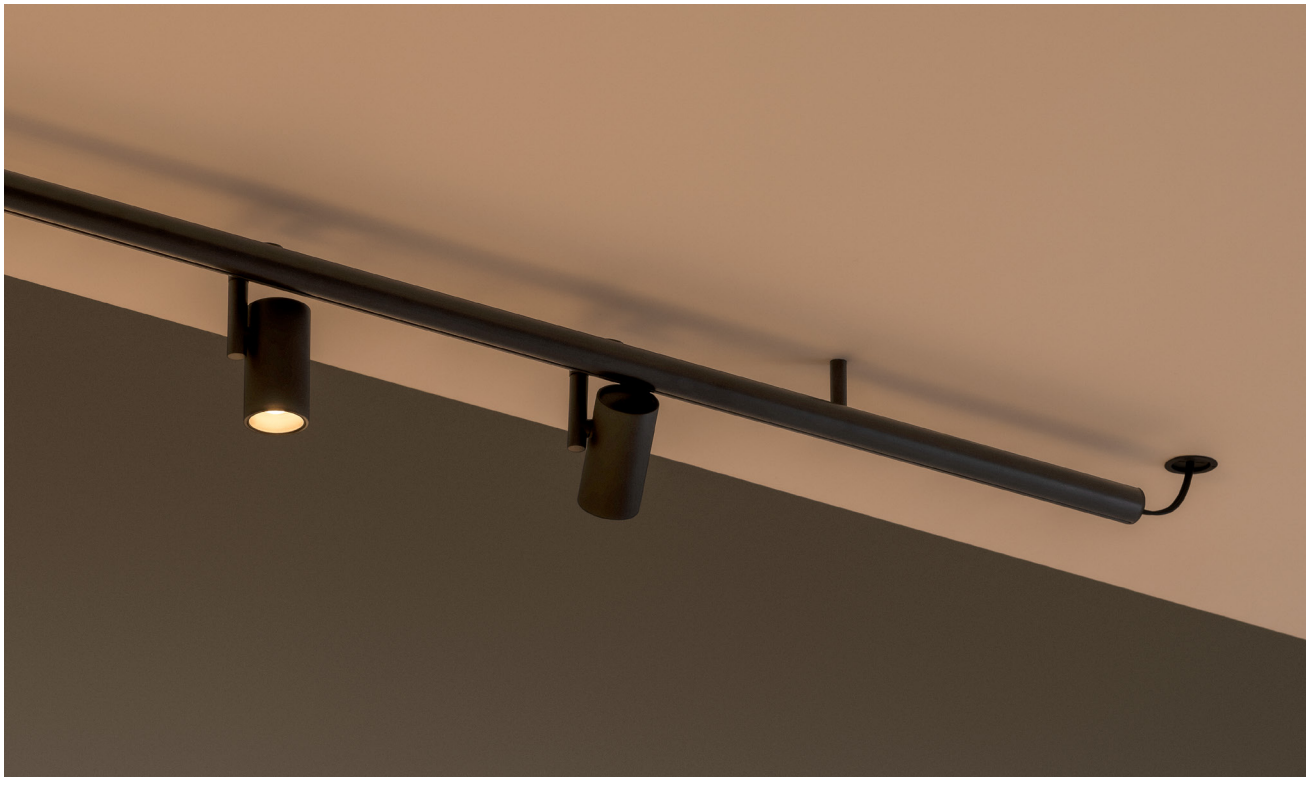


Pendant Ceiling - Accent Downlight

0151 Narrow
0152 Medium
0153 Wide



Ø 4 cm

0151
Narrow
0152
Medium
0153
Wide



0151 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control

0151 _ _ / _ _

_ _ / _ **1** Static White + DALI-2 (P2P)
_ _ / _ **Y** Static White + ProtoPixel* (P2P)
_ _ / _ **Z** Static White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m^3
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0152 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G

CRI >90

Control

0152 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Y**	Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Y**	Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)
_ _ **/ 9Y**	Tunable Red + ProtoPixel* (P2P)
_ _ **/ 9Z**	Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7 W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20 CE UK CA EAC

0153 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

CRI >90

Control

0153 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Y**	Static White + ProtoPixel* (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Y**	Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging


1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20 CE UK CA EAC

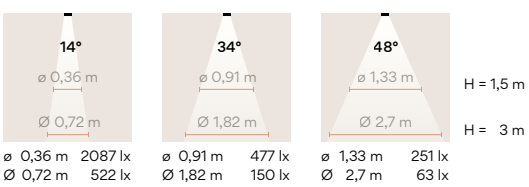


Narrow		Medium		Wide	
ø 0,36 m	2087 lx	ø 0,91 m	477 lx	ø 1,33 m	251 lx
Ø 0,72 m	522 lx	Ø 1,82 m	150 lx	Ø 2,7 m	63 lx

Pendant Ceiling - Light Reflector

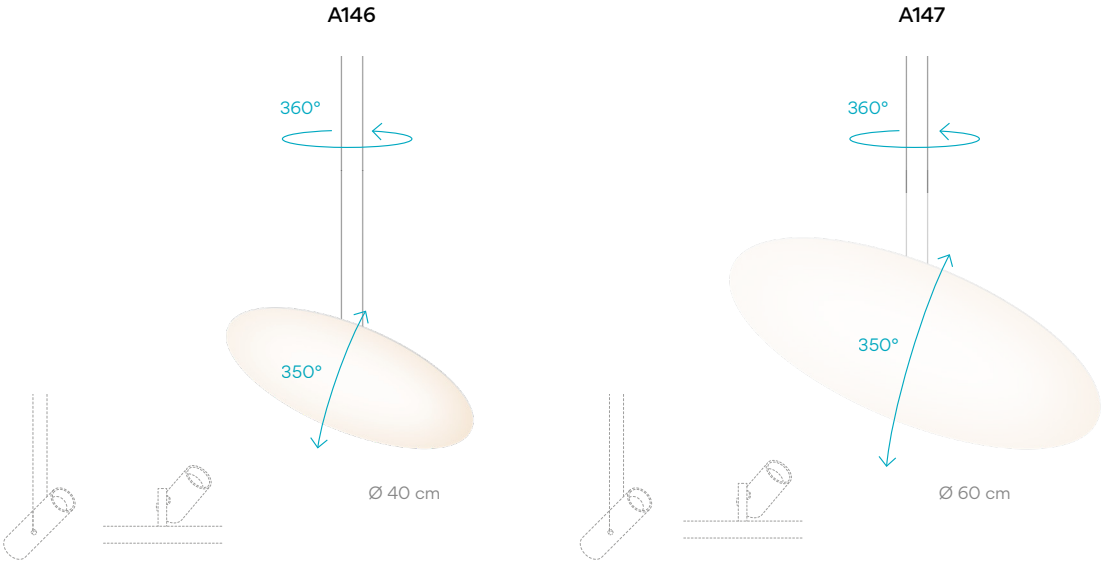

A146



Finishes

● **11/ _ _** Black
(NCS S 8500-N)

Materials

Body: Aluminum.


Control

A146 11 / 0M

Packaging

1 Box 0,48 x 0,48 x 0,12 m
Vol 0,00276 m³
Gross weight 1,5 Kg
Net weight 0,74 Kg

A147



Finishes

● **11/ _ _** Black
(NCS S 8500-N)

Materials

Body: Aluminum.

Control


A147 11 / 0M

Packaging

1 Box 0,68 x 0,68 x 0,12 m
Vol 0,00555 m³
Gross weight 2,5 Kg
Net weight 1,56 Kg

Product specifications subject to change without notice. Please check vibia.com for updated information.

Select your model at **vibia.com** and adjust

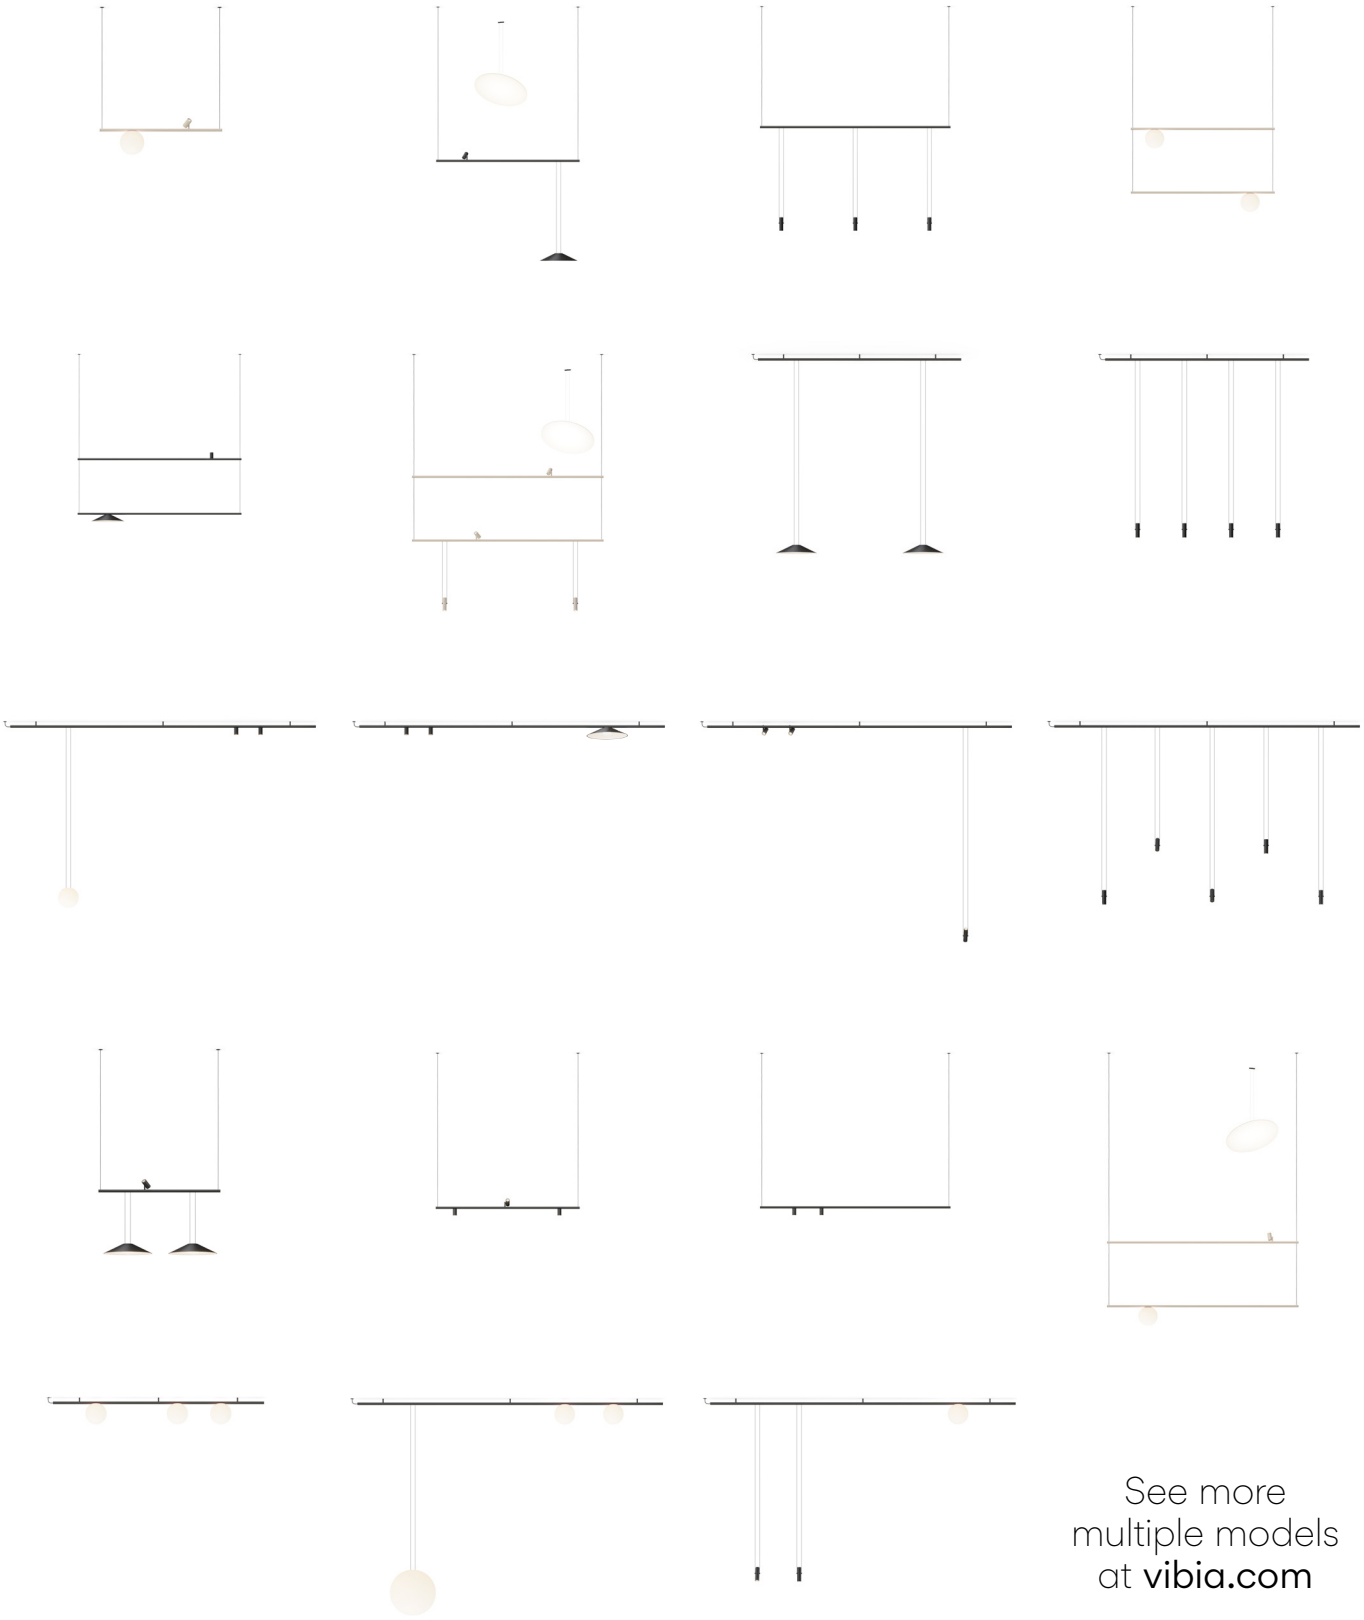

See more
multiple models
at **vibia.com**

Tracks

Ceiling Tracks

A352 210 cm



A355 300 cm



Ceiling Tracks 210 cm

A352 _ _ / 0M _ _ _

- _ _ / 0M _ 10
- _ _ / 0M _ 23
- _ _ / 0M _ 31

Ceiling Tracks 300 cm

A355 _ _ / 0M _ _ _

- _ _ / 0M _ 10
- _ _ / 0M _ 23
- _ _ / 0M _ 31

Finishes

11/ 0M Black (NCS S 8500-N)

24/ 0M Beige M1 (NCS S 2005-Y50R)

Surface Materials

Track: Aluminum. Top cover: PVC.

IP20

Packaging A352

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m^3
Gross weight 3,87 Kg
Net weight 1,62 Kg

Packaging A355

1 Box
0,125 x 0,125 x 3,25 m
Vol 0,0508 m^3
Gross weight 5,42 Kg
Net weight 2,17 Kg

Accessories included with the Ceiling tracks



Built-in




Remote

Select Eletrical connection



Surface
Ø 6,5 cm
33 x 6 cm



Built-in XS
25 x 3 x 2 cm



Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Product specifications subject to change without notice. Please check vibia.com for updated information.

Pendant Single Tracks

A358 (H 3m)
A359 (H 9m)

110 cm



A364 (H 3m)
A365 (H 9m)

150 cm



A370 (H 3m)
A371 (H 9m)

200 cm



Height 3 m 110 cm

A358 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 3 m 150 cm

A364 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 3 m 200 cm

A370 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 9 m 110 cm

A359 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 9 m 150 cm

A365 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 9 m 200 cm

A371 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.

IP20 CE UK CA EAC

Packaging A358 - A359

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m3
Gross weigth 2,34 kg
Net weight 1,09 kg

Packaging A364 - A365

1 Box
0,125 x 0,125x 1,6 m
Vol 0,025 m^3
Gross weight 2,94 Kg
Net weight 1,34 Kg

Packaging A370 - A371

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m^3
Gross weight 3,89 Kg
Net weight 1,64 Kg

Accessories included with the Ceiling tracks



Surface


Built-in


Remote

Select Eletrical connection


Surface
Ø 6,5 cm
33 x 6 cm


Built-in XS
25 x 3 x 2 cm


Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots and 2 counterweights required for 5 spots.

A160 _ _ / 0M


Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Pendant Double Tracks

A376 (H 3m)
A377 (H 9m)

110 cm

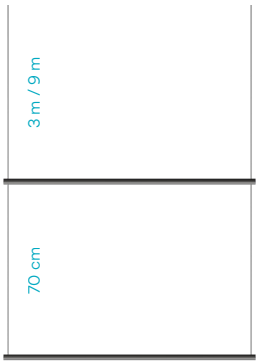

A382 (H 3m)
A383 (H 9m)

150 cm



A388 (H 3m)
A389 (H 9m)

200 cm



Height 3 m 110 cm

A376 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 3 m 150 cm

A382 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 3 m 200 cm

A388 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 9 m 110 cm

A377 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 9 m 150 cm

A383 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 9 m 200 cm

A389 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.

IP20

Packaging A376 - A377

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m³
Gross weight 3,34 Kg
Net weight 1,99 Kg

Packaging A382 - A383

1 Box
0,125 x 0,125 x 1,6 m
Vol 0,025 m³
Gross weight 4,09 Kg
Net weight 2,49 Kg

Packaging A388 - A389

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m³
Gross weight 5,49 Kg
Net weight 3,09 Kg

Accessories included with the Ceiling tracks



Surface



Built-in


Remote

Select Eletrical connection


Surface
Ø 6,5 cm
33 x 6 cm


Built-in XS
25 x 3 x 2 cm


Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots
and 2 counterweights required for 5 spots.

A160 _ _ / 0M

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Product specifications subject to change without notice. Please check vibia.com for updated information.

Electrical connection options

Driver for pendant

Control

A394 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface
80 / 0G _ 23	30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS
80 / 0G _ 31	30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro
_ _ / 0Z _ **10**	30W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	30W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	30W + Casambi Simultaneous line + Remote Micro

A395 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface
80 / 0G _ 23	48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS
80 / 0G _ 31	48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro
_ _ / 0Z _ **10**	48W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	48W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	48W + Casambi Simultaneous line + Remote Micro

A396 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface
80 / 0G _ 23	84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS
80 / 0G _ 31	84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro
_ _ / 0Z _ **10**	84W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	84W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	84W + Casambi Simultaneous line + Remote Micro

Driver for ceiling

Control

A397 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface
80 / 0G _ 23	30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS
80 / 0G _ 31	30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro
_ _ / 0Z _ **10**	30W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	30W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	30W + Casambi Simultaneous line + Remote Micro

A398 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface
80 / 0G _ 23	48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS
80 / 0G _ 31	48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro
_ _ / 0Z _ **10**	48W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	48W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	48W + Casambi Simultaneous line + Remote Micro

A399 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface
80 / 0G _ 23	84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS
80 / 0G _ 31	84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro
_ _ / 0Z _ **10**	84W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	84W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	84W + Casambi Simultaneous line + Remote Micro

Finishes

11/ 0 _ Black (NCS S 8500-N)

24/ 0 _ Beige M1 (NCS S 2005-Y50R)

80/ 0 _ Without finish for Built-in and Remote.

Materiales

Aluminum + PC-Polycarbonate.
(Surface version only)

IP20

Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz

Notes

*Available from January 2025.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0044 m³
Gross weight 0,95 Kg Net weight 0,53 Kg

Included tracks electrical connections



Pendant
Built-in



Ceiling Pendant
Remote
9 m electrical cable included


Select Eletrical connection




Ceiling
Surface
Ø 6,5 cm
33 x 6 cm



Pendant
Surface
Ø 6,5 cm
33 x 6 cm



Ceiling Pendant
Built-in XS
25 x 3 x 2 cm



Ceiling Pendant
Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Circus Solo


Design by Antoni Arola

The Circus system incorporates a range of independent elements that can be surface mounted to the ceiling, including spots, downlights and general lighting fixtures. This line allows professionals to create harmonic compositions and subtle atmospheres that break with the standards.

Pendant - Volumetric Diffuser


SURFACE BUILT-IN

0185



Ø 20 cm

0187

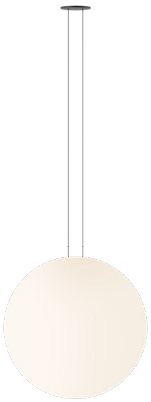

Ø 45 cm

SURFACE BUILT-IN REMOTE


0193



Ø 20 cm

150 cm

0185



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 759 lm
F
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
E

Tunable White
/8 _ (1800 K - 4000 K)
452 lm - 709 lm

Tunable Red
/9 _ (Red - 2700 K)
172 lm - 468 lm
F

CRI >90

Control

0185 _ _ **/** _ _

_ _ **/ _ D**	Static White + Push, DALI-2
_ _ **/ _ Z**	Static White + Casambi
_ _ **/ 8Z**	Tunable White + Casambi
_ _ **/ 9Z**	Tunable Red + Casambi

Select Eletrical connection



Surface



Built-in XS

_10 Surface
_23 Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 6,7 W 385 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7,7 W 400 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,32 x 0,32 x 0,5 m
Vol 0,0512 m^3
Gross weight 1,96 Kg Net weight 1,03 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

Surface

LED IP20

Built-in

LED IP20


Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant



0187

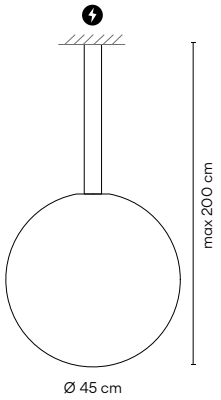

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2588 lm
/2 _ 3000 K - 2706 lm
/3 _ 3500 K - 2804 lm

Tunable White
/8 _ (1800 K - 4000 K)
1403 lm - 2615 lm
E

Tunable Red
/9 _ (Red - 2700 K)
339 lm - 1582 lm
F

CRI >90

Control

0187 _ _ / _ _

- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / **8Z** Tunable White + Casambi
- _ _ / **9Z** Tunable Red + Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K- 3500K:
1 x LED 19,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Tunable White:
1 x LED 17,7 W 525 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 15,7 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,1966 m^3
Gross weight 5,1 Kg Net weight 2,85 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.


Surface

LED IP20 CE UK CA EAC

Built-in

LED IP20 CE UK CA EAC

0193



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1518 lm
F

/2 _ 3000 K - 1588 lm
/3 _ 3500 K - 1644 lm
E

CRI >90

Control

0193 _ _ / _ _

- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **Z** Static White + Casambi

Select Eletrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Structure: Aluminum.
Canopy (Surface): Aluminum + Polycarbonate.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2 x LED 6,7 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 1,82 x 0,30 x 0,30 m
Vol 0,164 m^3
Gross weight 3,5 Kg Net weight 2,22 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.


Extra cable length.

LED IP20 CE UK CA EAC

Pendant - Hidden Diffuser (Screened)

SURFACE BUILT-IN

0182



Ø 40 cm

SURFACE BUILT-IN REMOTE


0196



Ø 40 cm

150 cm

0182

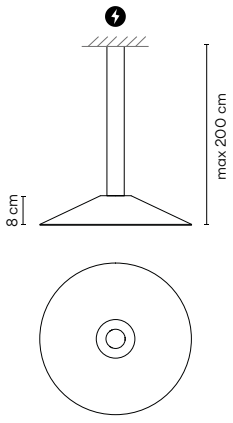

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1763 lm
/2 _ 3000 K - 1843 lm
E
/3 _ 3500 K - 1910 lm
D

Tunable White
/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm
D

Tunable Red
/9 _ (Red - 2700 K)
339,6 lm - 1582 lm
F

CRI >90

Control

0182 _ _ / _ _

_ _ / _ **D**	Static White + Push, DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **8Z**	Tunable White + Casambi
_ _ / **9Z**	Tunable Red + Casambi

Select Eletrical connection



Surface



Built-in XS

_10 Surface
_23 Built-in XS

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate. Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate .

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,8 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 16,8 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 15,7 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m³
Gross weight 3 Kg Net weight 1,42 Kg

Notes

DALI-2 products are compatible
(via a designated gateway) with all
ProtoPixel dynamic-light solution products.

Extra cable length.


Surface

LED IP20

Built-in XS

LED IP20

0196



Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3104 lm
/2 _ 3000 K - 3244 lm
E

/3 _ 3500 K - 3362 lm
D

CRI >90

Control

0196 _ _ / _ _

_ _ / _ **D** Static White + Push, DALI-2

_ _ / _ **Z** Static White + Casambi

Select Eletrical connection


Surface


Built-in XS


Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate. Structure: Aluminum.
Canopy (Surface): Aluminum + Polycarbonate.
Canopy (Built-in): ABS + PC- Polycarbonate

Light Source and electronics

2 x LED 11,1 W 350 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 1,60 x 0,48 x 0,13 m
Vol 0,100 m^3
Gross weight 5,60 Kg Net weight 3,10 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

LED IP20




Product specifications subject to change without notice. Please check vibia.com for updated information.


Pendant - Accent Spotlight

SURFACE BUILT-IN

0176 Narrow
0177 Medium
0178 Wide

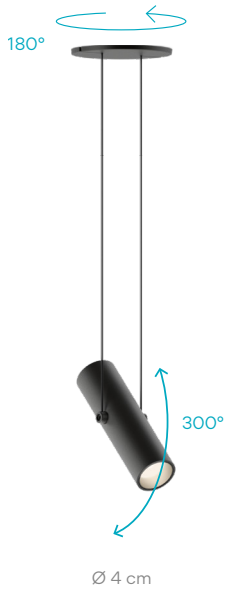

0176
Narrow
0177
Medium
0178
Wide



0176 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
F
CRI >90

Control
0176 _ _ / _ _
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **Z** Static White + Casambi

Select Eletrical connection


Surface


Built-in XS

_10 Surface
_23 Built-in XS

Materials
Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging
1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m^3
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Extra cable length.

Surface
LED IP20 CE UK CA EAC

Built-in XS
LED IP20 CE UK CA EAC

0177 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm

F

CRI >90

Control

0177 _ _ **/** _ _

_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 8Z** Tunable White + Casambi
_ _ **/ 9Z** Tunable Red + Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m^3
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

Surface

LED IP20

Built-in XS

LED IP20

0178 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0178 _ _ **/** _ _

_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 8Z** Tunable White + Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m^3
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

DALI-2 products are compatible
(via a designated gateway) with all
ProtoPixel dynamic-light solution products.




Extra cable length.

Surface

LED IP20

Built-in XS

LED IP20

Narrow	Medium	Wide	
			H = 1,5 m H = 3 m
ø 0,36 m 2087 lx Ø 0,72 m 522 lx	ø 0,91 m 477 lx Ø 1,82 m 150 lx	ø 1,33 m 251 lx Ø 2,7 m 63 lx	





Ceiling - Accent Spotlight


SPOTS (REMOTE / BUILT-IN)

0171 Narrow
0172 Medium
0173 Wide




0171
Narrow
0172
Medium
0173
Wide

BUILT-IN



REMOTE



0171 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control

0171 _ _ **/** _ _

- _ _ / _ **0** On/Off
- _ _ / _ **D** Push, DALI-2
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi

Select Eletrical connection



Built-in XS



Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics

1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m^3
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0172 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G

CRI >90

Control

0172 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/Off
_ _ **/** _ **D**	Static White + Push, DALI-2
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 8Z**	Tunable White + Casambi
_ _ **/ 9Z**	Tunable Red + Casambi

Select Eletrical connection



Built-in XS



Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Ceiling Base: Aluminum. Installation frame (Built-in): POM. Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m^3
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant

0173 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

F

CRI >90

Control

0173 _ _ / _ _

_ _ / _ **0** Static White + + On/Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi
_ _ / **8Z** Tunable White + Casambi

Select Eletrical connection



Built-in XS



Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Ceiling Base: Aluminum. Installation frame (Built-in): POM. Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging


1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.


Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

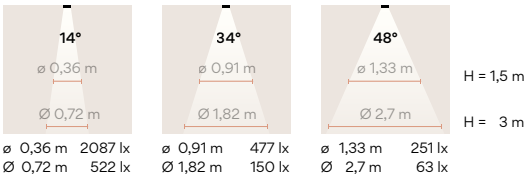

ø 0,36 m 2087 lx
Ø 0,72 m 522 lx
ø 0,91 m 477 lx
Ø 1,82 m 150 lx
ø 1,33 m 251 lx
Ø 2,7 m 63 lx

Light reflector- go to **page 22**

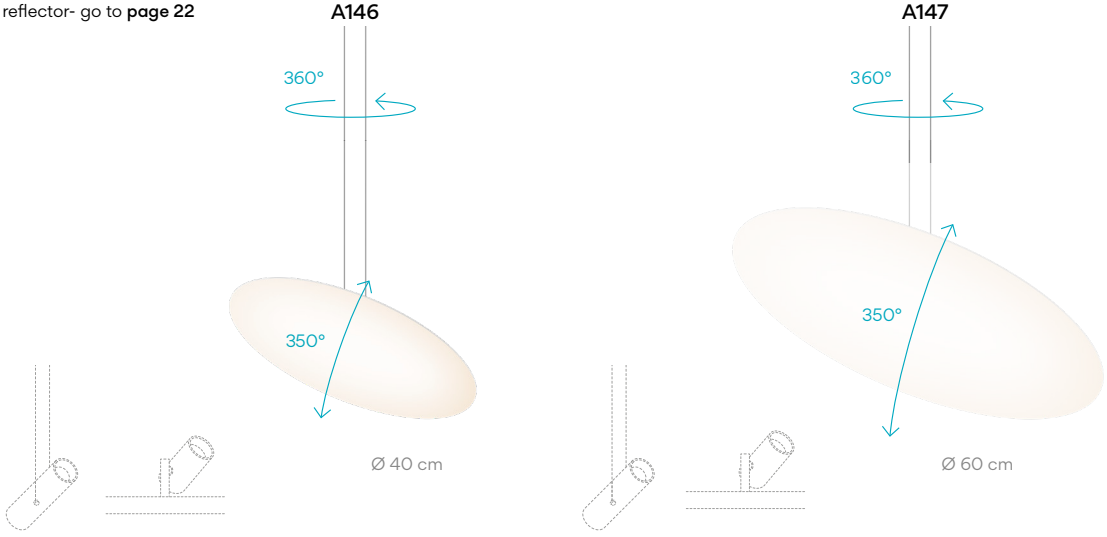

Product specifications subject to change without notice. Please check vibia.com for updated information.

Select Eletrical connection

For Ref. 0176, 0177, 0178, 0182, 0185, 0187

Drop ceiling

_23
Built-in XS



Ø 8 cm
height 8,5 cm

match with
fixture finish.

Regular ceiling

_10
Surface



Ø 6,5 cm
height 17 cm

match with
fixture finish.

For Ref. 0193, 0196

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 8,5 cm

match with
fixture finish.

Regular ceiling

_10
Surface



Ø 6,5 cm
Length 33 cm

match with
fixture finish.

For Ref. 0171, 0172, 0173

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.


_23
Built-in XS




Ø 8,3 cm
height 8,5 cm

match with
fixture finish.

Remote



Built-in




Skan

Design by Lievore, Altherr, Molina

Skan is a sleek and unadorned fixture. It combines lean lines with soothing purity of form, adding a minimalist sensibility to any space.

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control


Floor

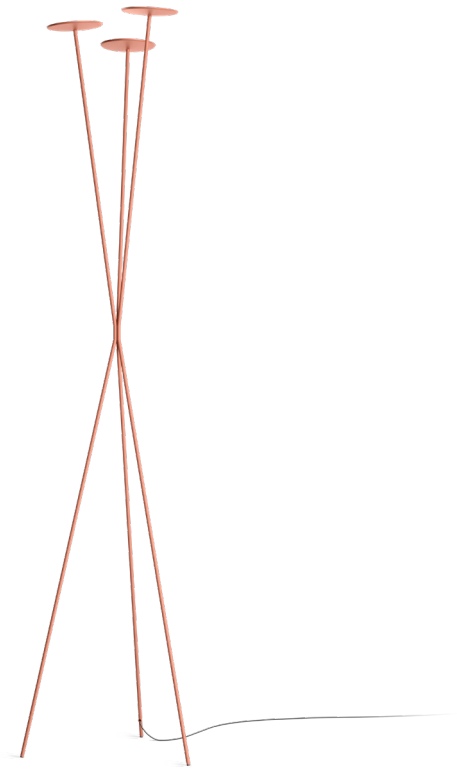

0260

43 x 37,5 x 198 cm

0260



Finishes

10/ _ _ White
(NCS S 0300-N)

11/ _ _ Black
(NCS S 8500-N)

37/ _ _ Terra Red
(NCS S4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 4430,16 lm
C

/2 _ 3000 K - 3792,73 lm
E

/3 _ 3500 K - 4799,9 lm
D

CRI >90

Control

0260 _ _ **/** _ **5** Push

Materials

Head: Aluminum. Diffuser: PMMA.
Vertical tube: Steel.

Light Source and electronics

3 x LED 9,2 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz


Packaging

1 Box 2,11 x 0,60 x 0,60 m
Vol 0,7596 m^3
Gross weight 5,4 Kg Net weight 2,5 Kg

LED IP20 CE UKCA EAC

Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

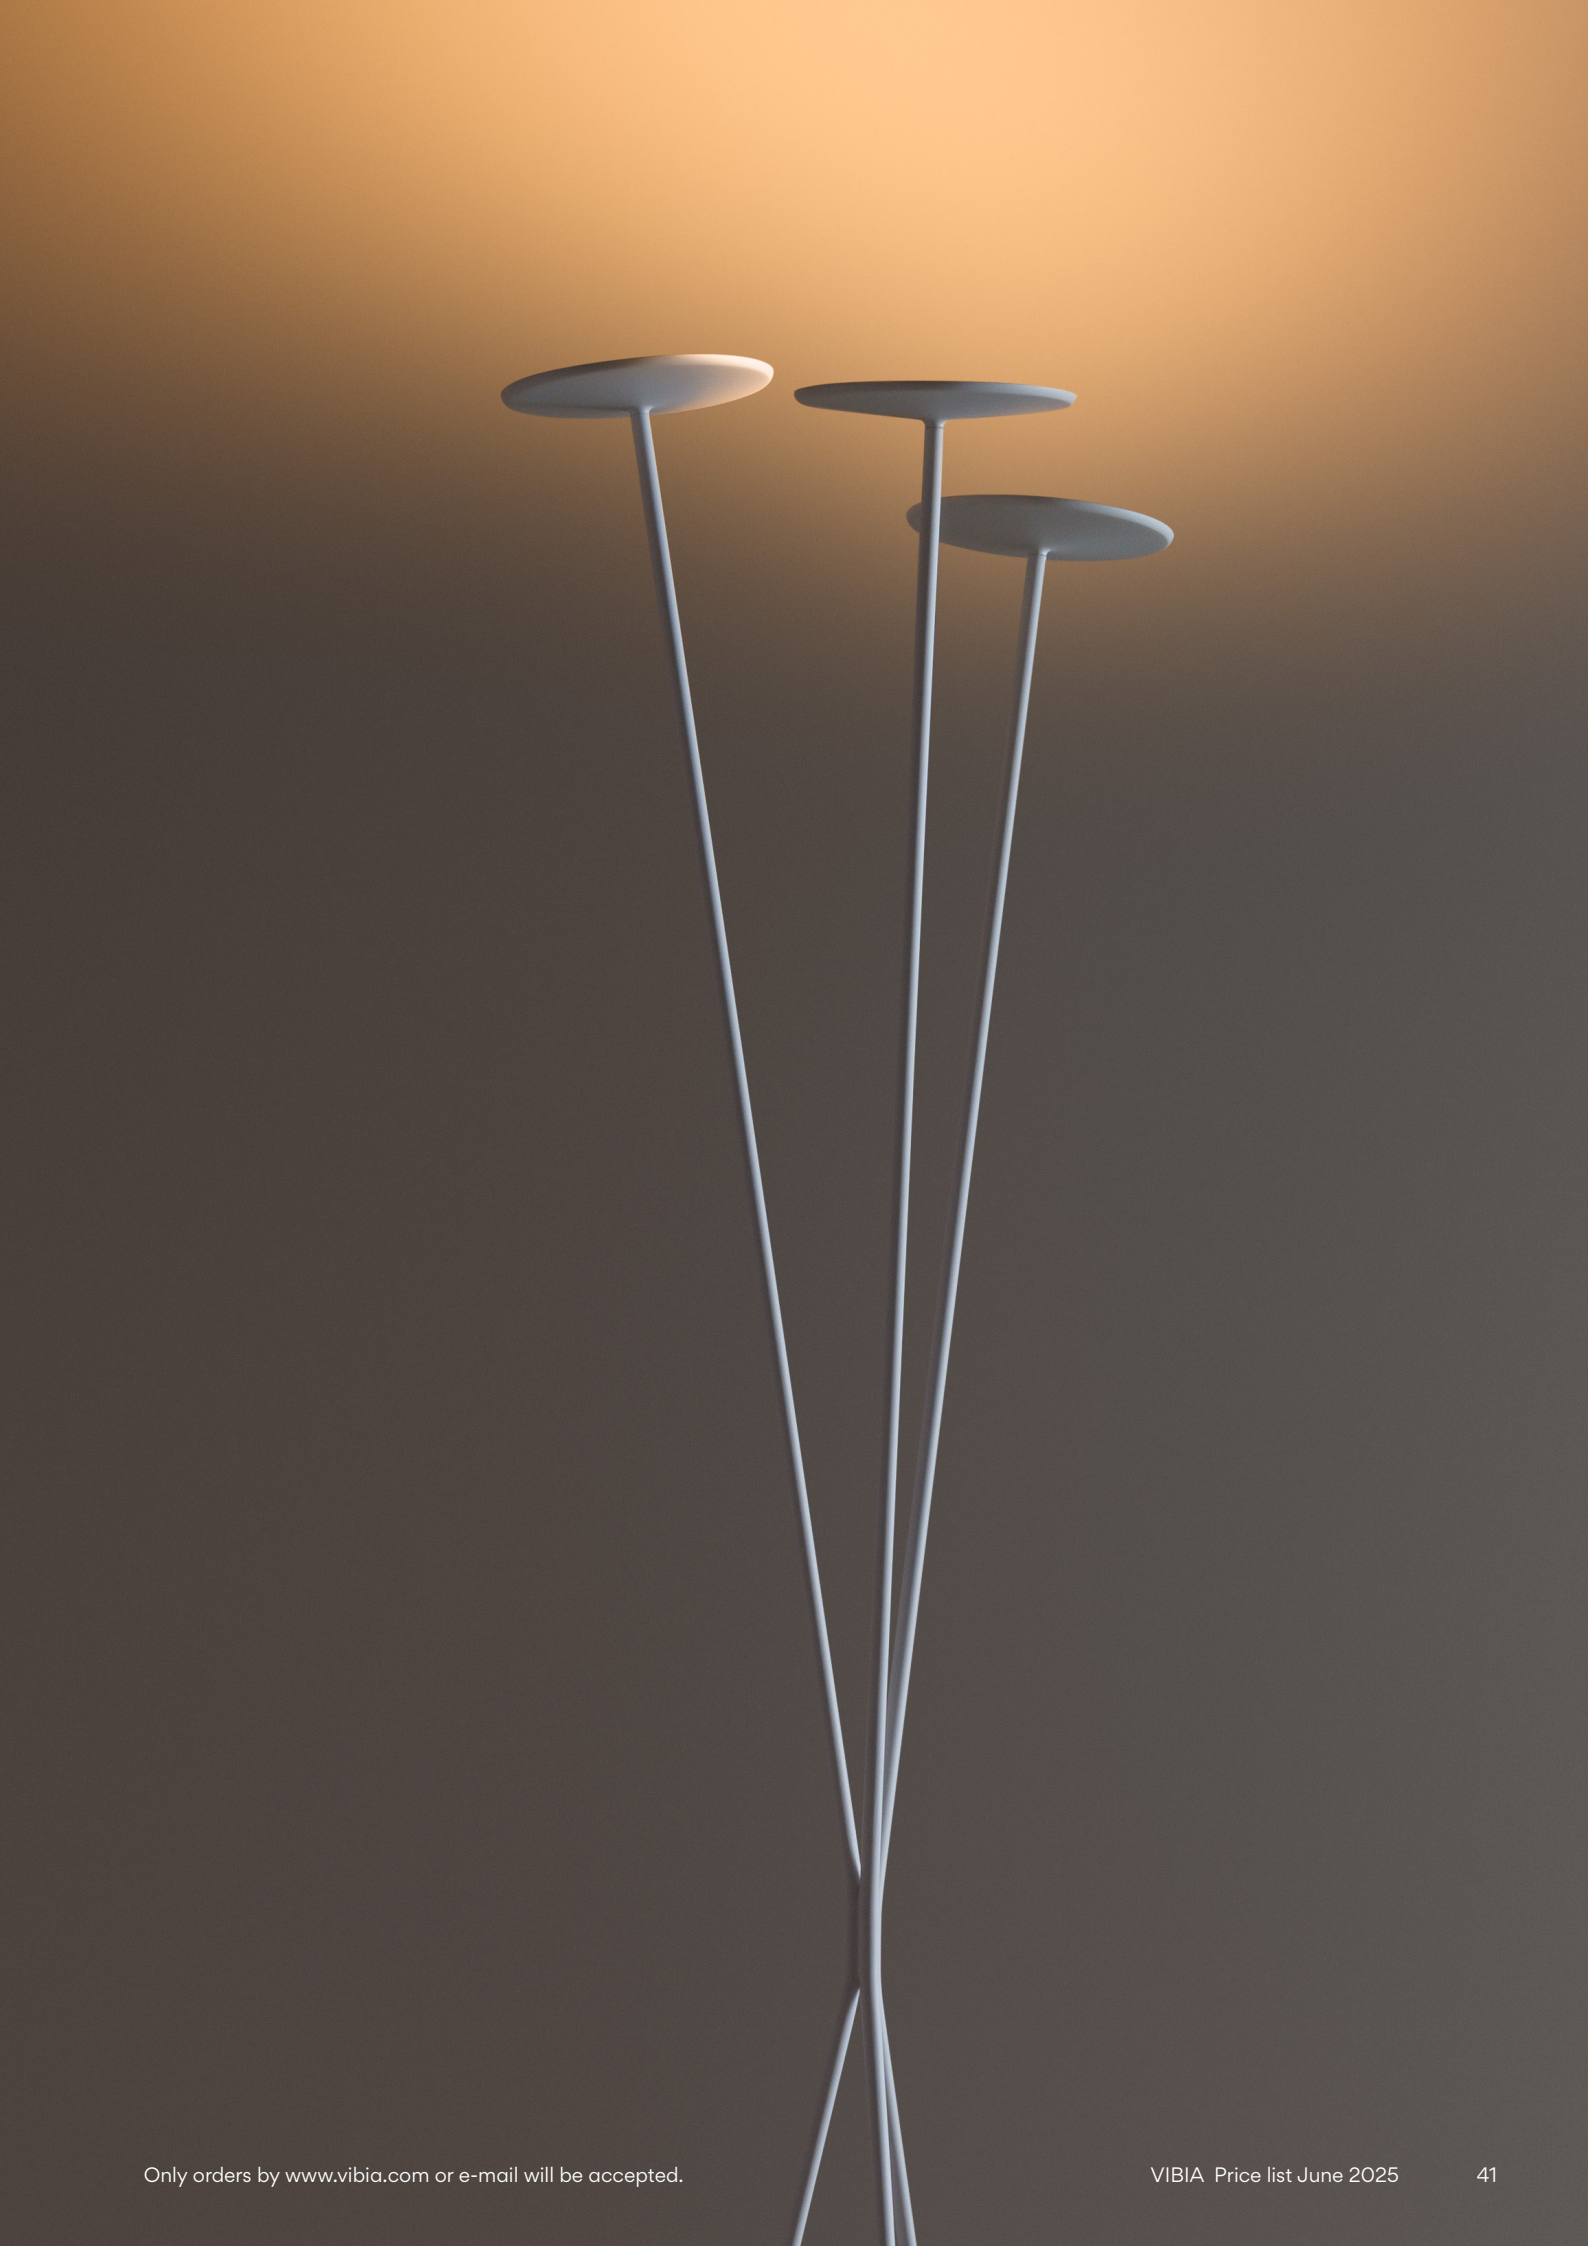

Pendant

INDIVIDUAL MODEL

0270




Ø 30 cm

0275




Ø 60 cm

MULTIPLE MODELS

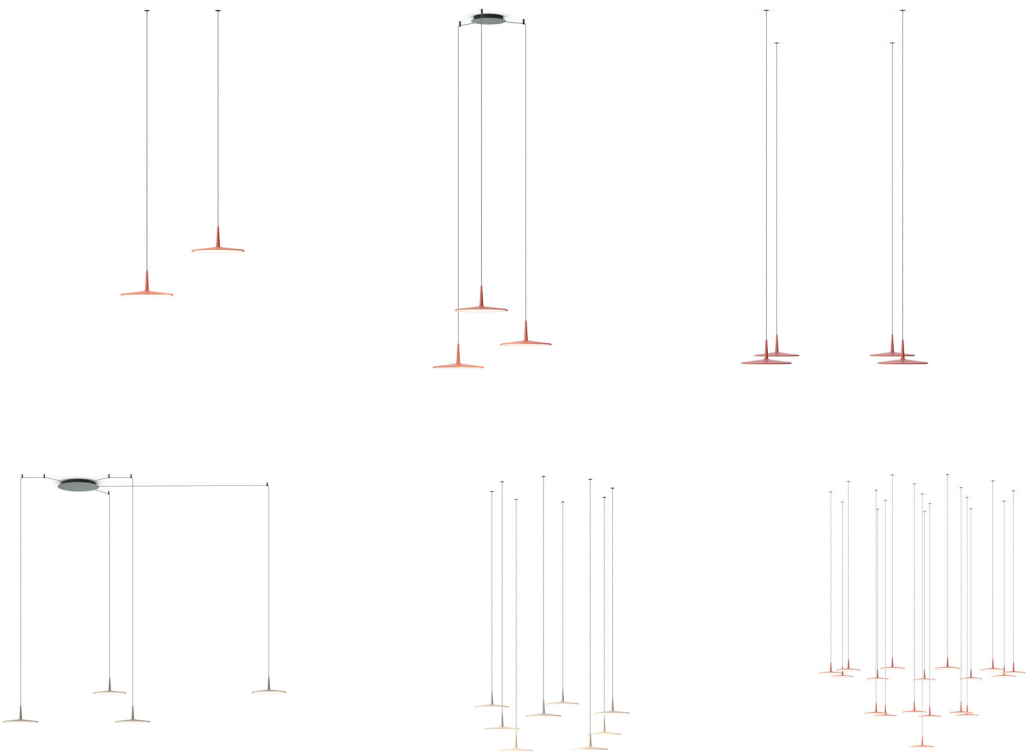

INDIVIDUAL MODEL

0270



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
CRI >90
D

/2 _ 3000 K - 1123 lm
CRI >80
D

/3 _ 3500 K - 1374 lm
CRI >90
G

Control

0270 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **2** 0-10V
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Shade: Aluminum. Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

Extra cable length.

LED | IP20 | Bi-volt

0275



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
CRI >90
F

/2 _ 3000 K - 1575 lm
CRI >80
E


/3 _ 3500 K - 1375 lm
CRI >90
F

Control

0275 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 13,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,71 x 0,66 m
Vol 0,2000 m³
Gross weight 7 Kg Net weight 4,4 Kg


Notes

Extra cable length.

LED | IP20 | Bi-volt

MULTIPLE MODELS


Select your model at **vibia.com** and adjust



2 x 0270



2 x 0270



3 x 0270



3 x 0270



4 x 0270




4 x 0270



5 x 0270




7 x 0270




8 x 0270




8 x 0270



9 x 0270



18 x 0270



16 x 0270



4 x 0270



8 x 0270



9 x 0270



9 x 0270 **From: 3.915,00 €**



16 x 0270 **From: 6.960,00 €**

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
CRI >90
/2 _ 3000 K
CRI >80
/3 _ 3500 K
CRI >90

Control

Model _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **2** 0-10V
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0270

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 17,3 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm | Ø 22 cm | Ø 36 cm | Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 0275

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface




Ø 20 cm


match with fixture finish.

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.


Notes

Additional cable length from 2 m.

LED IP20 Bi-volt

MULTIPLE MODELS

0280



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 3123 lm
CRI >90

/2 _ 3000 K - 3369 lm
CRI >80

/3 _ 3500 K - 4124,7 lm
CRI >90

E

Control

0280 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

3 x LED 9,3 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,2226 m³
Gross weight 13,7 Kg Net weight 9,2 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt

0282



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 5205 lm
CRI >90

/2 _ 3000 K - 5615 lm
CRI >80

/3 _ 3500 K - 6874,5 lm
CRI >90

E

Control

0282 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

5 x LED 9,3 W 350mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3290 m³
Gross weight 36,9 Kg Net weight 29 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt




Wireflow

Design by Arik Levy


Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.

Pendant


4 LEDs




0309
100 x 100 cm



0310
80 x 80 cm




0311
64 x 64 cm




0312
50 x 50 cm


8 LEDs




0299
150 x 150 cm




0300
120 x 120 cm



0301
89 x 89 cm




0302
70 x 70 cm



0303
55 x 55 cm


Product specifications subject to change without notice. Please check vibia.com for updated information.

Personalise your own Wireflow composition quick and easy at **vibia.com**

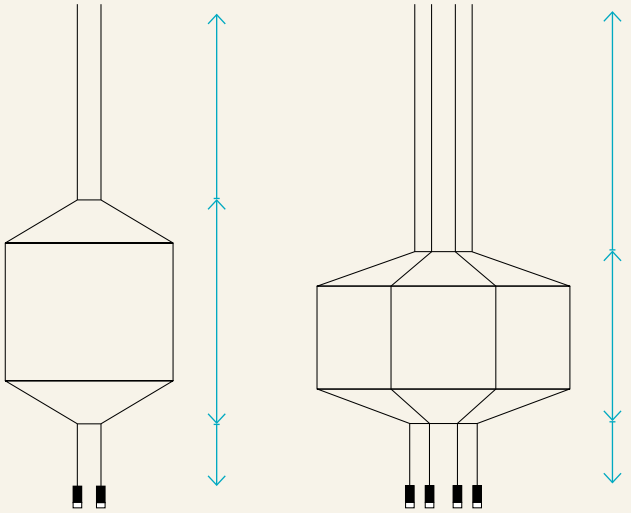


Pressed-glass diffuser.





0299



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 3880 lm
D

/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E

CRI >90

Control

0299 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3245 m³
Gross weight 20,6 Kg Net weight 9,6 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0300



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 3880 lm
D

/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E

CRI >90

Control

0300 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3246 m³
Gross weight 19,95 Kg Net weight 8,95 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0301



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 3880 lm
D

/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E

CRI >90

Control

0301 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,2100 m³
Gross weight 17,75 Kg Net weight 8,75 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0302



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 3880 lm
D

/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E

CRI >90

Control

0302 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1558 m³
Gross weight 14,6 Kg Net weight 8,6 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0303



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
D
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E
CRI >90

Control
0303 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.


Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 13 Kg Net weight 8,5 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0309



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0309 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 12,3 Kg Net weight 5,3 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0310



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0310 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 11,8 Kg Net weight 4,8 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

0311



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0311 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 8,7 Kg Net weight 4,7 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt

0312



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0312 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 8,6 Kg Net weight 4,6 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 Bi-volt



Wireflow Lineal

Design by Arik Levy


Wireflow Lineal's ultra-minimalist design is balanced by a distinctive, precipitous presence that adds an intriguing accent to any room. Ideal for illuminating large spaces with high ceilings, its lean profile traces a formal silhouette in an open space with meticulous precision.

Pendant

2 LEDs

0320


57 cm x max. 200 cm



6 LEDs

0338


145 cm x max. 200 cm

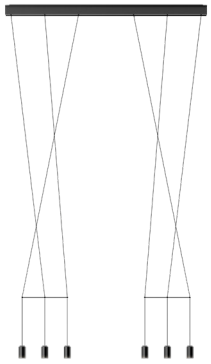

10 LEDs

0330


275 cm x max. 200 cm

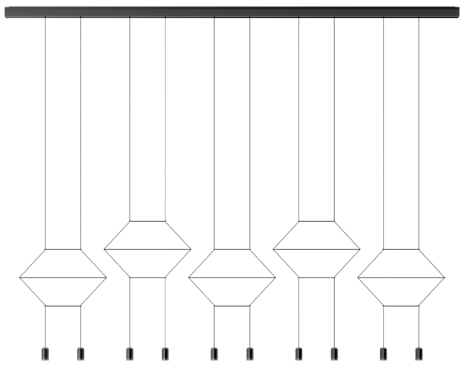

6 LEDs

0325

155 cm x max. 200 cm

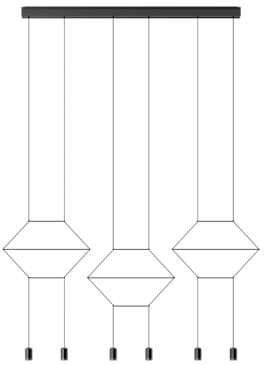



Product specifications subject to change without notice. Please check vibia.com for updated information.

Personalise your own Wireflow Lineal composition quick and easy at **vibia.com**




Without pressed-glass diffuser.

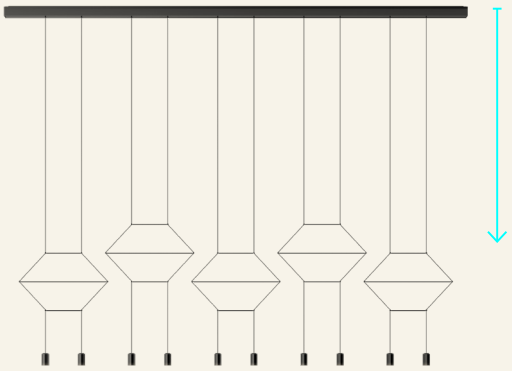

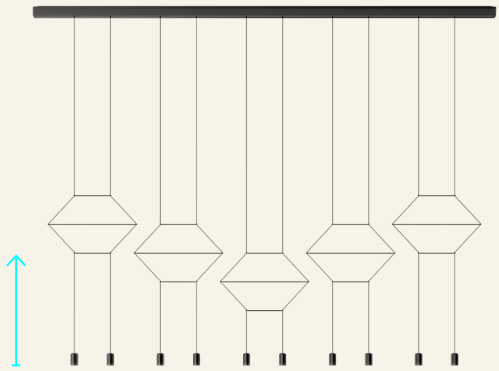

0320



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 970 lm
D

/2 _ 3000 K - 970 lm
/3 _ 3500 K - 1000,6 lm
E

CRI >90

Control

0320 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 0,70 m
Vol 0,0150 m³
Gross weight 5,1 Kg Net weight 2,6 Kg


Notes

Linear canopy

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

0325



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 2910 lm
D
/2 _ 3000 K - 2910 lm
/3 _ 3500 K - 3001,8 lm
E
CRI >90

Control
0325 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.


Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 2,30 m
Vol 0,0345 m³
Gross weight 8 Kg Net weight 4,5 Kg

Notes
Linear canopy

LED IP20 Bi-volt

0330



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 4850 lm
D
/2 _ 3000 K - 4850 lm
/3 _ 3500 K - 5003 lm
E
CRI >90

Control
0330 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.


Light Source and electronics
10 x LED 4,5 W 700 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0495 m³
Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
Linear canopy

LED IP20

0338



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 2910 lm
D
/2 _ 3000 K - 2910 lm
/3 _ 3500 K - 3001,8 lm
E
CRI >90

Control
0338 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics
6 x LED 4,5 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0495 m³
Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
Linear canopy

LED IP20



Wireflow Free

Design by Arik Levy

True to its name, Wireflow Free adapts easily to any environment.
Its cables can be directed to form unexpected visual rhythms
across a wall or ceiling, or to branch out from a central point
and delineate specific activity zones within a space.
Free offers maximum versatility in both form and function.

Pendant

0345

Ø 3 x 200cm



0361

Ø 3 x 200cm



0347

Ø 3 x 50 x 200cm



0348

Ø 3 x 50 x 200cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

0345



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 485 lm
D
/2 _ 3000 K - 485 lm
/3 _ 3500 K - 500,3 lm
E
CRI >90

Control
0345 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.


Light Source and electronics
1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes
With pressed-glass diffuser.
Extra cable length.

LED IP20 Bi-volt

0347



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 490 lm
D
CRI >80

Control
0347 _ _ **/ 15** Push

Materials
Diffuser: PC- Polycarbonate. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,5 Kg Net weight 1,35 Kg

Notes
Without pressed-glass diffuser.
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.

LED IP20 Bi-volt

0348



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 490 lm
D
CRI >80

Control
0348 04 / 15 Push

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,9 Kg Net weight 1,71 Kg

Notes
With pressed-glass diffuser.
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.

LED IP20 Bi-volt

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

0361

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 485 lm
D

/2 _ 3000 K - 485 lm
/3 _ 3500 K - 500,3 lm
E

CRI >90

Control

0361 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi



Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC-Polycarbonate. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m^3
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes

Without pressed-glass diffuser.
Additional cable length personalisation

LED | IP20 | Bi-volt

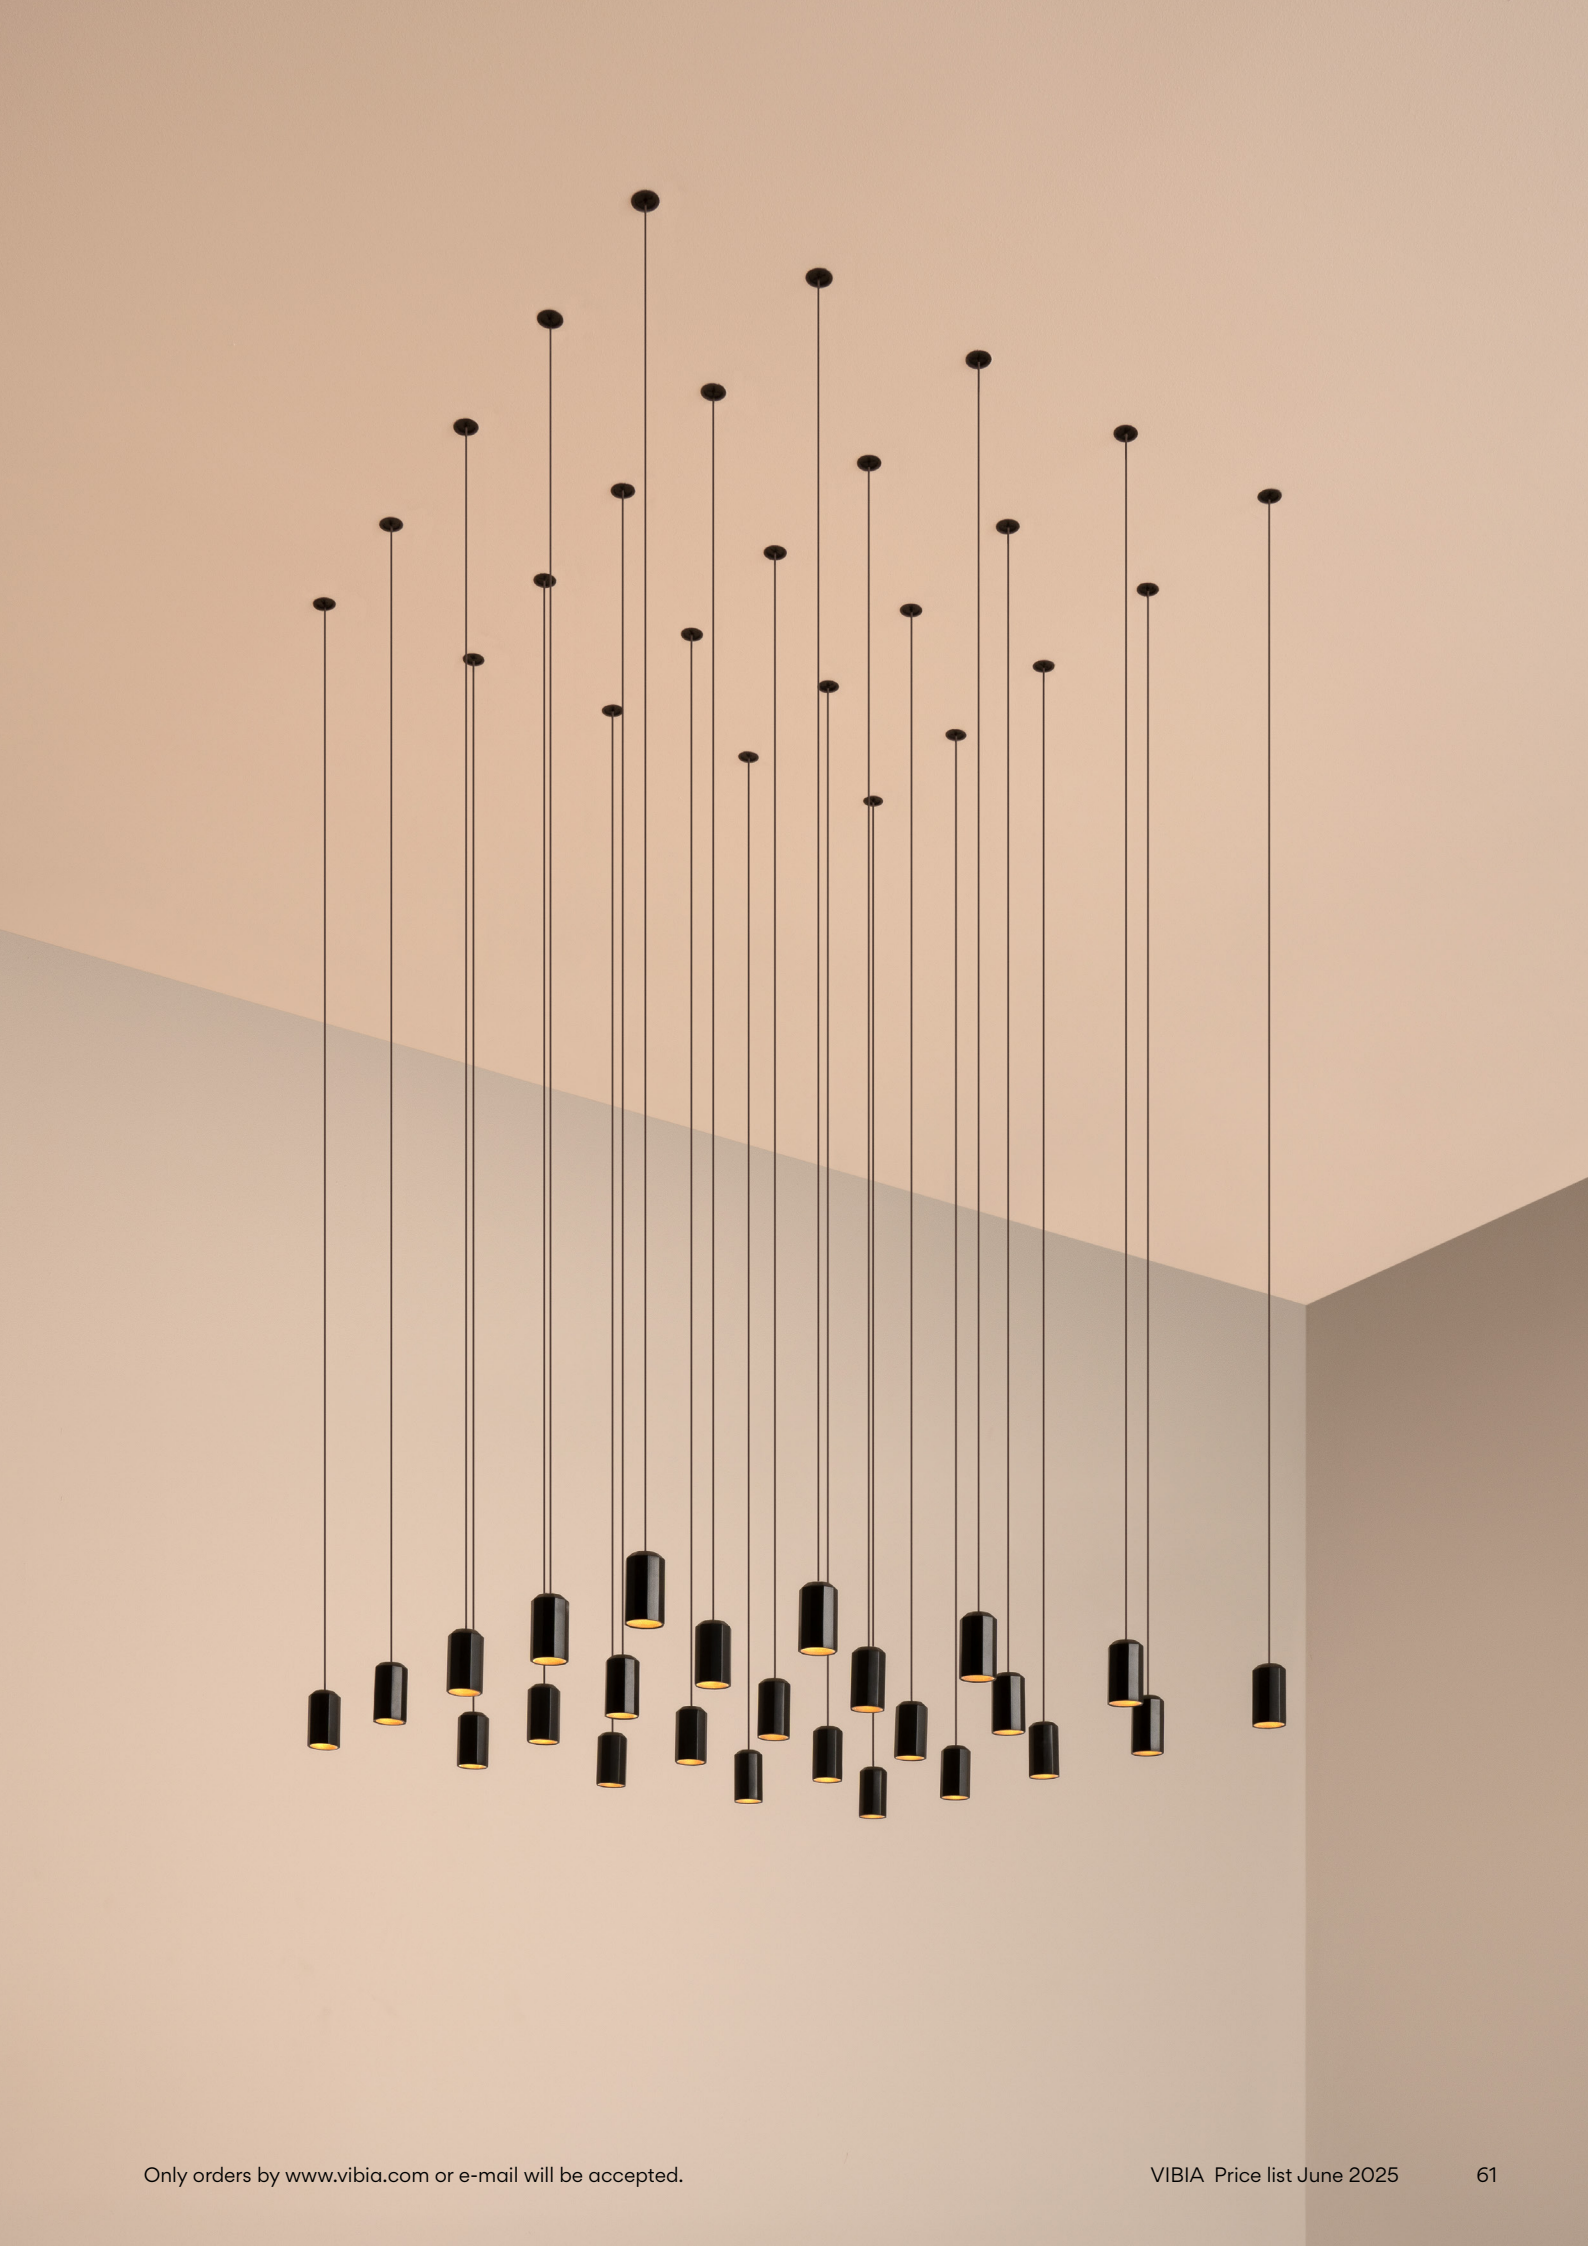


Select your model at **vibia.com** and adjust



2 x 0361



3 x 0345



3 x 0345



4 x 0361




4 x 0345



5 x 0345



5 x 0361



7 x 0345



6 x 0361



8 x 0345




15 x 0361



8 x 0345



9 x 0361



12 x 0345



11 x 0361




41 x 0361



25 x 0345



54 x 0345



45 x 0361

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0345, 0361

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling


_10
Surface



Ø 20 cm

match with fixture finish.

_18
Free Wire

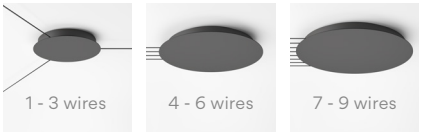


Ø 20 cm

Ø 36 cm


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials

Diffuser: Pressed-glass. / PC- Polycarbonate.
Body: Aluminum. Canopy: Steel.
Ceiling supports: POM.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

Wireflow Chandelier

Design by Arik Levy


Wireflow Chandelier is a contemporary reimagining of the traditional fixture. Its ultramodern silhouette provides an unexpected twist, while its graceful lines echo with a sense of timeless elegance. Though substantial in size its airy outline creates a feeling of transparency.

Pendant

20 LEDs

0315


120 x 279 cm

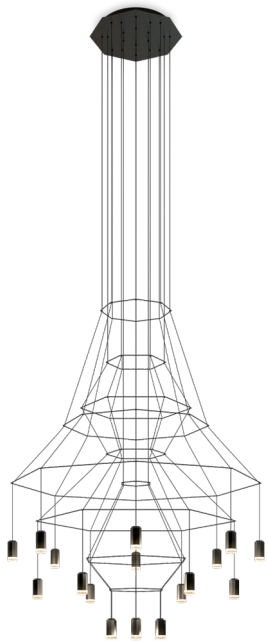

43 LEDs

0374


150 x 307 cm

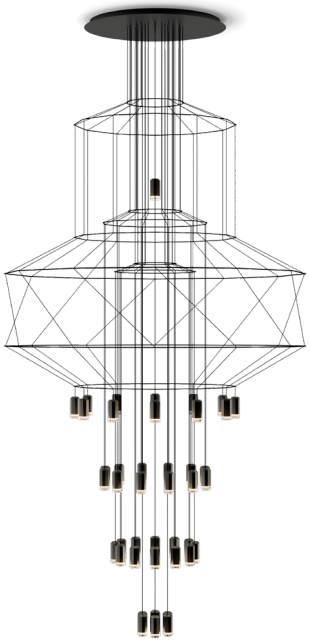

43 LEDs

0375


150 x 396 cm

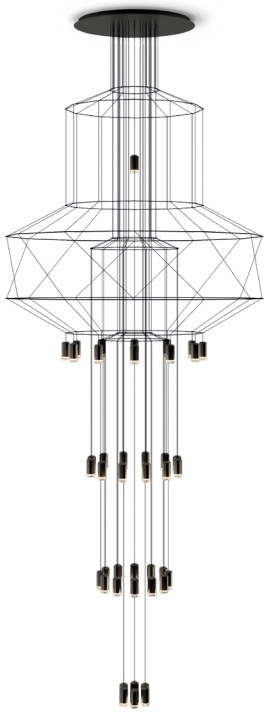

42 LEDs

0376


150 x 112 cm



42 LEDs

0377


150 x 194 cm

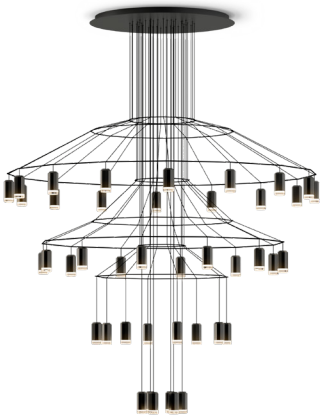

42 LEDs


0378


150 x 276 cm

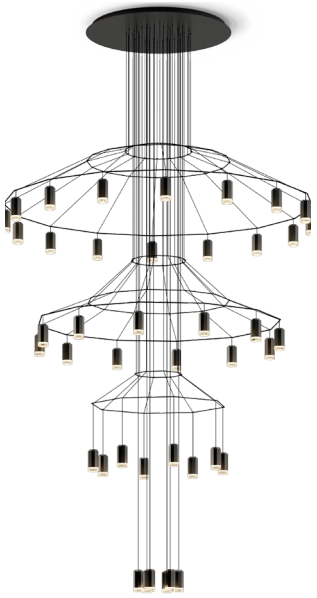


Product specifications subject to change without notice. Please check vibia.com for updated information.

Personalise your own Wireflow Chandelier composition quick and easy at **vibia.com**

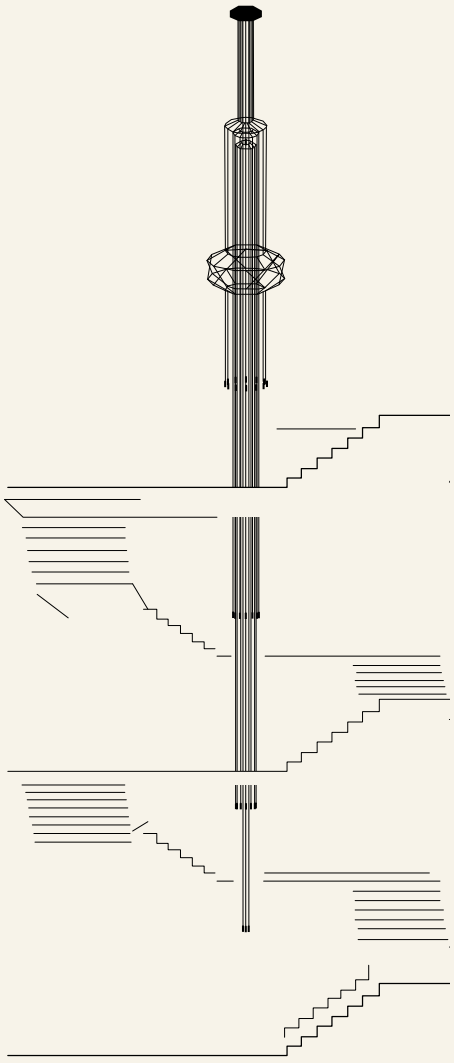

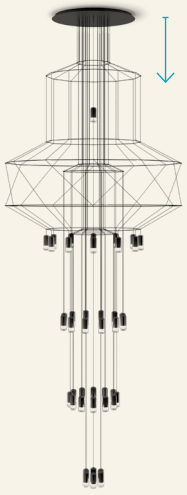


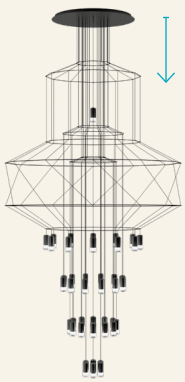

For configurations longer than 9 m, please ask Vibia customer service.



0315

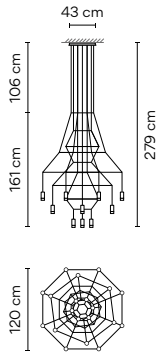

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 9700 lm
D

/2 _ 3000 K - 9700 lm
/3 _ 3500 K - 10006,1 lm
E

CRI >90

Control

0315 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

20 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3832 m³
Gross weight 32 Kg Net weight 18 Kg


Notes

Configuration layout at **vibia.com**

Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

0374

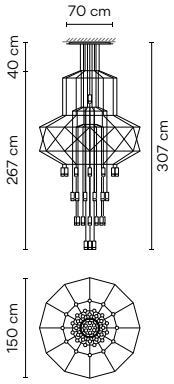

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 20855 lm
D

/2 _ 3000 K - 20855 lm
/3 _ 3500 K - 21513,1 lm
E

CRI >90

Control

0374 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

43 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5000 m³
Gross weight 57 Kg Net weight 47 Kg


Notes

Configuration layout at **vibia.com**

Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

0375

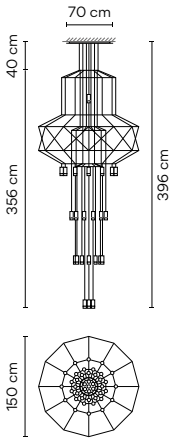

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 20855 lm
D

/2 _ 3000 K - 20855 lm
/3 _ 3500 K - 21513,1 lm
E

CRI >90

Control

0375 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

43 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5000 m³
Gross weight 57 Kg Net weight 47 Kg

Notes


Configuration layout at **vibia.com**

Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0376



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control
0376 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.


Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at **vibia.com**
Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

0377



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control
0377 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.


Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at **vibia.com**
Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

0378

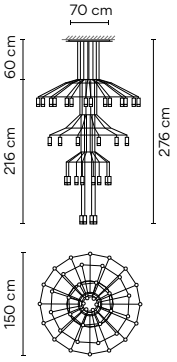

Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control
0378 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at **vibia.com**
Min. quantity, upcharge and extra lead time apply


LED IP20 Bi-volt

I.Cono

Design by Lievore, Altherr, Molina

I.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

Table Floor Wall

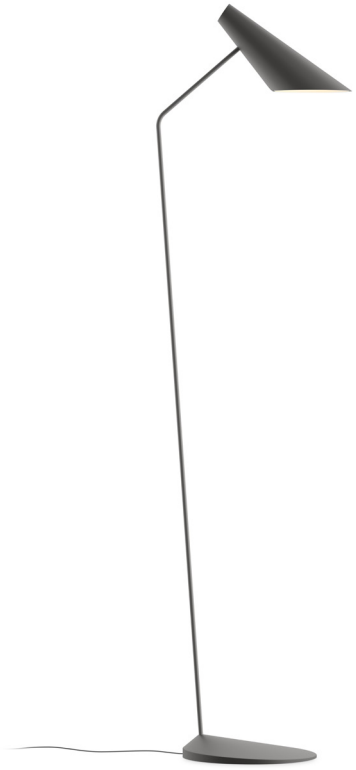

0712
21 x 130 x 35 cm



0700
17 x 56 x 32 cm




0720
15 x 17 x 26 cm



0721
15 x 17 x 26 cm

0700



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0700 _ _ / _ _
- _ _ / **15** Push
- _ _ / **1Y** ProtoPixel*
- _ _ / **1Z** Casambi

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz


Packaging
1 Box 0,81 x 0,31 x 0,33 m
Vol 0,08 m^3
Gross weight 2,6 Kg Net weight 1,9 Kg

Notes
Electric cable 2,5 m.
On/off switch on the cable.
*Available from January 2025.

LED ☐ IP20 CE UK CA EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

0712

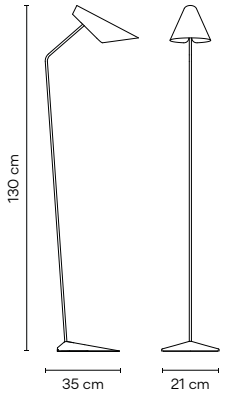

Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0712 _ _ / _ _
- _ _ **/ 15** Push
- _ _ **/ 1Y** ProtoPixel*
- _ _ **/ 1Z** Casambi

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.


Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

Packaging
1 Box 1,43 x 0,30 x 0,30 m
Vol 0,13 m³
Gross weight 4 Kg Net weight 3 Kg

Notes
Electric cable 2,5 m.
On/off switch on the cable.
*Available from January 2025.

LED IP20

0720



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0720 _ _ **/ 10** On/ Off

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.


Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

Packaging
1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m³
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes
On/off switch on the base.

LED IP20

0721



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0721 _ _ / _ _
- _ _ **/ 10** On/ Off
- _ _ **/ 1D** _ **30** Push; DALI (Remote)
- _ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

Packaging
1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m³
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes
Without switch.

LED IP20

Algorithm Grid

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions.
Can be customized to suit any space.


Pendant

*** Built-in version**

6 LEDs

0830 *0832


123 x 25 cm



10 LEDs

0835 *0837

214 x 25 cm



14 LEDs

0840 *0842


306 x 25 cm



14 LEDs

0845 *0847

183 x 34 cm



29 LEDs

0850 *0852

399 x 34 cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

10 LEDs

0825 *0827


75 x 85 cm



13 LEDs

0860 *0862

110 x 110 cm



25 LEDs

0865 *0867


160 x 160 cm



15 LEDs

0870 *0872


110 x 60 cm





24 LEDs


0875 *0877


185 x 60 cm




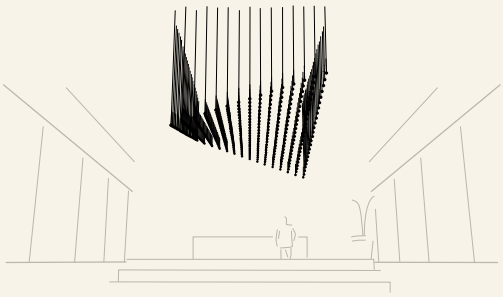




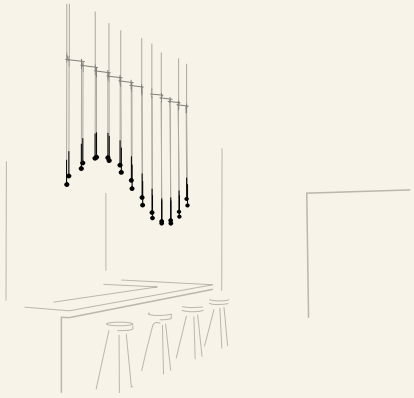

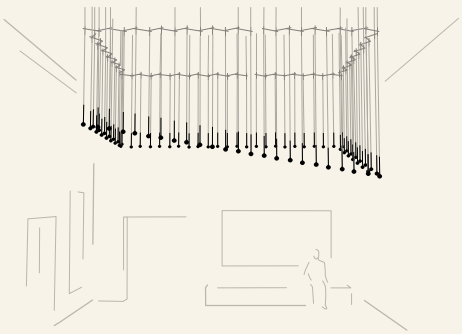

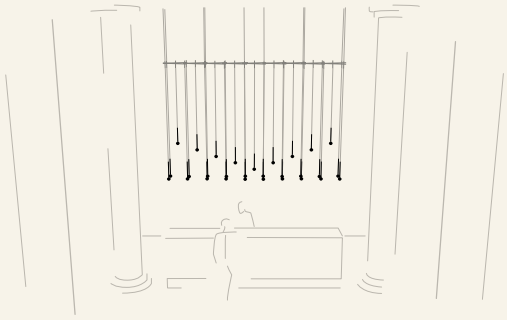

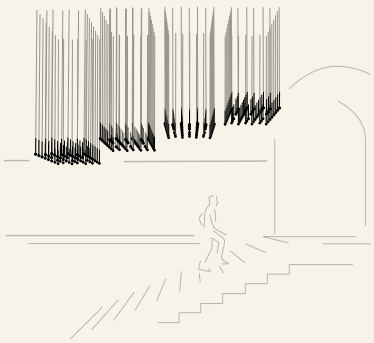

Surface.



Built-in.
11,5 cm Die-cut diameter,
12 cm minimum height in ceiling.



Adjustable cable installation.



Rigid stem installation.
Fixed at 25 cm.




Product specifications subject to change without notice. Please check vibia.com for updated information.

Adjust height of standard model


To personalize luminaire height,
without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own Algorithm composition quick and easy at **vibia.com**

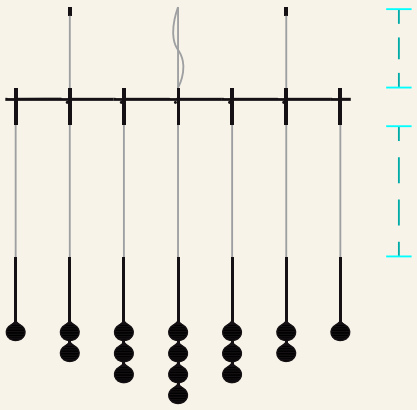

0825



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0825 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Surface

LED IP20 Bi-volt

0827



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0827 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

0830



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 1873,68 lm
/3 _ 3500 K - 1873,7 lm
F
CRI >90

Control
0830 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
6 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1705 m³
Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
Surface

LED IP20 Bi-volt

0832



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 1873,68 lm
/3 _ 3500 K - 1873,7 lm
F
CRI >90

Control
0832 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
6 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1705 m³
Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

0835



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0835 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Surface

LED IP20 Bi-volt

0837



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0837 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

0840



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0840 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes
Surface

LED | IP20 | CE | UK CA | EAC | Bi-volt

0842



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0842 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes
Built-in

LED | IP20 | CE | UK CA | EAC
Bi-volt | Ø 10,5 cm

0845



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0845 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes
Surface

LED | IP20 | CE | UK CA | EAC | Bi-volt

0847



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0847 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes
Built-in

LED | IP20 | CE | UK CA | EAC
Bi-volt | Ø 10,5 cm

0850



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 9056,12 lm
/3 _ 3500 K - 9056,12 lm
F
CRI >90

Control
0850 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
29 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6260 m³
Gross weight 26 Kg Net weight 20 Kg

Notes
Surface

LED IP20 Dimmer Bi-volt

0852



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 9056,12 lm
/3 _ 3500 K - 9056,12 lm
F
CRI >90

Control
0852 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
29 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6260 m³
Gross weight 26 Kg Net weight 20 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

0860



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4059,64 lm
/3 _ 3500 K - 4059,64 lm
F
CRI >90

Control
0860 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
13 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3290 m³
Gross weight 17,35 Kg Net weight 11,85 Kg

Notes
Surface

LED IP20 Bi-volt

0862



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4059,64 lm
/3 _ 3500 K - 4059,64 lm
F
CRI >90

Control
0862 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
13 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,3290 m³
Gross weight 17,35 Kg Net weight 11,85 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

0865



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7807 lm
/3 _ 3500 K - 7807 lm
F
CRI >90

Control
0865 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
25 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Surface

LED IP20 Bi-volt

0867



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7807 lm
/3 _ 3500 K - 7807 lm
F
CRI >90

Control
0867 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
25 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

0870



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4684,2 lm
/3 _ 3500 K - 4684,2 lm
F
CRI >90

Control
0870 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
15 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2679 m³
Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
Surface

LED IP20 Bi-volt

0872



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4684,2 lm
/3 _ 3500 K - 4684,2 lm
F
CRI >90

Control
0872 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
15 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,2679 m³
Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
Built-in

LED IP20 Bi-volt Ø 10,5 cm

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

0875



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7494,72 lm
/3 _ 3500 K - 7494,72 lm
F
CRI >90

Control
0875 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
24 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,4500 m³
Gross weight 30,1 Kg Net weight 22,1 Kg

Notes
Surface

LED IP20 Bi-volt

0877



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7494,72 lm
/3 _ 3500 K - 7494,72 lm
F
CRI >90

Control
0877 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
24 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,4500 m³
Gross weight 30,1 Kg Net weight 22,1 Kg

Notes
Built-in

LED IP20
Bi-volt Ø 10,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.


MUSEU D'ART CONTEMPORANI

Algorithm Free

Design by Toan Nguyen

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

Like a cloud of frozen rain, this collection brings together beauty and geometry. Each unique grouping of globes defines areas of interior space, underlining their multiple uses while becoming a single aesthetic element.

INDIVIDUAL MODEL


Pendant

0820

Ø 9 cm



0820



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 312,28 lm
E

/3 _ 3500 K - 312,3 lm
F

CRI >90

Control

0820 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

1 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,18 x 0,55 x 0,55 m
Vol 0,0131 m^3
Gross weight 2,17 Kg Net weight 1,57 Kg

Notes

Surface.

Extra cable length.

LED | IP20 | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Select your model at **vibia.com** and adjust



2 x 0820



3 x 0820




3 x 0820



3 x 0820



4 x 0820



4 x 0820



5 x 0820



5 x 0820



5 x 0820



7 x 0820



6 x 0820



7 x 0820




15 x 0820



9 x 0820




10 x 0820



20 x 0820



41 x 0820



30 x 0820



54 x 0820

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K
/3 _ 3500 K

CRI >90

Control

0820 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0820

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.


Regular ceiling

_10
Surface




Ø 19 cm


match with fixture finish.



Ø 22 cm




Ø 36 cm




Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

Slim

Design by Jordi Vilardell

Streamlined and refined,
Slim serves as a sleek punctuation mark.

Pendant

INDIVIDUAL MODEL


0920


Ø 2,6 cm





MULTIPLE MODELS










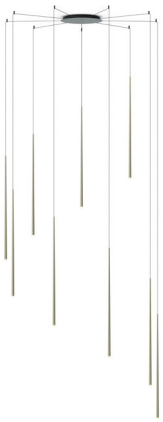


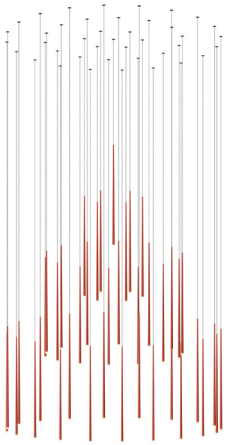

Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

0920



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
F
CRI >90

/2 _ 3000 K - 163,2 lm
G
CRI >80

/3 _ 3500 K - 207,6 lm
F
CRI >90

Control

0920 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 1,20 m
Vol 0,0155 m^3
Gross weight 2,14 Kg Net weight 1,2 Kg

Notes

Surface.
Extra cable length.

LED IP20 Bi-volt






Select your model at **vibia.com** and adjust




2 x 0920




3 x 0920



3 x 0920




3 x 0920



4 x 0920



4 x 0920




4 x 0920




5 x 0920




5 x 0920



5 x 0920



7 x 0920



8 x 0920




15 x 0920




9 x 0920




9 x 0920




17 x 0920



41 x 0920



40 x 0920



54 x 0920

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0920_ _ / _ 0

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 17,3 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

For Ref. 0920_ _ / _ 1 / _ B / _ Z

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 20 cm

match with fixture finish.

_18
Free Wire




Ø 20 cm

Ø 36 cm


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials

Diffuser: Glass. Body: FG- Fiberglass .
Canopy: Steel.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

Pendant

0917

Ø 28 cm



0931

24 x 24 cm




0933

38 x 24 cm




0937

53 x 26 cm

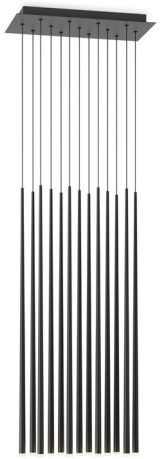


0935

Ø 69 cm

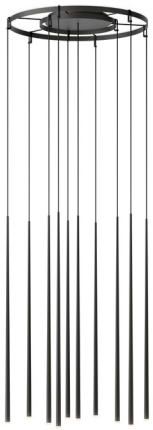


0940

Ø 100 cm

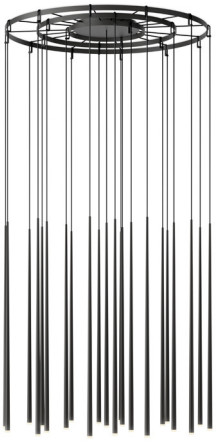

MULTIPLE MODELS

0917



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 724,88 lm
F
CRI >90
/2 _ 3000 K - 652,8 lm
G
CRI >80
/3 _ 3500 K - 830,6 lm
F
CRI >90

Control

0917 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1278 m^3
Gross weight 8 Kg Net weight 5,2 Kg


Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0931



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 724,88 lm
F
CRI >90

/2 _ 3000 K - 652,8 lm
G
CRI >80

/3 _ 3500 K - 830,6 lm
F
CRI >90

Control

0931 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 8 Kg Net weight 5,2 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt

0933



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1087,32 lm
F
CRI >90

/2 _ 3000 K - 979,2 lm
G
CRI >90

/3 _ 3500 K - 1245,9 lm
F
CRI >90

Control

0933 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

6 x LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 9,1 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt

0935



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 954,5 lm
CRI >90

/2 _ 3000 K - 1140 lm
CRI >80

/3 _ 3500 K - 1093,7 lm
CRI >90

F

Control

0935 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

10 x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4410 m^3
Gross weight 19,2 Kg Net weight 14,2 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt

0937



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2355,86 lm
F
CRI >90

/2 _ 3000 K - 2121,6 lm
G
CRI >80

/3 _ 3500 K - 2699,4 lm
F
CRI >90

Control

0937 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

13 x LED 2,1W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m^3
Gross weight 12,5 Kg Net weight 18,46 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt

0940



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2099,9 lm
CRI >90

/2 _ 3000 K - 2508 lm
CRI >80

/3 _ 3500 K - 2406,1 lm
CRI >90

F

Control

0940 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

22 x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4420 m^3
Gross weight 29,9 Kg Net weight 21,9 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 Bi-volt



Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

Ceiling Wall



1154

Ø 17 cm



1155

Ø 40 cm



1160


Ø 60 cm



1170

Ø 90 cm

1154



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 550 lm
E
/3 _ 3500 K - 540,2 lm
F
CRI >90

Control

1154 _ _ **/** _ **0** On/ Off

Materials

Body: Aluminum.

Light Source and electronics


1 x LED PLATE 5,5 W 150 mA
Constant Current 150 mA
100~240V 50/60Hz

Packaging

1 Box 0,2 x 0,2 x 0,1 m
Vol 0,004 m³
Gross weight 0,8 Kg Net weight 0,5 Kg

LED IP20 Bi-volt

1155



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2050 lm
F
/3 _ 3500 K - 2013,4 lm
G
CRI >90

Control

1155 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics


1 x LED PLATE 18,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,45 x 0,45 x 0,15 m
Vol 0,03 m³
Gross weight 1,8 Kg Net weight 1,5 Kg


LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

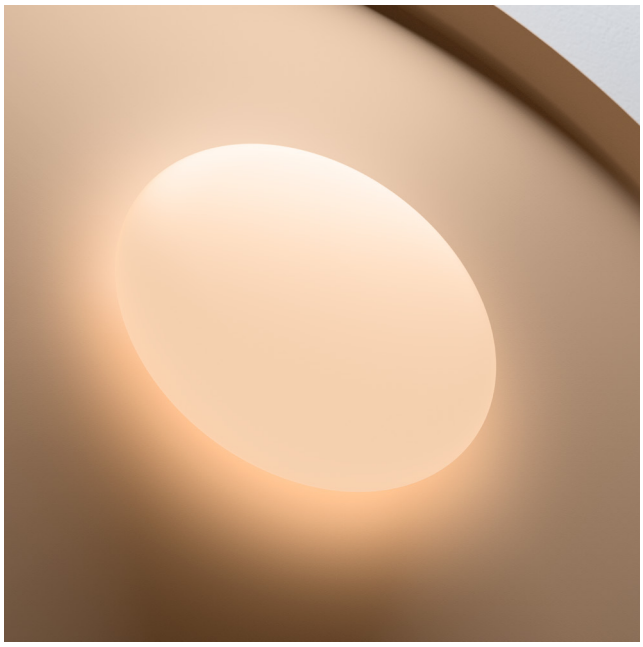



1160



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2880 lm
E

/3 _ 3500 K - 2828,6 lm
F

CRI >90

Control

1160 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics


1 x LED PLATE 26,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,65 x 0,65 x 0,15 m
Vol 0,063 m³
Gross weight 3,13 Kg Net weight 2,5 Kg

LED IP20 Bi-volt

1170



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 4056,81 lm
F

/3 _ 3500 K - 4243,6 lm
G

CRI >90

Control

1170 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

3 x LED 13,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 1 x 1 x 0,2 m
Vol 0,02 m³
Gross weight 7,7 Kg Net weight 5,3 Kg

LED IP20

Jazz

Design by Diego Fortunato

Undulating and fluid, Jazz's smooth silhouette is strikingly organic. The gently curved design imparts a playful presence, like an oversized chess piece standing guard.


Floor



1329

Ø 25 x 190 cm

1329



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
45 Blue D1
(NCS S 7010-B10G)

LED Colour Temperature

/1 _ 2700 K - 3736 lm
E
CRI >90

Control

1329 _ _ / _ _

_ _ **/ 15** Push
_ _ **/ 1Z** Casambi
_ _ **/ 1Y** ProtoPixel*

Materials

Body: PU- Polyurethane.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 37,2W 1050 mA
Constant Current 1050 mA
100~240Vac 50/60Hz

Packaging

2 Boxes
Total Vol 0,1880 m³
Gross weight 19,8 Kg Net weight 15 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Dimmer on the cable. Electric cable 2,5 m.

IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it,
Flamingo projects a feeling of weightlessness hovering overhead.
The deconstructed design separates the LED light source from its
translucent shades, producing gradations of diffuse illumination.

Pendant

1510

Ø 70 cm



1527

Ø 90 cm



1530

Ø 90 cm



1540

Ø 70 cm



1550

Ø 90 cm



1560

Ø 90 cm




1570

Ø 90 cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

1510



Finishes
18/ _ _ Graphite
(RAL 7016)
20/ _ _ Gold
(Gold)
67/ _ _ Copper
(Copper)
93/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1108,02 lm
/3 _ 3500 K - 1278,8 lm
F
CRI >90

Control
1510 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.


Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1320 m³
Gross weight 8,7 Kg Net weight 7,8 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

1527



Finishes
18/ _ _ Graphite
(RAL 7016)
20/ _ _ Gold
(Gold)
67/ _ _ Copper
(Copper)
93/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1108,02 lm
/3 _ 3500 K - 1278,8 lm
F
CRI >90

Control
1527 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.


Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,12 x 0,80 x 0,79 m
Vol 0,0634 m³
Gross weight 4,1 Kg Net weight 3,69 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

1530



Finishes
18/ _ _ Graphite
(RAL 7016)
20/ _ _ Gold
(Gold)
67/ _ _ Copper
(Copper)
93/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
CRI >90

Control
1530 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz


Packaging
3 Boxes
Total Vol 0,1520 m³
Gross weight 10 Kg Net weight 7 Kg

Notes
Extra cable length.

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

1540



Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 554,01 lm
/3 _ 3500 K - 639,4 lm
F
CRI >90

Control
1540 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.


Light Source and electronics
1 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0620 m³
Gross weight 6 Kg Net weight 4 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

1550



Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
CRI >90

Control
1550 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.


Light Source and electronics
3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1520 m³
Gross weight 11,3 Kg Net weight 8,8 Kg

Notes
Extra cable length.

LED IP20

1560



Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
CRI >90

Control
1560 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.


Light Source and electronics
3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1860 m³
Gross weight 12,7 Kg Net weight 10,2 Kg

Notes
Extra cable length.

LED IP20

1570

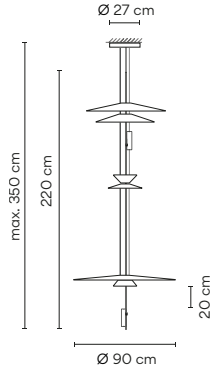

Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 2216,04 lm
/3 _ 3500 K - 2557,6 lm
F
CRI >90

Control
1570 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PMMA . Shade: PMMA.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics
4 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1633 m³
Gross weight 10 Kg Net weight 8,64 Kg

Notes
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.




Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

Pendant


1575
Ø 45 cm

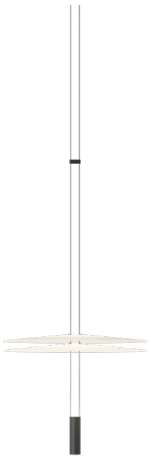

1580
Ø 9 cm



1585
Ø 45 cm

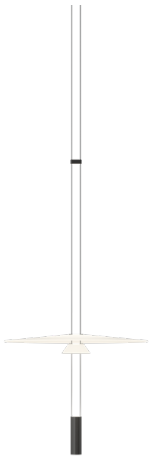

1590
Ø 45 cm

Option A



Option B



Option C



Three options of installation


1575

Finishes
11/ _ _ Black
(NCS S 8500-N)


LED Colour Temperature
/1 _ 2700 K - 726 lm
E
CRI >90

Control
1575 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi



Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz


Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes
Additional cable length
personalisation

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1580




Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 726 lm
E
CRI >90

Control
1580 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Select Eletrical connection


Surface


Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.


Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,068 x 0,068 x 1,25 m
Box 2: 0,20 x 0,21 x 0,13 m
Total Vol 0,0112 m³
Gross weight 4 Kg Net weight 3 Kg

Notes
Additional cable length
personalisation

LED □ IP20 CE UK CA EAC Bi-volt

1585



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 726 lm
E
CRI >90

Control
1585 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Select Eletrical connection


Surface


Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes
Additional cable length
personalisation

LED □ IP20 CE UK CA EAC Bi-volt

Flamingo Mini

1160 | 10 | /1 | A | _18 | __

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant


1590

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1152 lm
E
CRI >90

Control
1590 _ _ / _ _

_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi



Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
3 x LED COB 3W 185 mA
Constant Current 550 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,60 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0494 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
Additional cable length
personalisation

LED IP20 Bi-volt

Select Eletrical connection

Choose your preferred installation option
according to your needs.

Drop ceiling

_23
Built-in XS



Ø 8 cm
height 6 cm

black finish.

Regular ceiling


_10
Surface



Ø 16 cm

black finish.

Built-in



Product specifications subject to change without notice. Please check vibia.com for updated information.




Pin

Design by Ichiro Iwasaki

A timeless proposal from Japanese designer Ichiro Iwasaki, the Pin is both classic and contemporary. Characterised by a graceful stem and subtle, functional expression, it is small in scale but with exceptional lighting efficiency.

Table

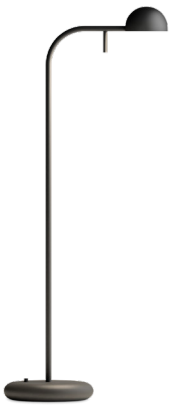

1650


23 x 55 cm



1655

40 x 55 cm

1650



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 485 lm
E

CRI >90

Control

1650 _ _ **/ 10** On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,174 x 0,212 x 0,713 m
Vol 0,0212 m^3
Gross weight 2,94 Kg Net weight 2 Kg

Notes

Switch on the base. Electric cable 3 m


LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



1160 | 10 | /1 | A
Model
Finish
LED Colour Temperature
Control

1655



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1655 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,20 x 0,357 x 0,67 m
Vol 0,0480 m^3
Gross weight 3,68 Kg Net weight 2,2 Kg


Notes
Switch on the base. Electric cable 3 m

LED IP20 Bi-volt

Floor

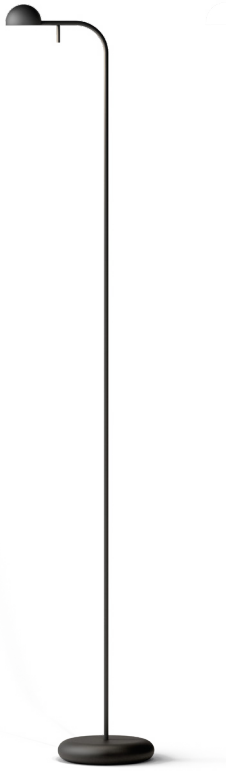


1660
25 x 125 cm

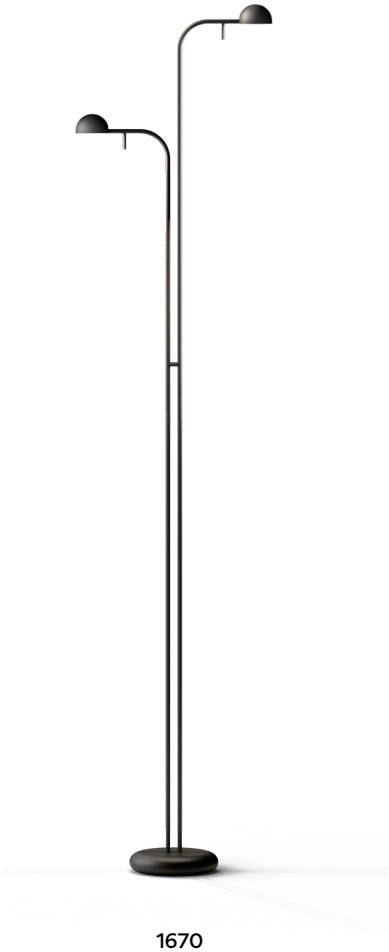

1670
35 x 143 cm

1660



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1660 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,149 x 0,265 x 0,33 m
Vol 0,1310 m^3
Gross weight 7,45 Kg Net weight 3,8 Kg

Notes
Switch on the cable. Electric cable 3 m

LED IP20 Bi-volt



1670

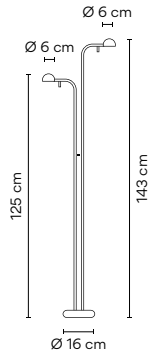

Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1670 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rods: Steel.


Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 1,496 x 0,265 x 0,33 m
Vol 0,1310 m^3
Gross weight 8,25 Kg Net weight 4,6 Kg

Notes
Switch on the cable. Electric cable 3 m

LED IP20 Bi-volt

Wall



ø 10 cm
1675 62



Ø 10 cm
1675 11



Ø 10 cm
1675 58



Ø 10 cm
1675 23



25 x 39 cm
1680



30 x 70 x 8 cm
1685



30 x 70 x 8 cm
1686



Ø 10 x 40 x 8 cm
1690




Ø 10 x 70 x 8 cm
1692



70 x 40 x 8 cm
1694

1675



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1675 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,193 x 0,148 x 0,161 m
Vol 0,0046 m^3
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes
Switch on the wall plate

LED IP20 Bi-volt

1680



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1680 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m^3
Gross weight 1,745 Kg Net weight 1 Kg

Notes
Switch on the wall plate

LED IP20 Bi-volt

1685



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1685 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.


Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m^3
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes
Switch on the wall plate

LED IP20 Bi-volt

1686



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1686 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.


Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m³
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes
Switch on the wall plate

LED IP20 Bi-volt

1690



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1690 _ _ **/ 10** On/ Off


Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m³
Gross weight 1,545 Kg Net weight 0,8 Kg

LED IP20 Bi-volt

1692



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1692 _ _ **/ 10** On/ Off


Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,44 Kg Net weight 1 Kg

LED IP20 Bi-volt

1694



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1694 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,84 Kg Net weight 1,4 Kg


LED IP20 Bi-volt

Offset


Design by Xuclà

Offset combines intuitive lighting with an industrial, geometric silhouette. A complementary system of superficial ceiling, wall and floor fixtures, the collection integrates five lighting effects with advanced colour and temperature regulation for a carefully curated atmosphere.


Ceiling - Accent Downlight




1720
15 x 4 x 7 cm



1722
25 x 4 x 7 cm




1725
15 x 15 x 7 cm



1727
15 x 15 x 7 cm

1720
UGR <20



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control
1720 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **5** Push
- _ _ / _ **Y** ProtoPixel*
- _ _ / _ **Z** Casambi


Materials
Body: Aluminum.

Light Source and electronics
1 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,10 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 1 Kg Net weight 0,4 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20 CE UKCA EAC




H = 1,5 m
H = 3 m

ø 0,7 m	331 lx
Ø 1,4 m	83 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

1722



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1353 lm
/2 _ 3000 K - 1413 lm
/3 _ 3500 K - 1467 lm

E

CRI >90

Control

1722 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

3 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,10 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 1,1 Kg Net weight 0,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20



d 0,7 m x D 0,77 m 987 lx
d 1,4 m x D 1,45 m 250 lx

1725



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 902 lm
/2 _ 3000 K - 942 lm
/3 _ 3500 K - 978 lm

E

CRI >90

Control

1725 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,20 x 0,21 x 0,13 m
Vol 0,005 m³
Gross weight 1,2 Kg Net weight 0,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20



d 0,7 m x D 0,73 m 659 lx
d 1,4 m x D 1,42 m 167 lx

1727



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 902 lm
/2 _ 3000 K - 942 lm
/3 _ 3500 K - 978 lm

E

CRI >90

Control

1727 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,20 x 0,21 x 0,13 m
Vol 0,005 m³
Gross weight 1,2 Kg Net weight 0,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20




d 0,7 m x D 0,73 m 659 lx
d 1,4 m x D 1,42 m 167 lx




Product specifications subject to change without notice. Please check vibia.com for updated information.


Ceiling - High Comfort Diffuser




1728
40 x 4 x 7 cm




1730
65 x 4 x 7 cm

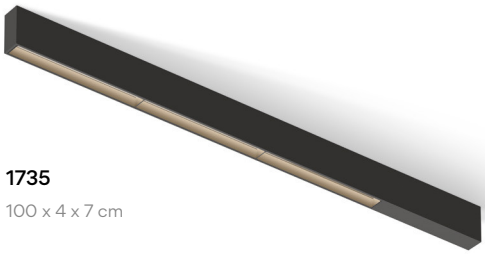

1735
100 x 4 x 7 cm




1740
31 x 15 x 7 cm



1745
31 x 15 x 7 cm

1728
UGR <21



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control
1728 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials
Body: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz


Packaging
1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

1730
UGR <24



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1842 lm - 2150 lm

F

CRI >90

Control

1730 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4W 650mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,8W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,1 Kg Net weight 1,4 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20 CE UKCA EAC

1735

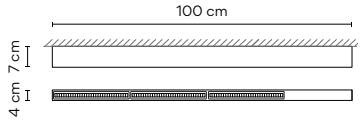

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5022 lm
/2 _ 3000 K - 5199 lm
/3 _ 3500 K - 5373 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
2763 lm - 3225 lm

F

CRI >90

Control

1735 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,1 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 31,2 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,9 Kg Net weight 1,8 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20 CE UKCA EAC

1740
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control

1740 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

1745
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control

1745 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20


Ceiling - Linear High Efficiency Low Glare




1729
40 x 4 x 7 cm




1732
65 x 4 x 7 cm

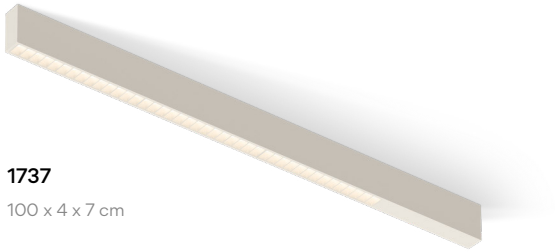

1737
100 x 4 x 7 cm




1742
32 x 15 x 7 cm



1747
31 x 15 x 7 cm

1729
UGR <18



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1842 lm - 2150 lm

F

CRI >90

Control

1729 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **5**	Push
_ _ / _ **Y**	ProtoPixel*
_ _ / _ **Z**	Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Y**	Tunable White + ProtoPixel*
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.


LED IP20



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

1732
UGR <20



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1842 lm - 2150 lm

F

CRI >90

Control

1732 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,8 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,1 Kg Net weight 1,4 Kg

Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.


LED IP20



d 1,4 m x D 1,5 m 836 lx
d 2,8 m x D 3 m 209 lx

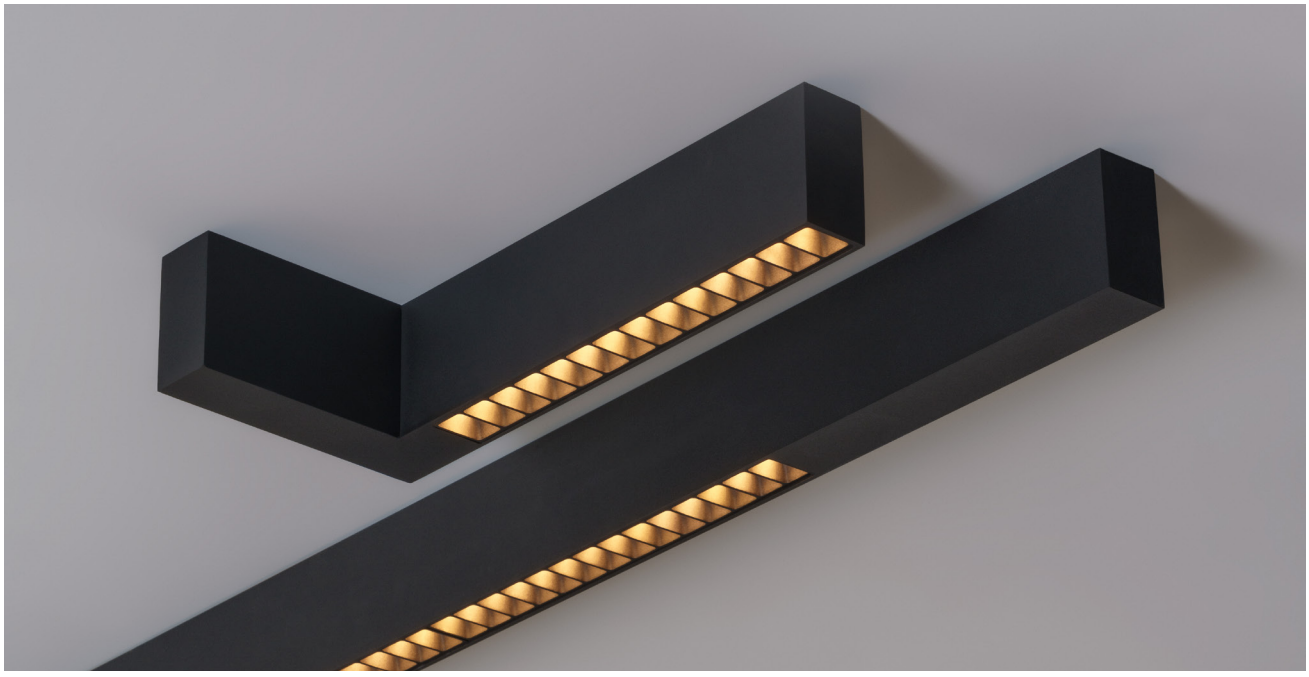

1737
UGR <20

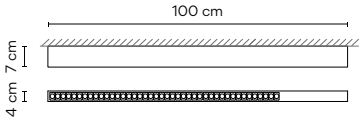

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5022 lm
/2 _ 3000 K - 5199 lm
/3 _ 3500 K - 5373 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
2763 lm - 3225 lm

F

CRI >90

Control

1737 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Y** Tunable White + ProtoPixel*
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,1 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 31,2 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,9 Kg Net weight 1,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20



d 1,4 m x D 1,8 m 1254 lx
d 2,8 m x D 3,6 m 312 lx

1742



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White

/8 _ (2200 K - 4000 K) 921 lm - 1075 lm

F

CRI >90

Control

1742 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Y**	ProtoPixel*
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Y**	Tunable White + ProtoPixel*
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

1747



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control

1747 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Y**	ProtoPixel*
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Y**	Tunable White + ProtoPixel*
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

LED IP20




d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

Ceiling - Flat Diffuser




1755
125 x 4 x 7 cm

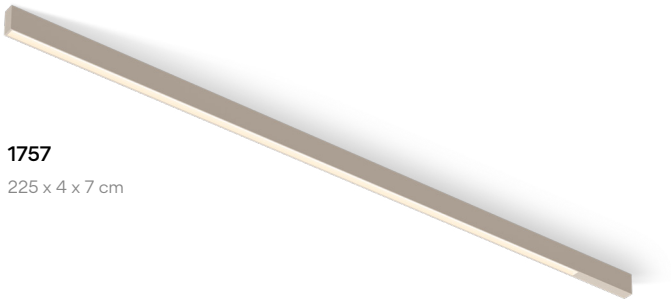

1757
225 x 4 x 7 cm

1755

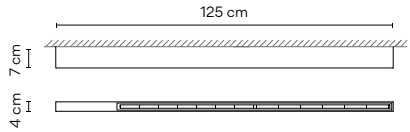

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1751,96 lm - 2395,6 lm

F

CRI >90

Control

1755 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Y**	ProtoPixel*
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Y**	Tunable White + ProtoPixel*
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,6 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,1 x 0,106 x 1,5 m
Vol 0,016 m^3
Gross weight 3,5 Kg Net weight 2,1 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

1757

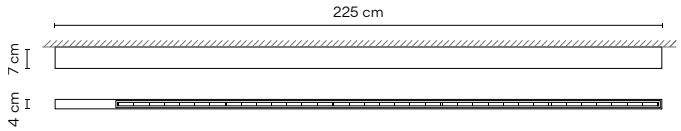

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm

E

Tunable White

/8 _ (2200 K - 4000 K)
3503,92 lm - 4791,2 lm

F

CRI >90

Control

1757 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Y**	ProtoPixel*
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Y**	Tunable White + ProtoPixel*
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,2 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m^3
Gross weight 6,0 Kg Net weight 3,5 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20

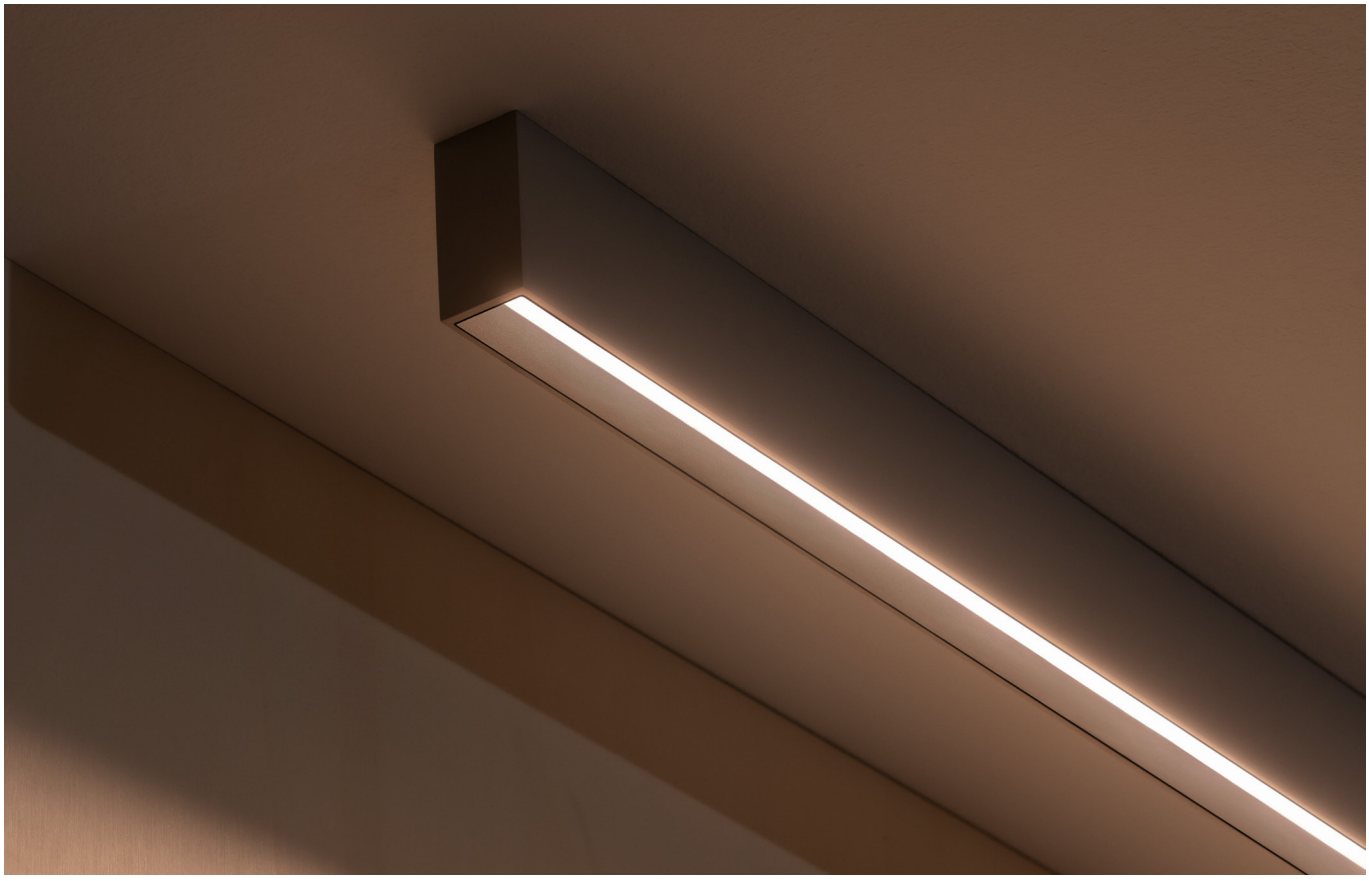

Ceiling Wall - Colour Mood Grazer




Right Left
1760 1762
7 x 125 x 5 cm



Right Left
1765 1767
7 x 225 x 5 cm

1760
Right



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/A _ Infinite Colour (TW + RGB)
1572 lm - 1940 lm
70 lm (RED)
182 lm (GREEN)
35 lm (BLUE)
E
CRI >90

Control
1760 _ _ **/** _ **Y** ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.


Light Source and electronics
1 x LED STRIP 17,2W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20

1762
Left

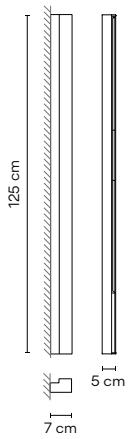

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/A _ Infinite Colour (TW + RGB)
1572 lm - 1940 lm
70 lm (RED)
182 lm (GREEN)
35 lm (BLUE)
E
CRI >90

Control
1762 _ _ **/** _ **Y** ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.


Light Source and electronics
1 x LED STRIP 17,2 W
Constant Voltage 24 VDC
110~240V 50/60Hz

Packaging
1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20

1765
Right

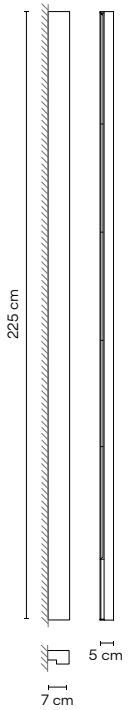

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/A _ Infinite Colour (TW + RGB)
3880 lm - 3144 lm
140 lm (RED)
364 lm (GREEN)
70 lm (BLUE)
E
CRI >90

Control
1765 _ _ **/** _ **Y** ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.


Light Source and electronics
1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
110~240V 50/60Hz

Packaging
1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 7,5 Kg Net weight 5,0 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20

1767
Left

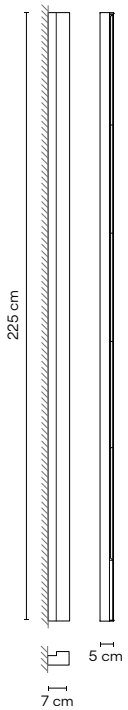

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/A _ Infinite Colour (TW + RGB)
3880 lm - 3144 lm
140 lm (RED)
364 lm (GREEN)
70 lm (BLUE)
E
CRI >90

Control
1767 _ _ **/** _ **Y** ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics
1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging
1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 7,5 Kg Net weight 5,0 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.


LED IP20

Wall - Up&Down Surface Grazer

1770
7 x 8 x 4 cm




1772
7 x 100 x 4 cm

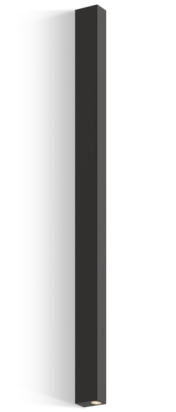

1774
7 x 160 x 4 cm



1770



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1770 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **5** Push (Remote)
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics


2 x LED 2,9 W 250 mA
Constant current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,095 x 0,09 m
Vol 0,0013 m^3
Gross weight 0,7 Kg Net weight 0,3 Kg

LED IP20

1772



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1772 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics


2 x LED 2,9 W 250 mA
Constant current 250 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,08 x 1,095 m
Vol 0,0091 m^3
Gross weight 2,6 Kg Net weight 1,5 Kg

LED IP20

1774



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1774 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,117 x 0,125 x 2 m
Vol 0,029 m^3
Gross weight 4,1 Kg Net weight 2,3 Kg

LED IP20







Floor

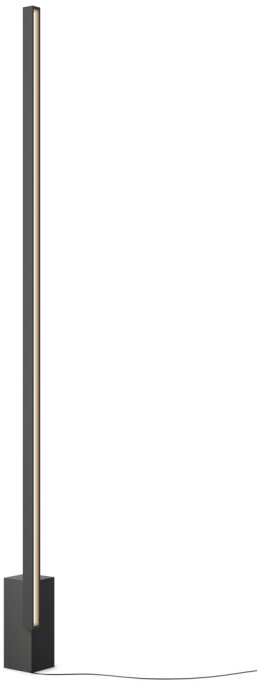

1780
14 x 128 cm

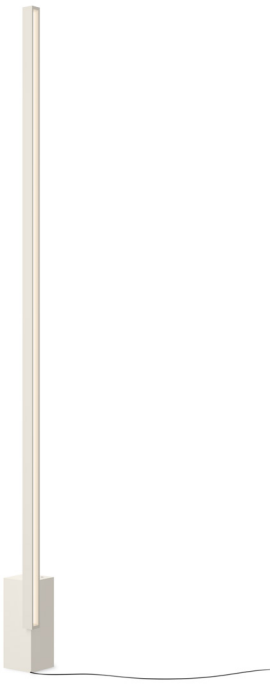


1780
14 x 128 cm

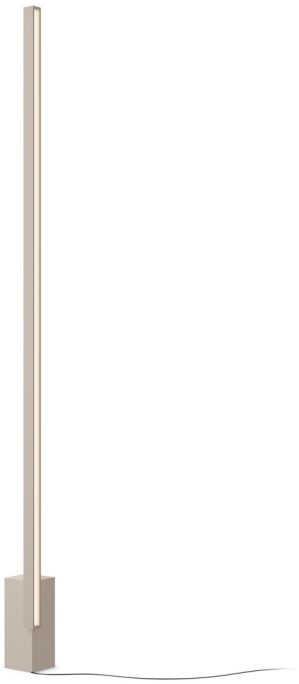

1780
14 x 128 cm

1780



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/A _ Infinite Colour (TW + RGB)
3880 lm - 3144 lm
140 lm (RED)
364 lm (GREEN)
70 lm (BLUE)

E

CRI >90

Control

1780 _ _ / _ **Y** ProtoPixel*
(also with push buttons)

Materials

Body: Aluminum.

Light Source and electronics

1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,60 x 0,68 x 2,2 m
Vol 0,9 m^3
Gross weight 7,0 Kg Net weight 4,3 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED IP20 Dimmer

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendant

Height 70 cm



Ø 37 cm


1800



Ø 54,5 cm


1815

Height 110 cm




Ø 37 cm

1805




Ø 54,5 cm

1820



Ø 82,5 cm

1830



Ø 124 cm


1840

Height 190 cm



Ø 37 cm

1810



Ø 54,5 cm

1825



Ø 82,5 cm

1835



Ø 124 cm

1845

Product specifications subject to change without notice. Please check vibia.com for updated information.

Height 70 cm



Ø 54,5 cm

1850

Height 110 cm



Ø 54,5 cm

1855



Ø 82,5 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 54,5 cm

1860



Ø 82,5 cm


1870



Ø 124 cm

1880

1800



Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2662 lm

D

CRI >90

Control

1800 _ _ / _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg

Notes

1800 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1805



Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2662 lm

D

CRI >90

Control

1805 _ _ / _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg

Notes

1805 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1810

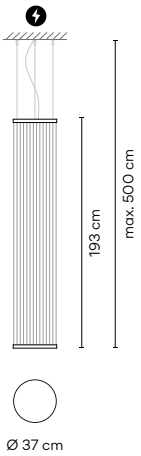

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 2662 lm
D
CRI >90

Control
1810 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,6 Kg Net weight 5,4 Kg

Notes
1810 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1815



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control
1815 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,4 Kg Net weight 6,2 Kg

Notes
1815 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1820

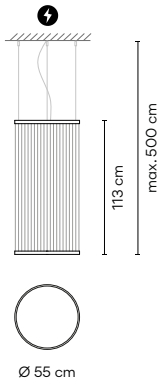

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm

D

CRI >90

Control

1820 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg

Notes

1820 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1825

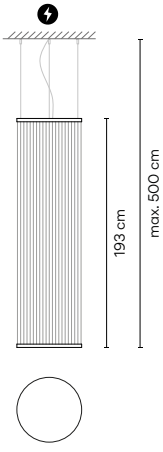

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm

D

CRI >90

Control

1825 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg


Notes

1825 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

1830

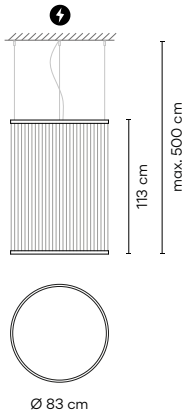

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control
1830 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 13,5 Kg Net weight 9,5 Kg

Notes
1830 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1835

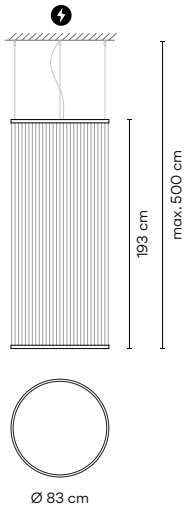

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control
1835 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 14,1 Kg Net weight 10,1 Kg

Notes
1835 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1840

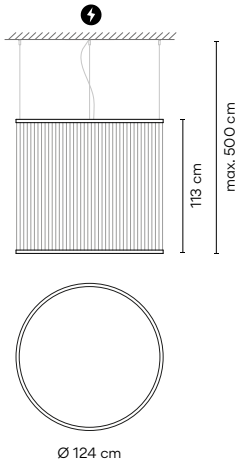

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 9196 lm

D

CRI >90

Control

1840 _ _ / _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

- **_10** Surface
- **_24** Built-in S
- **_31** Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19 Kg Net weight 13 Kg

Notes

1840 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1845

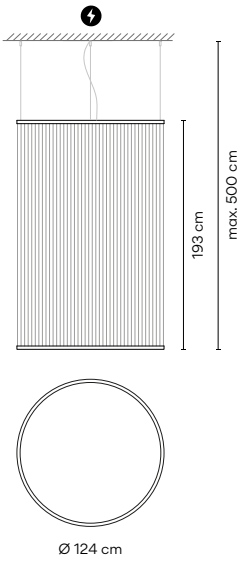

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 9196 lm

D

CRI >90

Control

1845 _ _ / _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

- **_10** Surface
- **_24** Built-in S
- **_31** Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg

Notes

1845 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1850



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control
1850 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 7,9 Kg Net weight 5,7 Kg

Notes
1850 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1855

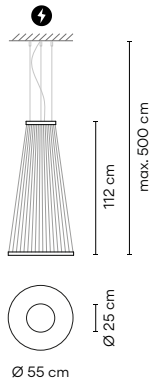

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control
1855 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,3 Kg Net weight 6,1 Kg

Notes
1855 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1860

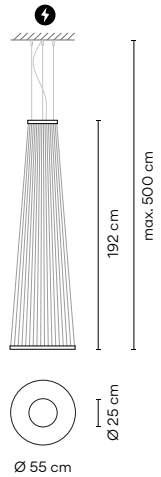

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm

D

CRI >90

Control

1860 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,7 Kg Net weight 6,5 Kg

Notes

1860 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1865

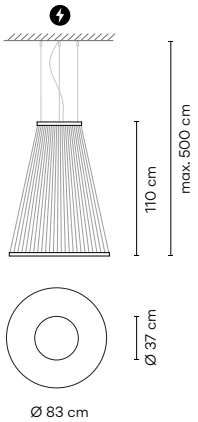

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 6050 lm

D

CRI >90

Control

1865 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg

Notes

1865 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1870

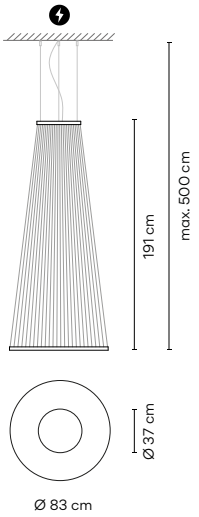

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control
1870 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
Black (NCS S 8500-N)

Select Eletrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 12,4 Kg Net weight 9,4 Kg

Notes
1870 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1875

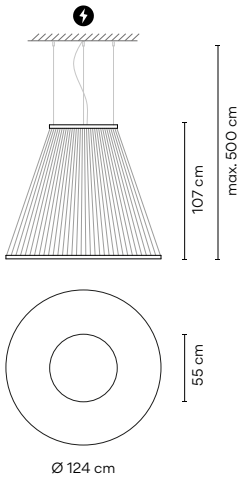

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90

Control
1875 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
Black (NCS S 8500-N)

Select Eletrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 15,9 Kg Net weight 11,9 Kg

Notes
1875 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendants

1880

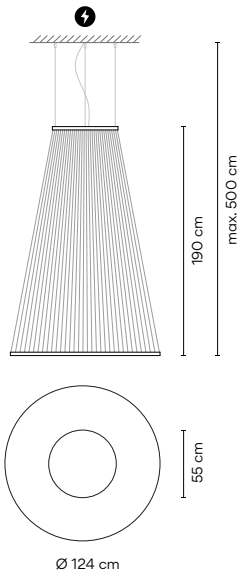

Finishes (threads)
- **24/ _ _** Beige M1 (NCS S 2005-Y50R)
- **37/ _ _** Terra Red (NCS S4040-Y70R)
- **47/ _ _** Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90

Control
1880 _ _ / _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 16,8 Kg Net weight 12,8 Kg

Notes
1880_ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

Select Eletrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_24
Built-in S



Ø 12 cm
height 6 cm

black finish.

Regular ceiling

_10
Surface




Ø 25,5 cm
height 4,5 cm

black finish.


Ø 37,5 cm
height 4,5 cm

black finish.

Remote



Built-in





Funnel

A gentle presence with a distinctly sculptural form, Funnel is a study in materiality, light and space.

Ceiling Wall

2012
Ø 22 cm




2013
Ø 35 cm



2014
Ø 50 cm




2012




Ø 22 cm


2013



Ø 35 cm

2012





Finishes

10/ _ _ White
(NCS S 0300-N)

36/ _ _ Soft Pink
(NCS S 1010-Y50R)

47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 631,7 lm
E
CRI >80

/2 _ 3000 K - 649 lm
E
CRI >80

/3 _ 3500 K - 655,4 lm
F
CRI >90

Control

2012 _ _ **/** _ **0** On/ Off

Finishes

51/ _ _ Gold leaf
(Gold leaf)

LED Colour Temperature

/1 _ 2700 K - 631,7 lm
E
CRI >80

/2 _ 3000 K - 649 lm
E
CRI >80

/3 _ 3500 K - 655,4 lm
F
CRI >90

Control

2012 51 / _ **0** On/ Off

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

1 x LED PLATE 6,3 W 350 mA
Constant Current 350 mA
100-240V 50/60Hz


Packaging


1 Box 0,27 x 0,27 x 0,16 m
Vol 0,0116 m^3
Gross weight 0,892 Kg Net weight 0,45 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2013





Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2580 lm
E
CRI >80

/2 _ 3000 K - 2580 lm
E
CRI >90

/3 _ 3500 K - 2580 lm
F
CRI >90

Control

2013 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Finishes

- **51/** _ _ Gold leaf (Gold leaf)

LED Colour Temperature

/1 _ 2700 K - 2580 lm
E
CRI >80

/2 _ 3000 K - 2580 lm
E
CRI >90

/3 _ 3500 K - 2580 lm
F
CRI >90

Control

2013 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics


6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m^3
Gross weight 2,53 Kg Net weight 2 Kg

LED IP20 Bi-volt

2014



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2580 lm
E
CRI >80

/2 _ 3000 K - 2580 lm
E
CRI >80

/3 _ 3500 K - 2580 lm
F
CRI >90

Control

2014 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m^3
Gross weight 3,782 Kg Net weight 3,3 Kg

LED IP20 Bi-volt


Rhythm Horizontal

Design by Arik Levy


Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant


Stick 47 cm




2110
45 x 47 cm



2111
93 x 47 cm




2112
141 x 47 cm




2113
189 x 47 cm


Stick 87 cm



2120
63 x 87 cm

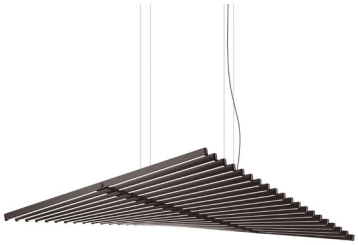

2121
131 x 87 cm

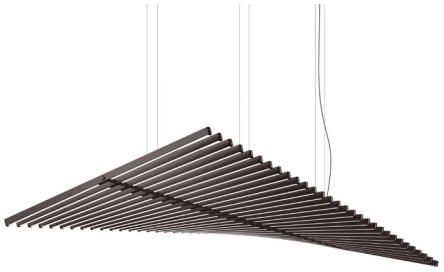


2122
199 x 87 cm



2155
49 x 87 cm


Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique.
Personalise your own
Rhythm composition
quick and easy.






2110



Finishes

14/ _ _ Chocolate
(RAL 8019)
58/ _ _ Off-White
(RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 4332 lm
/3 _ 3500 K - 4578 lm

D

CRI >90

Control

2110 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: PA- Polyamide.
Diffuser: PC- Polycarbonate.
Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0591 m^3
Gross weight 7,7 Kg Net weight 6 Kg

Notes

219114 Built-in accesory
(96 mm) chocolate

219158 Built-in accesory
(96 mm) off-white


Surface and built-in fitting.

Extra cable length.

LED IP20 Bi-volt

Ø 18,5 cm Only for built-in

2111



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm

D

CRI >90

Control

2111 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1570 m³
Gross weight 14,2 Kg Net weight 10,5 Kg

Notes

219114 Built-in accesory (96 mm) chocolate

219158 Built-in accesory (96 mm) off-white


Surface and built-in fitting.

Extra cable length.

LED IP20 Bi-volt

Ø 18,5 cm Only for built-in

2112



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 12996 lm
/3 _ 3500 K - 13736 lm

D

CRI >90

Control

2112 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0430 m³
Gross weight 10,3 Kg Net weight 7 Kg

Notes

219014 Built-in accesory (44,5 mm) chocolate **125,00 €**

219058 Built-in accesory (44,5 mm) off-white **125,00 €**


Surface and built-in fitting.

Extra cable length.

LED IP20 Bi-volt

Ø 18,5 cm Only for built-in

2113



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 17328 lm
/3 _ 3500 K - 18314 lm

D

CRI >90

Control

2113 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1900 m³
Gross weight 17,2 Kg Net weight 13,5 Kg

Notes

219014 Built-in accesory (44,5 mm) chocolate **125,00 €**

219058 Built-in accesory (44,5 mm) off-white **125,00 €**


Surface and built-in fitting.

Extra cable length.

LED IP20 Bi-volt

Ø 18,5 cm Only for built-in

2120



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 7602 lm
/3 _ 3500 K - 8035 lm
D
CRI >90

Control
2120 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.


Light Source and electronics
10 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1380 m³
Gross weight 9,5 Kg Net weight 7,3 Kg

Notes
219214 Built-in accesory (136 mm) chocolate
219258 Built-in accesory (136 mm) off-white
Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in

2121



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 15204 lm
/3 _ 3500 K - 16070 lm
D
CRI >90

Control
2121 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.


Light Source and electronics
20 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1664 m³
Gross weight 14,7 Kg Net weight 10,5 Kg

Notes
219014 Built-in accesory (44,5 mm) chocolate
219058 Built-in accesory (44,5 mm) off-white
Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in

2122



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 22807 lm
/3 _ 3500 K - 24105 lm
D
CRI >90

Control
2122 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
30 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,07120 m³
Gross weight 24 Kg Net weight 21,5 Kg

Notes
219014 Built-in accesory (44,5 mm) chocolate
219058 Built-in accesory (44,5 mm) off-white
Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

2155
Wood



Finishes
82/ _ _ White oak
83/ _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 5893 lm
/3 _ 3500 K - 6213 lm
D
CRI >90

Control
2155 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Wood. Spacers: Aluminum.
Diffuser: PC-Polycarbonate.
Canopy: Steel.

Light Source and electronics
8 x LED STRIP 5,8 W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1570 m³
Gross weight 8,5 Kg Net weight 6,3 Kg

Notes
219282 Built-in accesory (136 mm) Beige D1
219283 Built-in accesory (136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in



Product specifications subject to change without notice. Please check vibia.com for updated information.

Rhythm Vertical

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.


Pendant

Stick 47 cm


2141



2142

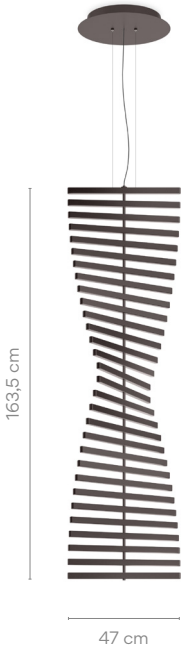

2143

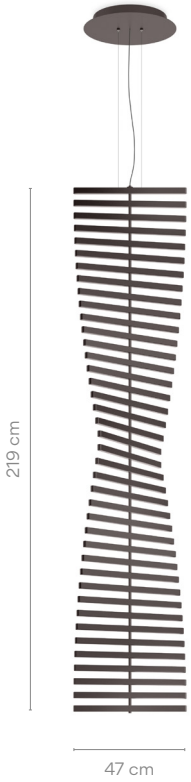

Stick 87 cm



2165


87 x 52,5 cm




2167

87 x 81 cm

Each project is unique. Personalise your own Rhythm composition quick and easy.

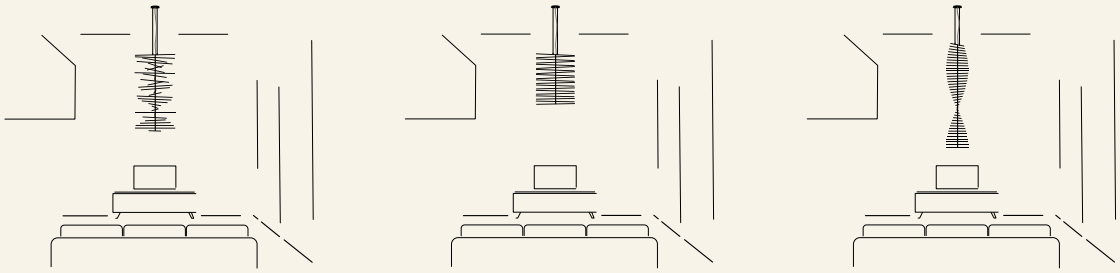

2141



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm

D

CRI >90

Control

2141 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5850 m³
Gross weight 10,3 Kg Net weight 7,4 Kg

Notes

219114 Built-in accesory (96 mm) chocolate

219158 Built-in accesory (96 mm) off-white


Surface and built-in fitting.

Extra cable length.

LED IP20 Bi-volt

Ø 18,5 cm Only for built-in

2142



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 12996 lm
/3 _ 3500 K - 13736 lm

D

CRI >90

Control

2142 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6239 m³
Gross weight 13,7 Kg Net weight 8,2 Kg

Notes

219114 Built-in accesory (96 mm) chocolate

219158 Built-in accesory (96 mm) off-white

Surface and built-in fitting.


Extra cable length.

LED IP20 Bi-volt

Ø 18,5 cm Only for built-in

Product specifications subject to change without notice. Please check vibia.com for updated information.

2143



Finishes
14/ _ _ Chocolate (RAL 8019)
58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm
D
CRI >90

Control
2143 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,6600 m³
Gross weight 16,9 Kg Net weight 13 Kg

Notes
219114 Built-in accesory (96 mm) chocolate
219158 Built-in accesory (96 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in

2165
Wood



Finishes
82/ _ _ White oak
83/ _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 5893 lm
/3 _ 3500 K - 6213 lm
D
CRI >90

Control
2165 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Stick: Wood. Spacers: Aluminum.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
8 x LED STRIP 5,8W 30V
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,1570 m³
Gross weight 8,5 Kg Net weight 6,3 Kg

Notes
219282 Built-in accesory (136 mm) Beige D1
219283 Built-in accesory (136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in

2167
Wood



Finishes
82/ _ _ White oak
83/ _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 11049 lm
/3 _ 3500 K - 11649 lm
D
CRI >90

Control
2167 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Stick: Wood. Spacers: Aluminum.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
15 x LED STRIP 5,8W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1570 m³
Gross weight 12,6 Kg Net weight 6,6 Kg

Notes
219282 Built-in accesory (136 mm) Beige D1
219283 Built-in accesory (136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED IP20 Bi-volt
Ø 18,5 cm Only for built-in

Guise

Design by Diez Office

Crafted of precision glass and embedded with a row of recessed LEDS, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

Wall

SURFACE



2260

Ø 54 cm

SURFACE



2262

Ø 92 cm

REMOTE




2263

Ø 92 cm

Infinite Colour

2260



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 445 lm
G
CRI >90

Control

2260 18 / 26 Sensor

Materials

Diffuser: Borosilicate.
LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 10 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,69 x 0,69 x 0,09 m
Vol 0,043 m³
Gross weight 7 Kg Net weight 4 Kg


Notes

Electric cable with plug 3 m

LED IP20 Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2262



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 897 lm
G
CRI >90

Control
2262 18 / 26 Sensor

Materials
Diffuser: Borosilicate.
LED support: Aluminum.


Light Source and electronics
1 x LED STRIP 24V 17,2 W.
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 1,04 x 1,04 x 0,10 m
Vol 0,104 m³
Gross weight 16,5 Kg Net weight 11,58 Kg

Notes
Electric cable with plug 3 m

LED IP20 Dimmer Bi-volt

2263



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/A Infinite Colour (TW + RGB)
778 lm - 939 lm
G
CRI >90

Control
2263 18 / AY_ 30
Protopixel* (Remote)
(also with push buttons)

Materials
Diffuser: Borosilicate. LED support: Aluminum.

Light Source and electronics
1 x LED STRIP 24V 17,2 W.
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 1,04 x 1,04 x 0,10 m
Vol 0,104 m³
Gross weight 16,5 Kg Net weight 11,58 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20 Dimmer Bi-volt





Pendant

2270




Ø 16 cm

2272



Ø 16 cm

2277

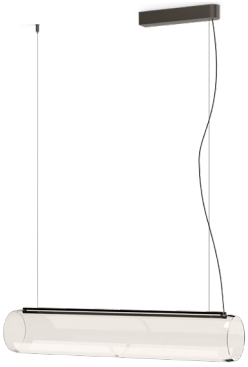


89 cm

2282




Ø 25 cm

2288

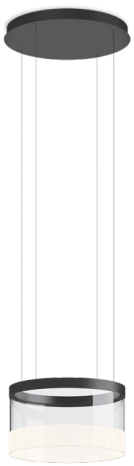

Ø 40 cm

2270



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 1097 lm
G

CRI >90

Control

2270 _ _ / _ _

_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2Z** Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,87 x 0,35 x 0,37 m
Vol 0,113 m³
Gross weight 6,5 Kg Net weight 5 Kg


Notes

Extra cable length.

LED IP20 Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2272



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 1097 lm
G
CRI >90

Control
2272 _ _ **/ 26** Sensor

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.


Light Source and electronics
1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,45 x 0,80 x 0,20 m
Vol 0,0072 m³
Gross weight 16,10 Kg Net weight 16,10 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

2277



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 1404 lm
G
CRI >90

Control
2277 _ _ **/** _ _
_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.


Light Source and electronics
1 x LED STRIP 24V 30 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 1,18 x 0,35 x 0,37 m
Vol 0,153 m³
Gross weight 9,5 Kg Net weight 7,5 Kg

Notes
Extra cable length.

LED | IP20 | Dimmer | Bi-volt

2282



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
G
CRI >90

Control
2282 _ _ **/** _ _
_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.


Light Source and electronics
1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,41 x 0,41 x 0,38 m
Vol 0,0639 m³
Gross weight 3,3 Kg Net weight 2,3 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

2288



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 868 lm
G
CRI >90

Control
2288 _ _ **/** _ _
_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 18 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m³
Gross weight 11,7 Kg Net weight 9,7 Kg

Notes
Extra cable length.

LED | IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Ceiling


2292

Ø 25 cm




2298

Ø 40 cm



2292



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
G
CRI >90

Control
2292 _ _ **/** _ _

_ _ **/ 21** DALI-2
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi


Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,41 x 0,41 x 0,33 m
Vol 0,0555 m³
Gross weight 3,2 Kg Net weight 2,2 Kg

LED IP20 Bi-volt

2298



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
G
CRI >90

Control
2298 _ _ **/** _ _

_ _ **/ 21** DALI-2
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 18 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging
1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m³
Gross weight 13,3 Kg Net weight 11,3 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Halo

Design by Martín Azúa

A seamless merging of light and matter, Halo lends the effect of light floating in the air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.


Pendant




2330
Ø 55,5 cm



2331
89 cm
2 Units

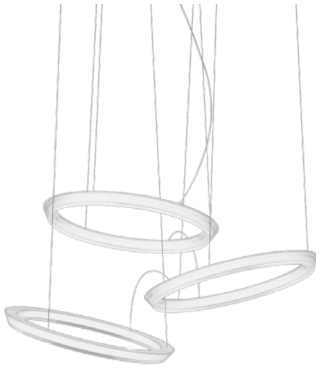

2332
127 cm
3 Units


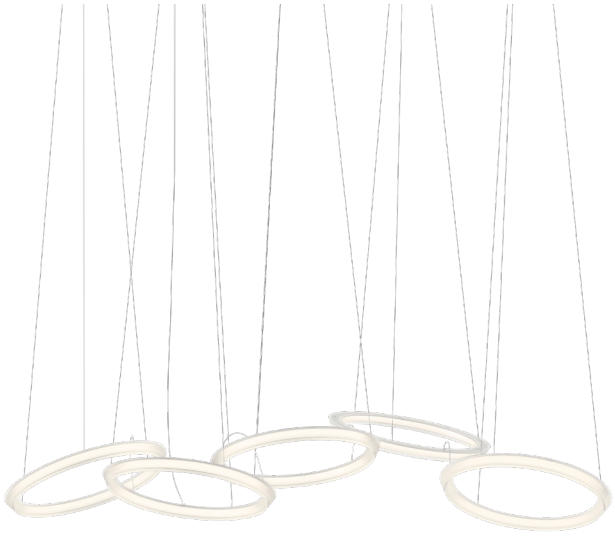


2333
197 cm
5 Units


Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique. Personalise your own Halo composition quick and easy.

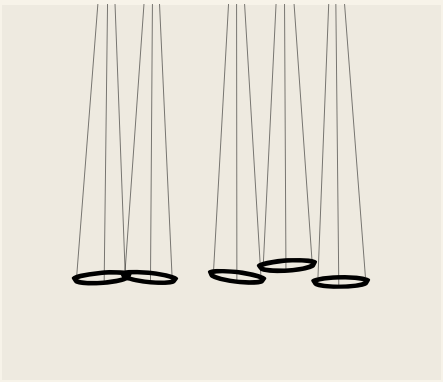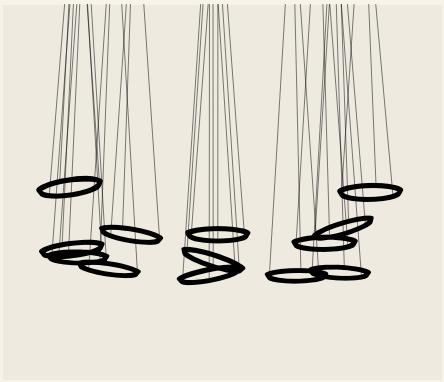

2330



Finishes

03/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1904 lm
CRI >90

/2 _ 3000 K - 1726 lm
CRI >80

D

Control

2330 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m^3
Gross weight 5,75 Kg Net weight 3,75 Kg


Notes

Extra cable length.

LED IP20 Multi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

2331



Finishes
03/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 3808 lm
CRI >90
/2 _ 3000 K - 3453 lm
CRI >80
D

Control
2331 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel


Light Source and electronics
2 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 10,25 Kg Net weight 6,25 Kg

Notes
Extra cable length.

LED IP20 Multi-volt

2332



Finishes
03/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 5712 lm
CRI >90
/2 _ 3000 K - 5180 lm
CRI >80
D

Control
2332 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.


Light Source and electronics
3 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 14,75 Kg Net weight 8,75 Kg

Notes
Extra cable length.

LED IP20 Multi-volt

2333



Finishes
03/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 9520 lm
CRI >90
/2 _ 3000 K - 8633 lm
CRI >80
D

Control
2333 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
5 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz


Packaging
2 Boxes
Total Vol 0,1106 m³
Gross weight 23,75 Kg Net weight 13,75 Kg

Notes
Extra cable length.


LED IP20 Multi-volt




Pendant




2340
152 cm
2 Units

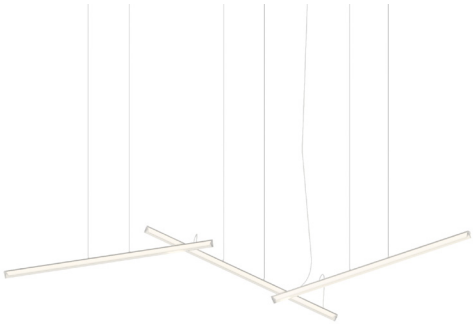

2341
204 cm
3 Units




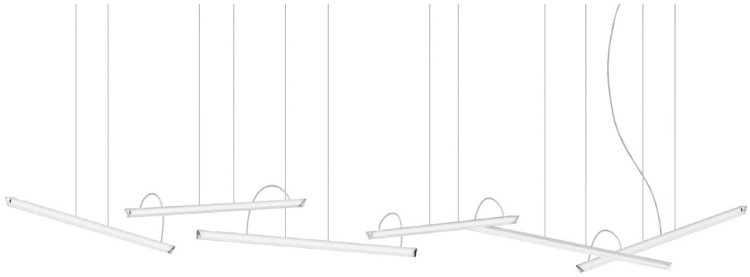


2342
336 cm
6 Units

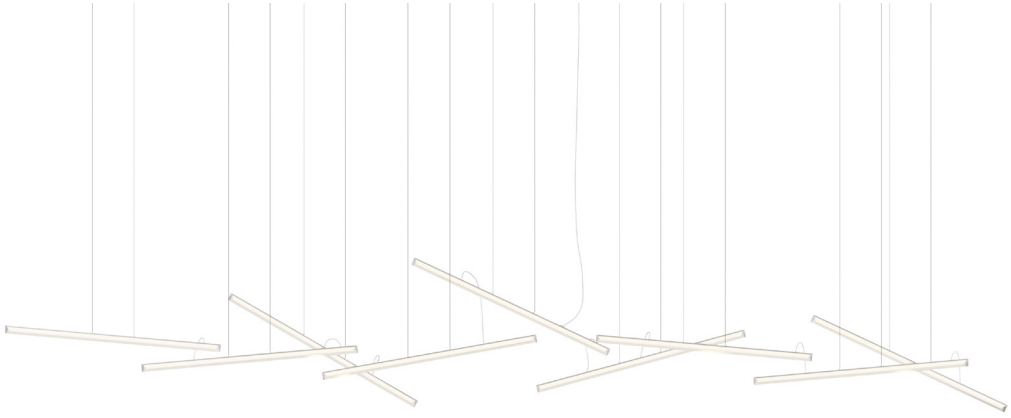


2343
500 cm
9 Units

Each project is unique. Personalise your own Halo composition quick and easy.

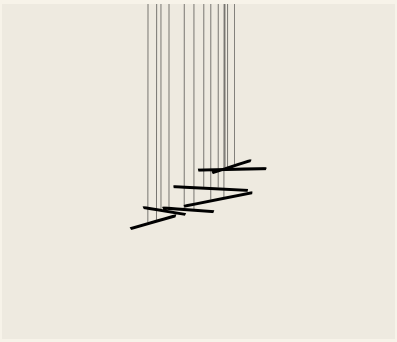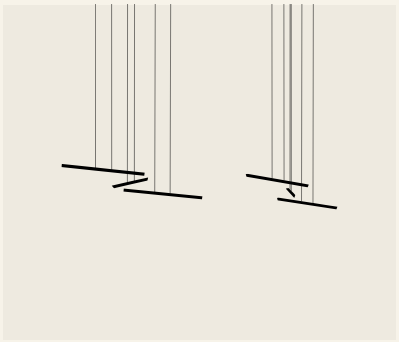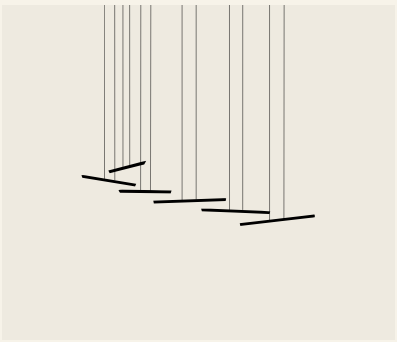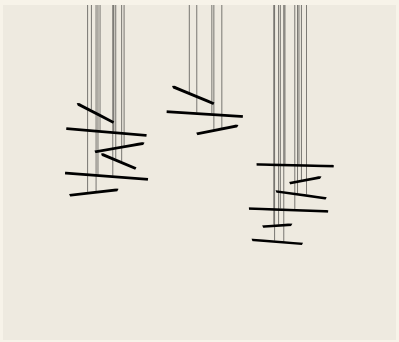2340



Finishes

03/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1904 lm
F

/2 _ 3000 K - 1726 lm
G

CRI >90

Control

2340 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

2 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0753 m³
Gross weight 6,2 Kg Net weight 5,58 Kg

Notes

Extra cable length.

LED IP20 Multi-volt

2341



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
F
/2 _ 3000 K - 3850 lm
G
CRI >90

Control
2341 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA.
Canopy: Steel.


Light Source and electronics
3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0753 m³
Gross weight 7,3 Kg Net weight 6,57 Kg

Notes
Extra cable length.

LED IP20 Multi-volt

2342



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 8492 lm
F
/2 _ 3000 K - 7701 lm
G
CRI >90

Control
2342 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA.
Canopy: Steel.


Light Source and electronics
6 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0756 m³
Gross weight 11,8 Kg Net weight 10,25 Kg

Notes
Extra cable length.

LED IP20 Multi-volt

2343



Finishes

03/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 12739 lm
F

/2 _ 3000 K - 11552 lm
G

CRI >90

Control

2343 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

9 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz


Packaging

2 Boxes
Total Vol 0,0756 m³
Gross weight 16,20 Kg Net weight 14,75 Kg

Notes

Extra cable length.

LED IP20 Multi-volt

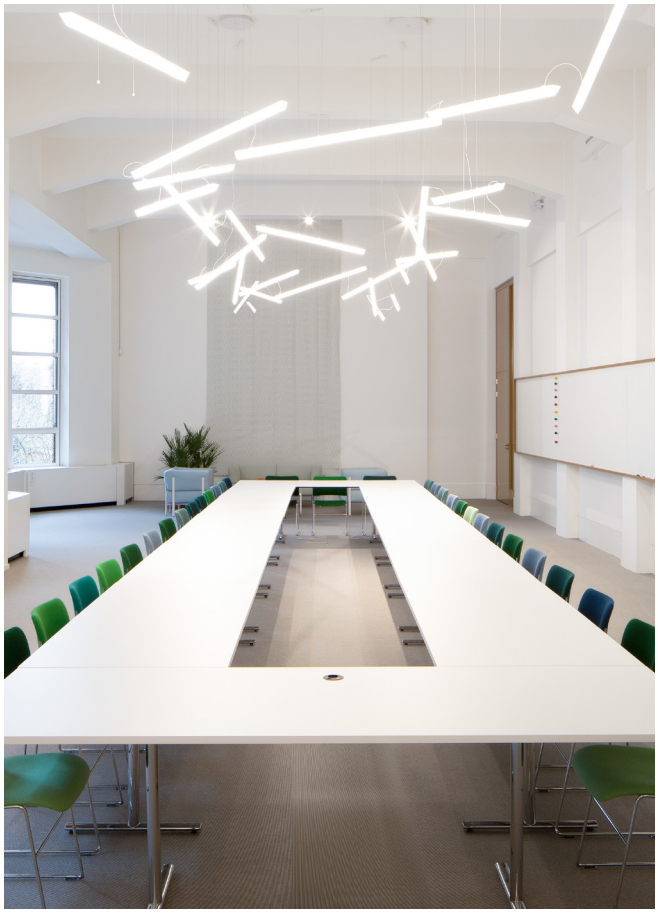



Select Eletrical connection

Choose your preferred installation option according to your needs.

For Ref. 2340, 2341

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

Regular ceiling

_10
Surface



Ø 30,5 cm

match with fixture finish.

For Ref. 2342, 2343

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

Regular ceiling


_10
Surface




Ø 35 cm

match with fixture finish.

Remote



Built-in




Wall



2360

102,5 x 5,7 cm

2360



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **13/** _ _ Off-White (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control

2360 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** _ **30** Casambi (Remote)

Materials

Diffuser: PMMA .
LED support: Aluminum.


Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,10 x 1,025 x 0,10 m
Vol 0,01 m³
Gross weight 2,25 Kg Net weight 1,75 Kg

LED IP20

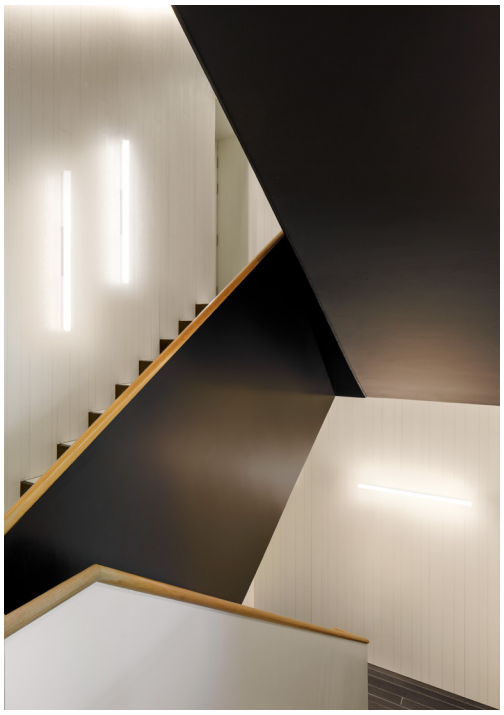



Halo Jewel

Design by Martín Azúa


Subtle light floating in the air and delicately
suspended by a perfectly crafted steel structure.
Light and matter in one.

Pendant

INDIVIDUAL MODELS


2350

Ø 56,3 cm



2351

Ø 56,3 cm



2355

Ø 16 x 350 cm



2356

Ø 27 x 350 cm




MULTIPLE MODELS



Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

2350

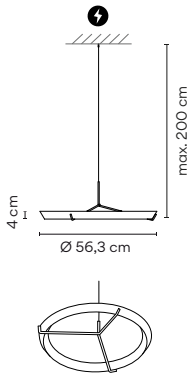

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90
/2 _ 3000 K - 2024 lm
F
CRI >80

Control
2350 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90

Control
2350 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.


Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes
Extra cable length.

LED | IP20 | Multi-volt

2351

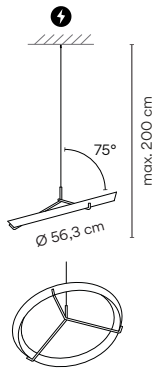

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90
/2 _ 3000 K - 2024 lm
F
CRI >80

Control
2351 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90

Control
2351 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz


Packaging
1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes
Extra cable length.

LED | IP20 | Multi-volt

1160 | 10 | /1 | A | _18
Model | Finish | LED Colour Temperature | Control | Electrical connection | Only for Pendant

2355



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control
2355 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control
2355 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.


Light Source and electronics
1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,19 x 1,265 m
Vol 0,0312 m³
Gross weight 5 Kg Net weight 4,1 Kg

Notes
Extra cable length.

LED | IP20 | Dimmer | Bi-volt

2356

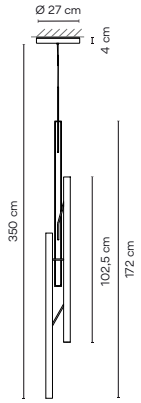

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
/2 _ 3000 K - 3672 lm
F
CRI >90

Control
2356 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
/2 _ 3000 K - 3672 lm
F
CRI >90

Control
2356 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,31 x 0,33 x 2 m
Vol 0,2046 m³
Gross weight 7,4 Kg Net weight 6,06 Kg

Notes
Extra cable length.

LED | IP20 | Dimmer | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Select your model at **vibia.com** and adjust



2 x 2355



2 x 2350



1 x 2351 2 x 2350



3 x 2351



3 x 2351



4 x 2350



5 x 2355



1 x 2351 3 x 2350



9 x 2355



17 x 2355



7 x 2355



25 x 2355

See more
multiple models
at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

11/ _ _ Black
(NCS S 8500-N)
20/ _ _ Gold
(Gold)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K

CRI >80
CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2350, 2351

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling


_10
Surface



Ø 27 cm


match with fixture finish.

_18
Free Wire




Ø 22 cm

you can choose the finish of the canopy among black or white.



Ø 36 cm



Ø 40 cm

For Ref. 2355

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling


_10
Surface



Ø 16 cm


match with fixture finish.

_18
Free Wire




Ø 20 cm

you can choose the finish of the canopy among black or white.




Ø 36 cm




Ø 40 cm

Remote



Built-in



Materials

Diffuser: PMMA . LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Notes

Extra cable length.


LED IP20 Dimmer Bi-volt

Cosmos

Design by Lievore, Altherr, Molina


Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

Pendant



Ø 19 cm

2500



Ø 27 cm

2501



Ø 48 cm

2502



55 cm

2510



65 cm

2511



76 cm


2515



86 cm

2516

2500



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **62/** _ _ Green (PANTONE 5645)
- **58/** _ _ Off-White (NCS S 2005-Y20R)

LED Colour Temperature

/1 _ 2700 K - 485 lm
CRI >90

/3 _ 3500 K - 128 lm
CRI >80

E

Control

2500 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100~240V 50/60Hz
/ 1B: 110~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0180 m^3
Gross weight 1,62 Kg Net weight 1,18 Kg


Notes

Extra cable length.

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2501



Finishes

14/ _ _ Chocolate
(RAL 8019)
62/ _ _ Green
(PANTONE 5645)
58/ _ _ Off-White
(NCS S 2005-Y20R)

LED Colour Temperature

/1 _ 2700 K - 485 lm
CRI >90
/3 _ 3500 K - 512 lm
CRI >80
E

Control

2501 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100~240V 50/60Hz
/ 1B: 110~240V 50/60Hz

Packaging


1 Box 0,42 x 0,42 x 0,25 m
Vol 0,0441 m³
Gross weight 2,54 Kg Net weight 1,44 Kg

Notes

Extra cable length.

LED IP20 Bi-volt

2502



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 485 lm
CRI >90
/3 _ 3500 K - 512 lm
CRI >80
E

Control

2502 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA.
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 5,58 Kg Net weight 3,15 Kg

Notes

Extra cable length.

LED IP20 Bi-volt

2510



Finishes

62/ _ _ Green,
White and
Chocolate
(PANTONE 5645,
NCS S 0300-N,
RAL 8019)

LED Colour Temperature

/1 _ 2700 K - 1455 lm
CRI >90
/3 _ 3500 K - 1537 lm
CRI >80
E

Control

2510 _ _ / _ _

_ _ / _ **A** Push;
1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 7,54 Kg Net weight 5,11 Kg


Notes

Compositions and finishes can
not be changed
Extra cable length.

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

2511



Finishes

62/ _ _ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019)

58/ _ _ Off-White, White and Chocolate (NCS S 2005-Y20R, NCS S 0300-N, RAL 801)

LED Colour Temperature

/1 _ 2700 K - 1455 lm
CRI >90

/3 _ 3500 K - 1537 lm
CRI >80

E

Control

2511 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2

_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 9,25 Kg Net weight 6,82 Kg


Notes

Compositions and finishes can not be changed

Extra cable length.

LED | IP20 | Bi-volt

2515



Finishes

62/ _ _ Green, Chocolate and Off-White (Pantone 5645, RAL 8019, NCS S 2005-Y20R)

LED Colour Temperature

/1 _ 2700 K - 1940 lm
CRI >90

/3 _ 3500 K - 2050 lm
CRI >80

E

Control

2515 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2

_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,76 x 0,76 x 0,27 m
Vol 0,1560 m³
Gross weight 10,94 Kg Net weight 7,04 Kg


Notes

Compositions and finishes can not be changed

Extra cable length.

LED | IP20 | Bi-volt

2516



Finishes

62/ _ _ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)

LED Colour Temperature

/1 _ 2700 K - 1940 lm
CRI >90

/3 _ 3500 K - 2050 lm
CRI >80

E

Control

2516 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2

_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

4 x LED 4,5 W 350 mA
2x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,73x0,73x0,32 m
Vol 0,1705 m³
Gross weight 14,62 Kg Net weight 15,5 Kg

Notes

Compositions and finishes can not be changed

Extra cable length.

LED | IP20 | Bi-volt



Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating scultptural pieces integrated in the architecture.

Wall

2600
16 x 16 cm



2602
26 x 22 cm



2610
120 x 18 x 10 cm



2612
240 x 30 x 10cm




2615
180 x 120 x 10 cm



2617
84 x 240 x 10 cm



2600



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 700 lm
F
/2 _ 3000 K - 756 lm
/3 _ 3500 K - 763 lm
E
CRI >90

Control

2600 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz


Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m^3
Gross weight 1,35 Kg Net weight 0,9 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2602



Finishes
15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1400 lm
F
/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E
CRI >90

Control
2602 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.


Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 2,85 Kg Net weight 1,9 Kg

Notes
* Electrical connection point.

LED IP20 Bi-volt

2610



Finishes
15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Control
2610 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.


Light Source and electronics
1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,036 m³
Gross weight 3,6 Kg Net weight 2,4 Kg

Notes
* Electrical connection point.

LED IP20 Bi-volt

2612



Finishes
15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1400 lm
F
/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E
CRI >90

Control
2612 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.


Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,042 m³
Gross weight 3,9 Kg Net weight 2,6 Kg

Notes
* Electrical connection point.

LED IP20 Bi-volt

2615



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1400 lm
F

/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E

CRI >90

Control

2615 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,038 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

* Electrical connection point.

LED IP20 Bi-volt

2617



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1400 lm
F

/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E

CRI >90

Control

2617 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,041 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

* Electrical connection point.

LED IP20 Bi-volt

Ceiling

2630
18 x 21 cm



2632
24 x 15cm



2634
48 x 13 cm




2640
120 x 21 cm




2642
160 x 15 cm




2645
120 x 21 cm

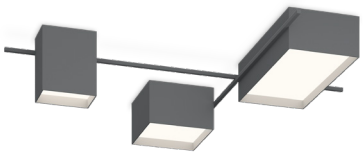

2647
160 x 21 cm

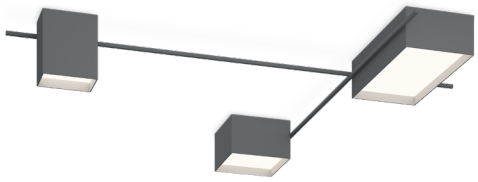

2630



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 998 lm
F

/2 _ 3000 K - 1078 lm
/3 _ 3500 K - 1087 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
820 lm - 1060 lm
G - F

CRI >90

Control

2630 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White +
DALI-2 DT8
_ _ / **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics


1 x LED PLATE 24V 9 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0, 4 x 0,4 x 0,2 m
Vol 0,032 m^3
Gross weight 3,75 Kg Net weight 2,5 Kg

LED IP20 Bi-volt

2632



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2049 lm
E
/2 _ 3000 K - 2214 lm
/3 _ 3500 K - 2233 lm
D

Tunable White
/8 _ (2200 K - 4000 K)
1699 lm - 2188 lm
F - E

CRI >90

Control

2632 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2
_ _ **/** _ **3** Static White + 1-10V
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics


1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,34 x 0,34 x 0,25 m
Vol 0,029 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

LED IP20 Bi-volt

2634



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 4098 lm
E
/2 _ 3000 K - 4428 lm
/3 _ 3500 K - 4466 lm
D

Tunable White
/8 _ (2200 K - 4000 K)
3398 lm - 4376 lm
F - E

CRI >90

Control

2634 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2
_ _ **/** _ **3** Static White + 1-10V
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics


1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,58 x 0,34 x 0,23 m
Vol 0,045 m³
Gross weight 5,85 Kg Net weight 3,9 Kg

LED IP20 Bi-volt

2640



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 3047 lm
/2 _ 3000 K - 3292 lm
/3 _ 3500 K - 3320 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2519 lm - 3248 lm
F - E

CRI >90

Control

2640 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2
_ _ **/** _ **3** Static White + 1-10V
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,15 m³
Gross weight 8,25 Kg Net weight 5,5 Kg

Notes

* Electrical connection point.

LED IP20 Bi-volt

2642



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 6147 lm
E
/2 _ 3000 K - 6642 lm
/3 _ 3500 K - 6699 lm
D
Tunable White
/8 _ (2200 K - 4000 K)
5097 lm - 6564 lm
F - E
CRI >90

Control

2642 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi
_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,25 x 0,60 x 1,7 m
Vol 0,255 m³
Gross weight 11,25 Kg Net weight 7,5 Kg

Notes

* Electrical connection point.

LED IP20 Bi-volt

2645



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 7145 lm
E
/2 _ 3000 K - 7720 lm
/3 _ 3500 K - 7786 lm
D
Tunable White
/8 _ (2200 K - 4000 K)
5917 lm - 7624 lm
F - E
CRI >90

Control

2645 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi
_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,25 x 1,2 x 1,2 m
Vol 0,42 m³
Gross weight 14,25 Kg Net weight 9,25 Kg

Notes

* Electrical connection point.

LED IP20 Bi-volt

2647



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 7145 lm
E
/2 _ 3000 K - 7720 lm
/3 _ 3500 K - 7786 lm
D
Tunable White
/8 _ (2200 K - 4000 K)
5917 lm - 7624 lm
F - E
CRI >90

Control

2647 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi
_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 1,7 x 1,7 m
Vol 0,72 m³
Gross weight 15,3 Kg Net weight 10,2 Kg

Notes

* Electrical connection point.

LED IP20 Bi-volt

Class

Design by Sebastian Herkner

A timeless and elegant solution for outdoor environments, Class combines the refined aesthetic of a patio light with the functional performance of a bollard. Consisting of a durable aluminum shaft and fluted glass diffuser, it washes the space with a gentle luminescence.

Outdoor



2810
28 x 250 cm



2815
28 x 250 cm



2800
22 x 78,5 cm



2805
22 x 78,5 cm




2820
18 x 60 cm



2825
18 x 96 cm

2800



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1188 lm
G
CRI >90

Control
2800 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)


Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 11,6 Kg Net weight 9,6 Kg

LED IP65

2805



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2376 lm
G
CRI >90

Control
2805 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.


Light Source and electronics
2 x LED 3,5W 150 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 14,8 Kg Net weight 12,8 Kg

LED IP65

Product specifications subject to change without notice. Please check vibia.com for updated information.

2810



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2376 lm
G
CRI >90

Control
2810 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)


Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 7W 300 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 2,92 x 0,32 x 0,32 m
Box 2: 0,37 x 0,32 x 0,22 m
Total Vol 0,33 m³
Gross weight 20,5 Kg Net weight 17,5 Kg

LED IP65 Dimmer

2815



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4752 lm
G
CRI >90

Control
2815 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)


Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
2 x LED 7W 300 mA
Constant Current 600 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 2,92 x 0,32 x 0,32 m
Box 2: 0,37 x 0,32 x 0,22 m
Total Vol 0,33 m³
Gross weight 28,4 Kg Net weight 25,4 Kg

LED IP65

2820



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1188 lm
G
CRI >90

Control
2820 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)


Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging
1 Box 0,95 x 0,40 x 0,20 m
Vol 0,08 m³
Gross weight 4,4 Kg Net weight 2,9 Kg

LED IP65

2825



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2376 lm
G
CRI >90

Control
2825 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 7W 300 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
1 Box 0,95 x 0,30 x 0,30 m
Vol 0,09 m³
Gross weight 6,4 Kg Net weight 4,40 Kg

LED IP65

Dama


Design by Ludovica+Roberto Palomba

Dama is a homage to the classic lamp, ideal for shaping an intimate atmosphere with an elevated aesthetic. Combining technical quality with a layer of warmth and intimacy, the collection connects the charm of tradition with the finesse of contemporary lighting design.

Table Floor Pendant




3225
63,5 x 61 cm

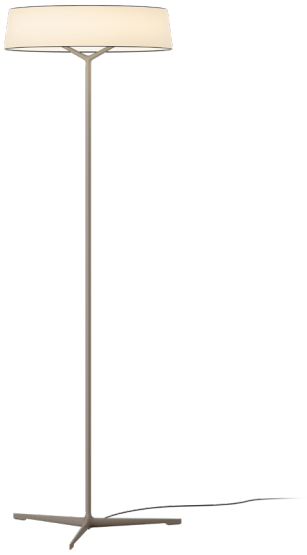


3230
Ø 49,5 x 140 cm

3235

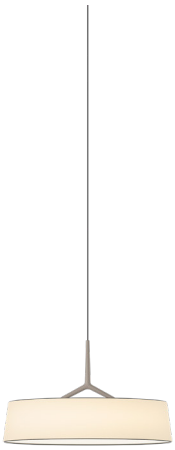

Ø 45 cm

3225



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

3225 _ _ **/** _ _

- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi
- _ _ **/ 1Y** ProtoPixel*

Materials

Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,75 x 0,55 x 0,55 m
Vol 0,23 m^3
Gross weight 3,3 Kg Net weight 1,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

Switch on the cable. Electric cable 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

3230

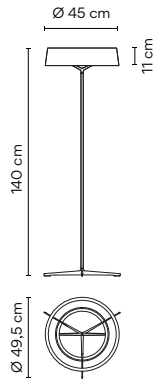

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2170 lm
E
CRI >90

Control
3230 _ _ / _ _
- _ _ / **15** Push
- _ _ / **1Z** Casambi
- _ _ / **1Y** ProtoPixel*

Materials
Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.


Light Source and electronics
1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging
1 Box 1,6 x 0,55 x 0,55 m
Vol 0,48 m³
Gross weight 5 Kg Net weight 2,55 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Switch on the cable. Electric cable 2,5 m.

LED IP20 Bi-volt

3235



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2170 lm
E
CRI >90

Control
3235 _ _ / _ _
- _ _ / **11** DALI-2
- _ _ / **1B** Push; 1-10V
- _ _ / **1Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials
Body: Aluminum.
Shade: Paper.

Light Source and electronics
1 x LED STRIP 16,7 W 900 mA
Constant Current 900 mA
110~240V. 50/60Hz

Packaging
1 Box 0,40 x 0,55 x 0,55 m
Vol 0,12 m³
Gross weight 3,2 Kg Net weight 1,6 Kg

Notes
Extra cable length.

LED IP20 Bi-volt





Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 3235

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 17,3 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm


Ø 22 cm

Ø 36 cm


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in








Circle

Combining accent, diffuse and general lighting effects with dynamic control and temperature regulation, Circle is a highly-functional complementary product designed to curate a nuanced ambience.

Ceiling - Accent Downlight - Colour



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless


3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide



Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

Ceiling - Accent Downlight - Wood



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide




Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

Product specifications subject to change without notice. Please check vibia.com for updated information.

3300
TRIM Narrow
3303
TRIM Medium
3306
TRIM Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3300 _ _ / _ _
3303 _ _ / _ _
3306 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ /**F1** Dim-To-Warm + DALI-2
- _ _ /**FB** Dim-To-Warm + Push; 1-10V
- _ _ /**FM** Dim-To-Warm + Without driver
- _ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3300 _ _ / _ _
3303 _ _ / _ _
3306 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ /**F1** Dim-To-Warm + DALI-2
- _ _ /**FB** Dim-To-Warm + Push; 1-10V
- _ _ /**FM** Dim-To-Warm + Without driver
- _ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,15 x 0,15 x 0,15 m
Vol 0,003 m³
Gross weight 0,5 Kg Net weight 0,33 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ↕ IP20 ↧ IP40 CE UK CA EAC


Ø 6 cm

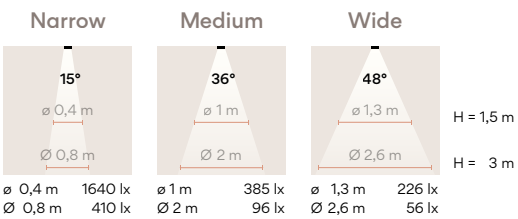

ø 0,4 m	1640 lx	ø 1 m	385 lx
Ø 0,8 m	410 lx	Ø 2 m	96 lx

ø 1,3 m	226 lx	
Ø 2,6 m	56 lx	

3310
TRIMLESS Narrow
3313
TRIMLESS Medium
3316
TRIMLESS Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3310 _ _ / _ _
3313 _ _ / _ _
3316 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ /**F1** Dim-To-Warm + DALI-2
- _ _ /**FB** Dim-To-Warm + Push; 1-10V
- _ _ /**FM** Dim-To-Warm + Without driver
- _ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3310 _ _ / _ _
3313 _ _ / _ _
3316 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ /**F1** Dim-To-Warm + DALI-2
- _ _ /**FB** Dim-To-Warm + Push; 1-10V
- _ _ /**FM** Dim-To-Warm + Without driver
- _ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,002 m^3
Gross weight 0,6 Kg Net weight 0,43 Kg


Notes

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 IP40

Ø 7 cm

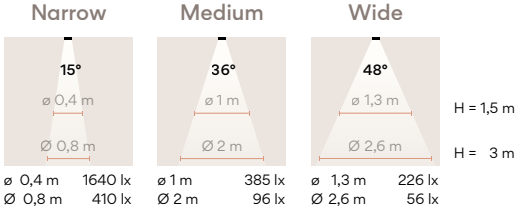


ø 0,4 m	1640 lx	ø 1 m	385 lx
Ø 0,8 m	410 lx	Ø 2 m	96 lx

ø 1,3 m	226 lx
Ø 2,6 m	56 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3320
TRIM Narrow
3323
TRIM Medium
3326
TRIM Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3320 _ _ / _ _
3323 _ _ / _ _
3326 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3320 _ _ / _ _
3323 _ _ / _ _
3326 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,003 m^3
Gross weight 0,6 Kg Net weight 0,4 Kg


Notes

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.


LED ↕ IP20 ↧ IP40 CE UK CA EAC

Ø 10 cm

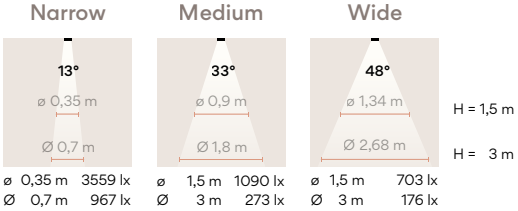

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3330
TRIMLESS Narrow
3333
TRIMLESS Medium
3336
TRIMLESS Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3330 _ _ / _ _
3333 _ _ / _ _
3336 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3330 _ _ / _ _
3333 _ _ / _ _
3336 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,002 m^3
Gross weight 0,75 Kg Net weight 0,55 Kg


Notes

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED | IP20 / IP40

Ø 11 cm

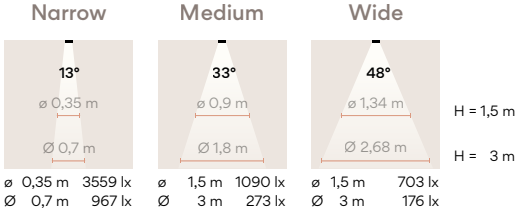


ø	0,35 m	3559 lx	ø	1,5 m	1090 lx
Ø	0,7 m	967 lx	Ø	3 m	273 lx

ø	1,5 m	703 lx
Ø	3 m	176 lx


Design Does

Ceiling - Wall Washer



Ø 11 cm


3350




Ø 10 cm

3353

3350
TRIM





Ø 11 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 914 lm
/2 _ 3000 K - 956 lm
/3 _ 3500 K - 990 lm
E

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm
F

CRI >90

Control

3350 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **D** Static White + Push, DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

- _ _ **/F1** Dim-To-Warm + DALI-2
- _ _ **/FB** Dim-To-Warm + Push; 1-10V
- _ _ **/FM** Dim-To-Warm + Without driver
- _ _ **/FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,4 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,15 x 0,15 x 0,1 m
Vol 0,002 m^3
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 IP40


Ø 10 cm

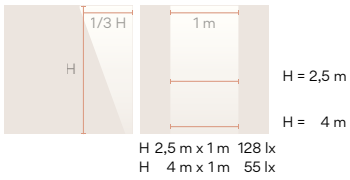

H 2,5 m x 1 m 128 lx
H 4 m x 1 m 55 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3353
TRIMLESS



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 914 lm
/2 _ 3000 K - 956 lm
/3 _ 3500 K - 990 lm
E

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm
F

CRI >90

Control

3353 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **D** Static White + Push, DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

- _ _ **/F1** Dim-To-Warm + DALI-2
- _ _ **/FB** Dim-To-Warm + Push; 1-10V
- _ _ **/FM** Dim-To-Warm + Without driver
- _ _ **/FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m³
Gross weight 0,6 Kg Net weight 0,4 Kg


Notes

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 IP40


Ø 11 cm



H 2,5 m x 1 m 128 lx
H 4 m x 1 m 55 lx



Ceiling - Flat Diffuser



Ø 36 cm


3360



Ø 47 cm

3363

3360



Ø 36 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1800 lm
/2 _ 3000 K - 1890 lm
F
/3 _ 3500 K - 1926 lm
E

Tunable White
/8 _ (2200 K - 4000 K) 1607 lm - 2186 lm
E

CRI >90

Control

3360 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum. Diffuser:PMMA.
Shade: PC-Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 17,4 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED PLATE 17,1 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,48 x 0,48 x 0,12 m
Vol 0,03 m³
Gross weight 2,4 Kg Net weight 2 Kg


Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20 CE UK CA EAC

Ø 35 cm

3363



Ø 47 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2798 lm
F
/2 _ 3000 K - 2938 lm
/3 _ 3500 K - 2994 lm
E

Tunable White
/8 _ (2200 K - 4000 K) 2471 lm - 3198 lm
E

CRI >90

Control

3363 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum. Diffuser:PMMA.
Shade: PC-Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 25,6 W 550 mA
Constant Current 550 mA
220~240V 50/60Hz

Tunable White:
1 x LED PLATE 25,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Packaging

1 Box 0,68 x 0,68 x 0,12 m
Vol 0,055 m³
Gross weight 3,4 Kg Net weight 2,9 Kg

Notes

3363 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20 CE UK CA EAC

Ø 46 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.



Line

Line consists of a series of simple linear luminaires, each with a distinct lighting effect. Integrating dynamic control and subtle gradients in intensity, tone and colour, the collection complements Vibia's wider product range to curate a subtle atmosphere.

Ceiling - High Comfort Diffuser



3500 Trim

14 x 4 cm



3503 Trimless

13 x 3 cm



3505 Trim

27 x 4 cm



3508 Trimless

26 x 3 cm



3510 Trim

53 x 4 cm



3513 Trimless

51 x 3 cm



3515 Trim

104 x 4 cm




3518 Trimless

102 x 3 cm

TRIM




TRIMLESS



Product specifications subject to change without notice. Please check vibia.com for updated information.

3500
TRIM
UGR <21



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
642 lm - 701 lm
F

CRI >90

Control

3500 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 0,5 Kg Net weight 0,35 Kg

Notes


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

13,5 x 3,5 cm

3503
TRIMLESS
UGR <21



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
642 lm - 701 lm
F

CRI >90

Control

3503 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Vol 0,006 m^3
Gross weigth 0,825kg Net weight 0,525 kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, remote driver only required.


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

14,5 x 4 cm

3505
TRIM
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
1221 lm - 1343 lm
F

CRI >90

Control

3505 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 0,65 Kg Net weight 0,45 Kg

Notes


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

26,2 x 3,5 cm

3508
TRIMLESS
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
1221 lm - 1343 lm
F

CRI >90

Control

3508 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m^3
Gross weight 1,05 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance under request.


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

27 x 4 cm

3510
TRIM
UGR <21

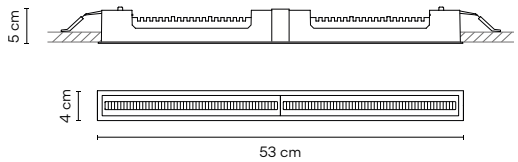

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2442 lm - 2686 lm
F

CRI >90

Control

3510 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,570 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

3510 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

52 x 3,5 cm

3513
TRIMLESS
UGR <21

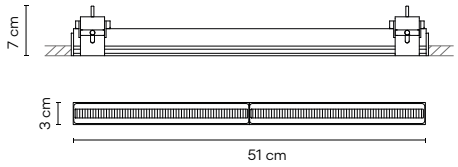

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2442 lm - 2686 lm
F

CRI >90

Control

3513 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m^3
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3513 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.


Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

53 x 4 cm

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3515
TRIM
UGR <21

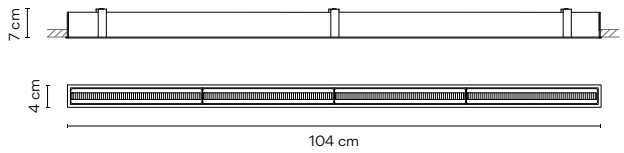

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
4884 lm - 5372 lm
F

CRI >90

Control
3515 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials
Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.


Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz
Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m^3
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes
3515 _ _ / _ 0: On/ Off Bi-volt
3515 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UKCA EAC
103 x 3,5 cm

3518
TRIMLESS
UGR <21

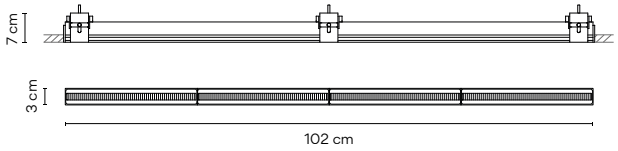

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm
E EPREL

Tunable White
/8 _ (2200 K - 4000 K)
4884 lm - 5372 lm
F EPREL

CRI >90

Control
3518 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials
Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz
Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,018 m^3
Gross weight 3,35 kg Net weight 2,46 Kg

Notes
3518 _ _ / _ 0: On/ Off Bi-volt
3518 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UKCA EAC
104 x 4 cm



Ceiling - Flat Diffuser



3530 Trim
53 x 4 cm

3533 Trimless
51 x 3 cm



3535 Trim
103 x 4 cm



3538 Trimless
102 x 3 cm




3540 Trim
203 x 4 cm




3543 Trimless
202 x 3 cm

TRIM




TRIMLESS



 Product specifications subject to change without notice. Please check vibia.com for updated information.

3530
TRIM

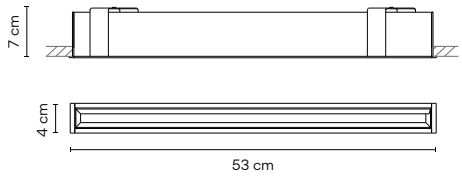

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1272 lm
/2 _ 3000 K - 1314 lm
/3 _ 3500 K - 1356 lm

Tunable White
/8 _ (2200 K - 4000 K)
875 lm - 1197 lm

E

CRI >90

Control

3530 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,570 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

52 x 3,5 cm

3533
TRIMLESS

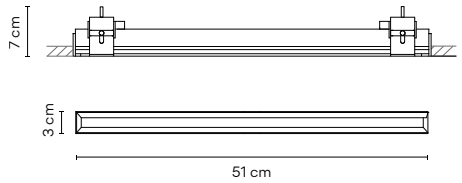

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1272 lm
/2 _ 3000 K - 1314 lm
/3 _ 3500 K - 1356 lm

Tunable White
/8 _ (2200 K - 4000 K)
875 lm - 1197 lm

E

CRI >90

Control

3533 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m^3
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes


For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

53 x 4 cm

3535
TRIM

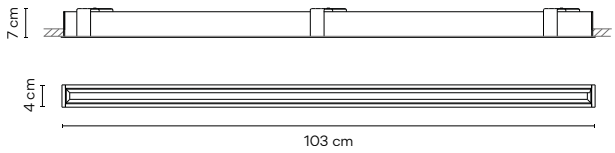

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm

Tunable White
/8 _ (2200 K - 4000 K) 1751 lm - 2395 lm

E

CRI >90

Control

3535 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m³
Gross weight 3,25 Kg Net weight 2,36 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UK CA EAC

102 x 3,5 cm

3538
TRIMLESS

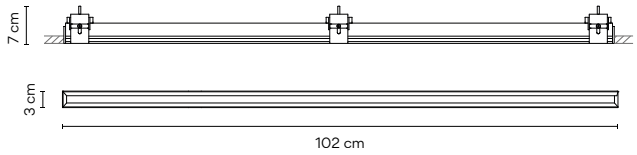

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm

Tunable White
/8 _ (2200 K - 4000 K) 1751 lm - 2395 lm

E

CRI >90

Control

3538 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Vol 0,018 m³
Gross weight 3,35 Kg Net weight 2,46 Kg


Notes

Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UK CA EAC

103 x 4 cm

3540
TRIM

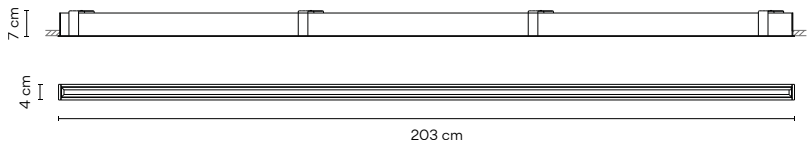

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm

Tunable White
/8 _ (2200 K - 4000 K) 3503 lm - 4791 lm

E

CRI >90

Control

3540 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 41,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 2,25 m
Vol 0,035 m^3
Gross weight 7,25 Kg Net weight 5,16 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

LED ☐ IP20 CE UK CA EAC

202 x 3,5 cm

3543
TRIMLESS

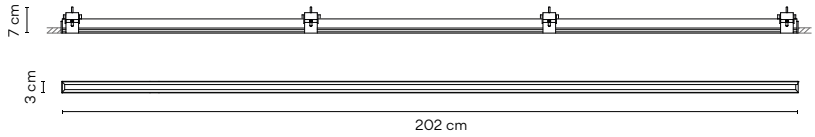

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm

Tunable White
/8 _ (2200 K - 4000 K) 3503 lm - 4791 lm

E

CRI >90

Control

3543 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 41,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,07 m^3
Gross weight 7,85 Kg Net weight 5,66 Kg

Notes

Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

LED ☐ IP20 CE UK CA EAC

203 x 4 cm

Ceiling - High Efficiency Low Glare



3550 Trim
14 x 4 cm



3553 Trimless
13 x 3 cm



3555 Trim
27 x 4 cm



3558 Trimless
26 x 3 cm



3560 Trim
53 x 4 cm



3563 Trimless
51 x 3 cm



3565 Trim
104 x 4 cm




3568 Trimless
102 x 3 cm


TRIM




TRIMLESS



3550
TRIM
UGR <18





Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm

Tunable White
/8 _ (2200 K - 4000 K)
664 lm - 898 lm

E

CRI >90

Control

3550 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 0,5 Kg Net weight 0,35 Kg


Notes

For Tunable White versions,
a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20

13,5 x 3,5 cm



d 1,3 m x D 1,4 m 232 lx
d 2,7 m x D 2,9 m 58 lx

3553
TRIMLESS
UGR <18



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm

Tunable White
/8 _ (2200 K - 4000 K)
664 lm - 898 lm

E

CRI >90

Control

3553 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m³
Gross weight 0,825 Kg Net weight 0,525 Kg

Notes

Trimless frame can be shipped in advance under request.


For Tunable White versions, remote driver only required.

For tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC


14,5 x 4 cm



d 1,3 m x D 1,4 m 232 lx
d 2,7 m x D 2,9 m 58 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3555
TRIM
UGR <18



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

Tunable White
/8 _ (2200 K - 4000 K)
1262 lm - 1707 lm

E

CRI >90

Control

3555 _ _ / _ _

_ _ / _ 0 Static White + On/ Off
_ _ / _ D Static White + Push, DALI-2
_ _ / _ M Static White + Without driver
_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8
_ _ / 8M Tunable White + Without driver
_ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 0,55 Kg Net weight 0,45 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.


LED | IP20 | CE | UK CA | EAC

26,2 x 3,5 cm



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

3558
TRIMLESS
UGR <18



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

Tunable White
/8 _ (2200 K - 4000 K)
1262 lm - 1707 lm

E

CRI >90

Control

3558 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m^3
Gross weight 1,05 Kg Net weight 0,75 Kg

Notes


Trimless frame can be shipped in advance under request.

For tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20

27 x 4 cm



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

3560
TRIM
UGR <18

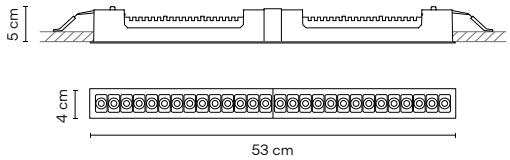

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

Tunable White
/8 _ (2200 K - 4000 K)
2524 lm - 3414 lm

E

CRI >90

Control

3560 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **A** Static White + Push; 1-10V; DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 0,325 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

3560 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
3560 _ _ / _ Z: Casambi Bi-volt
For Tunable White versions, a grouping driver is recommended.
Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20

52 x 3,5 cm



d 1,4 m x D 1,5 m 836 lx
d 2,8 m x D 3 m 209 lx

3563
TRIMLESS
UGR <18

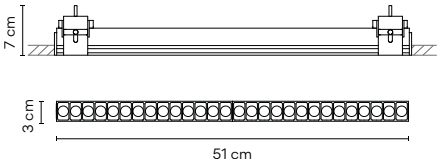

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

Tunable White
/8 _ (2200 K - 4000 K)
2524 lm - 3414 lm

E

CRI >90

Control

3563 _ _ **/** _ _

_ _ **/** _ **0** Static White +
On/ Off

_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2

_ _ **/** _ **M** Static White +
Without driver

_ _ **/** _ **Z** Static White +
Casambi

_ _ **/ 81** Tunable White +
DALI-2 DT8

_ _ **/ 8M** Tunable White +
Without driver

_ _ **/ 8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3563 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
3563 _ _ / _ Z: Casambi Bi-volt


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20


53 x 4 cm



d 1,4 m x D 1,5 m 836 lx
d 2,8 m x D 3 m 209 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3565
TRIM
UGR <18

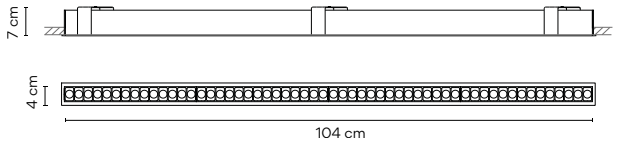

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm

Tunable White
/8 _ (2200 K - 4000 K)
5048 lm - 6828 lm

E

CRI >90

Control

3565 _ _ **/** _ _

_ _ / _ **0**	Static White + On/ Off
_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **M**	Static White + Without driver
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8M**	Tunable White + Without driver
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m^3
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

3565 _ _ / _ 0: Static White + On/ Off Bi-volt
3565 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
3565 _ _ / _ Z: Casambi Bi-volt
For Tunable White versions, a grouping driver is recommended.


LED IP20 CE UK CA EAC

102 x 3,5 cm



d 1,4 m x D 1,5 m 1581 lx
d 2,8 m x D 3 m 395 lx

3568
TRIMLESS
UGR <18

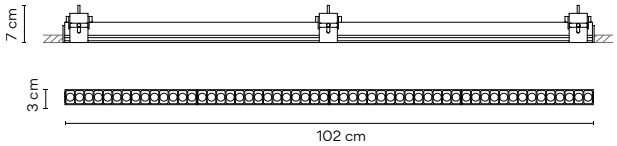

Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm

Tunable White
/8 _ (2200 K - 4000 K)
5048 lm - 6828 lm

E

CRI >90

Control
3568 _ _ **/** _ _

_ _ **/** _ **0** Static White +
On/ Off

_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2

_ _ **/** _ **M** Static White +
Without driver

_ _ **/** _ **Z** Static White +
Casambi

_ _ **/ 81** Tunable White +
DALI-2 DT8

_ _ **/ 8M** Tunable White +
Without driver

_ _ **/ 8Z** Tunable White +
Casambi

Materials
Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.


Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,105 x 0,08 x 1,095 m
Vol 0,018 m³
Gross weight 3,35 Kg Net weight 2,46 Kg

Notes
3568 _ _ / _ 0: On/ Off Bi-volt
3568 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

LED IP20 104 x 4 cm



d 1,4 m x D 1,5 m 1581 lx
d 2,8 m x D 3 m 395 lx



Ceiling - Wall Washer



3575 Trim
27 x 4 cm



3578 Trimless
26 x 3 cm



3580 Trim
53 x 4 cm



3583 Trimless
51 x 3 cm




3585 Trim
104 x 4 cm




3588 Trimless
102 x 3 cm


TRIM



TRIMLESS



3575
TRIM



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1392 lm
/2 _ 3000 K - 1430 lm
/3 _ 3500 K - 1455 lm

Tunable White
/8 _ (2200 K - 4000 K)
764 lm - 849 lm

F

CRI >90

Control

3575 _ _ / _ _

_ _ / _ 0 Static White +
On/ Off

_ _ / _ D Static White +
Push, DALI-2

_ _ / _ M Static White +
Without driver

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8M Tunable White +
Without driver

_ _ / 8Z Tunable White +
Casambi

Materials

Frame: PC- Polycarbonate.
Body: Aluminum & PC-Polycarbonate.
Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,015 m^3
Gross weight 0,55 Kg Net weight 0,45 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20 CE UK CA EAC

26,2 x 3,5 cm



H 2,5 m x 1 m 75 lx
H 4 m x 1m 33 lx

3578
TRIMLESS



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1392 lm
/2 _ 3000 K - 1430 lm
/3 _ 3500 K - 1455 lm

Tunable White
/8 _ (2200 K - 4000 K)
764 lm - 849 lm

F

CRI >90

Control

3578 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,03 m^3
Gross weight 1,1 Kg Net weight 0,75 Kg

Notes


Trimless frame can be shipped in advance under request.

For tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20

27 x 4 cm



H 2,5 m x 1 m 75 lx
H 4 m x 1m 33 lx

3580
TRIM

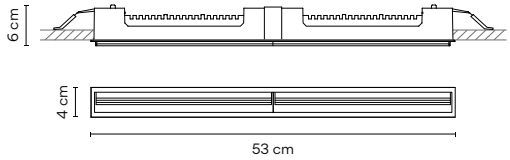

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2784 lm
/2 _ 3000 K - 2860 lm
/3 _ 3500 K - 2911 lm

Tunable White
/8 _ (2200 K - 4000 K)
1528 lm - 1698 lm

F

CRI >90

Control

3580 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

Materials

Frame: PC- Polycarbonate.
Body: Aluminum & PC-Polycarbonate.
Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 0,57 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

3580 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
3568 _ _ / _ Z: Casambi Bi-volt
For Tunable White versions, a grouping driver is recommended.
Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20 CE UK CA EAC

52 x 3,5 cm



H 2,5 m x 1 m 134 lx
H 4 m x 1m 60 lx

3583
TRIMLESS

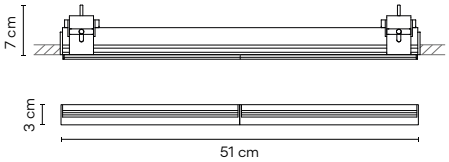

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2784 lm
/2 _ 3000 K - 2860 lm
/3 _ 3500 K - 2911 lm

Tunable White
/8 _ (2200 K - 4000 K)
1528 lm - 1698 lm

F

CRI >90

Control

3583 _ _ **/** _ _

_ _ **/** _ **0** Static White +
On/ Off

_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2

_ _ **/** _ **M** Static White +
Without driver

_ _ **/** _ **Z** Static White +
Casambi

_ _ **/ 81** Tunable White +
DALI-2 DT8

_ _ **/ 8M** Tunable White +
Without driver

_ _ **/ 8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,01 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3568 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt

3568 _ _ / _ Z: Casambi Bi-volt


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UKCA EAC


53 x 4 cm



H 2,5 m x 1 m 134 lx
H 4 m x 1m 60 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3585
TRIM

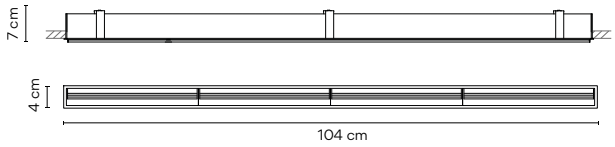

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5568 lm
/2 _ 3000 K - 5721 lm
/3 _ 3500 K - 5822 lm

Tunable White
/8 _ (2200 K - 4000 K)
3056 lm - 3396 lm

F

CRI >90

Control

3583 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Lens: PMMA.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 53,2 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 46 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,125 x 0,125 x 1,9 m
Vol 0,017 m^3
Gross weight 3,25 Kg Net weight 2,3 Kg

Notes

3585 _ _ / _ 0: On/ Off Bi-volt
3585 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
3585 _ _ / _ Z: Casambi Bi-volt
For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UKCA EAC


103 x 3,5 cm



H 2,5 m x 1 m 232 lx
H 4 m x 1m 107 lx

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3588
TRIMLESS

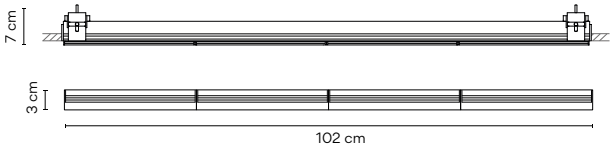

Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 5568 lm
/2 _ 3000 K - 5721 lm
/3 _ 3500 K - 5822 lm

Tunable White
/8 _ (2200 K - 4000 K)
3056 lm - 3396 lm

F
CRI >90

Control
3588 _ _ **/** _ _

_ _ **/ 0** Static White + On/ Off
_ _ **/ A** Static White + Push; 1-10V; DALI-2
_ _ **/ M** Static White + Without driver
_ _ **/ Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials
Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.


Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 53,2 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 46 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,017 m³
Gross weight 4,5 Kg Net weight 3,06 Kg

Notes
3588 _ _ / _ 0: On/ Off Bi-volt
3588 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
3588 _ _ / _ Z: Casambi Bi-volt
For Tunable White versions, a grouping driver is recommended.

LED IP20 104 x 4 cm



H 2,5 m x 1 m 232 lx
H 4 m x 1m 107 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.



Ceiling - Colour Mood Grazer



3605 Trim
103 x 4 cm


3608 Trimless
100 x 3 cm




3610 Trim
203 x 4 cm

3613 Trimless
202 x 3 cm


TRIM



TRIMLESS



3605
TRIM

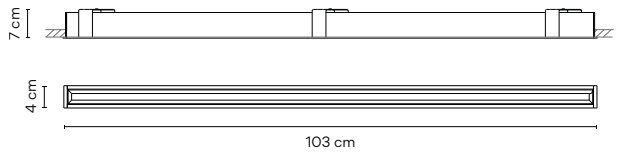

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Infinite Colour (TW+ RGB)
/A _ 1575 lm - 1861 lm
70 lm 11 (RED)
182 lm (GREEN)
35 lm (BLUE)
G
CRI >90

Control
3605 _ _ **/ AY** ProtoPixel*

Materials
Frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.


Light Source and electronics
1 x LED STRIP 24V 28 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,105 x 0,08 x 1,09 m
Vol 0,009 m^3
Gross weight 3,17 Kg Net weight 2,4 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20 CE UKCA EAC
102 x 3,5 cm

3608
TRIMLESS

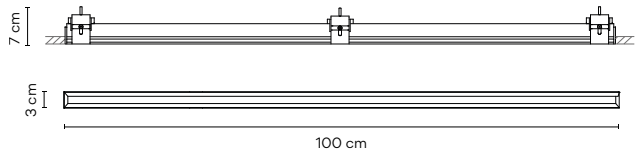

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Infinite Colour (TW+ RGB)
/A _ 1575 lm - 1861 lm
70 lm 11 (RED)
182 lm (GREEN)
35 lm (BLUE)
G
CRI >90

Control
3608 _ _ **/ AY** ProtoPixel*

Materials
Trimless frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED STRIP 24V 28 W
Constant Voltage 24VDC
220~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,02 m^3
Gross weight 3,17 Kg Net weight 2,4 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Trimless frame can be shipped in advance under request.

LED IP20 CE UKCA EAC
103 x 4 cm

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3610
TRIM

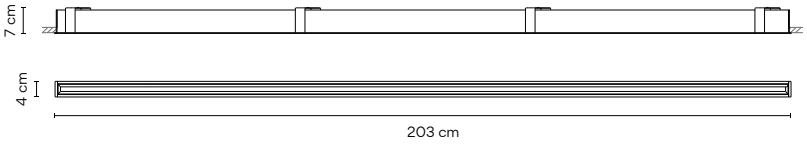

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Infinite Colour (TW+ RGB)
/A _ 3150 lm - 3722 lm
140 lm 11 (RED)
364 lm (GREEN)
70 lm (BLUE)
G
CRI >90

Control
3610 _ _ **/ AY** ProtoPixel*

Materials
Frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.


Light Source and electronics
1 x LED STRIP 56 W 24 V
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,125 x 0,125 x 2,09 m
Vol 0,047 m³
Gross weight 5,25 Kg Net weight 4,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.

LED IP20 CE UKCA EAC
202 x 3,5 cm

3613
TRIMLESS

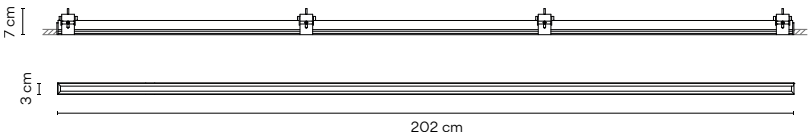

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Infinite Colour (TW+ RGB)
/A _ 3150 lm - 3722 lm
140 lm 11 (RED)
364 lm (GREEN)
70 lm (BLUE)
G
CRI >90

Control
3613 _ _ **/ AY** ProtoPixel*

Materials
Trimless frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1x LED STRIP 24V 56 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,093 m³
Gross weight 5,25 Kg Net weight 4,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Trimless frame can be shipped in advance under request.

LED IP20 CE UKCA EAC
203 x 4 cm



Palma

Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

Wall

3700
55 x 19 x 25 cm



3702
85 x 22 x 25 cm



3704
120 x 22 x 25 cm



3706
195 x 22 x 25 cm



3710
22 x 55 x 25 cm



3714
22 x 114 x 26 cm




3716
22 x 114 x 26 cm



3718
22 x 187 x 26 cm

3700



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3700 18 / 1B Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.


Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 3 Kg Net weight 1,8 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

3702



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3702 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V


Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,87 x 0,31 x 0,21 m
Vol 0,0581 m³
Gross weight 4,05 Kg Net weight 2,4 Kg

LED IP20

3704



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3704 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V


Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,2 Kg Net weight 3,9 Kg

LED IP20

3706



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F
CRI >90

Control
3706 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V


Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 6,4 Kg Net weight 3,9 Kg

LED IP20

3710



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3710 18 / 1B Push; 1-10V


Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20

3714



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3714 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V


Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 5,2 Kg Net weight 2,9 Kg

LED IP20

3716



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3716 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V


Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,5 Kg Net weight 4,2 Kg

LED IP20

3718



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F
CRI >90

Control
3718 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 8,6 Kg Net weight 6,1 Kg

LED IP20

Pendant

3720



Ø 25 cm

3724



Ø 25 cm

3726



Ø 25 cm

3728



Ø 25 cm

3730



Ø 25 cm

3734



150 cm

3735




150 cm

3736



195 cm

3720



Finishes

18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature

/1 _ 2700 K - 868 lm
F
CRI >90

Control

3720 _ _ / _ _

_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V
_ _ / **1Z** Casambi

Materials

Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics

2 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging


1 Box 0,71 x 0,27 x 0,21 m
Vol 0,0413 m³
Gross weight 3,75 Kg Net weight 2,8 Kg

Notes

Extra cable length.

LED IP20 Bi-volt

3724



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3724 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.


Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,02 x 0,27 x 0,21 m
Vol 0,0588 m³
Gross weight 4,6 Kg Net weight 3,3 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

3726



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3726 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.


Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,02 x 0,27 x 0,21 m
Vol 0,0588 m³
Gross weight 5,4 Kg Net weight 4,1 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

3728



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3728 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.


Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,75 x 0,53 x 0,21 m
Vol 0,0857 m³
Gross weight 8,8 Kg Net weight 4,7 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

3730



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F
CRI >90

Control
3730 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.


Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,75 x 0,53 x 0,21 m
Vol 0,0857 m³
Gross weight 9,5 Kg Net weight 5,4 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

3734



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2265 lm
F
CRI >90

Control
3734 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.


Light Source and electronics
1 x LED 2 W 500 mA
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,72 x 0,33 x 0,31 m
Vol 0,1790 m³
Gross weight 9,4 Kg Net weight 5,95 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

3735



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2265 lm
F
CRI >90

Control
3735 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.


Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,72 x 0,33 x 0,31 m
Vol 0,1790 m³
Gross weight 9,4 Kg Net weight 5,95 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

3736



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 3133 lm
F
CRI >90

Control
3736 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
1 x LED 2 W 500 mA
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 2,17 x 0,33 x 0,31 m
Vol 0,2219 m³
Gross weight 12,29 Kg Net weight 8,16 Kg

Notes
Extra cable length.

LED IP20
Dimmer Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Ceiling

3760




50 x 61 cm

3764



50 x 74 cm

3760



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3760 _ _ / _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi


Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,81 x 0,33 x 0,31 m
Vol 0,0083 m³
Gross weight 6,2 Kg Net weight 3,9 Kg

LED IP20 Bi-volt

3764



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 3472 lm
F
CRI >90

Control
3764 _ _ / _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
8 x LED 4,6 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,81 x 0,33 x 0,31 m
Vol 0,0083 m³
Gross weight 9,5 Kg Net weight 5,4 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Bigger

Design by La Invisible

Bigger serves as statement lighting without overbearing the space it occupies, radiating with profuse light which cascades down from the ceiling, its impressive scale bringing the space to life.

Ceiling


3900

Ø 80 cm



3905

Ø 84 cm




3910

Ø 103 cm




3915

Ø 107 cm

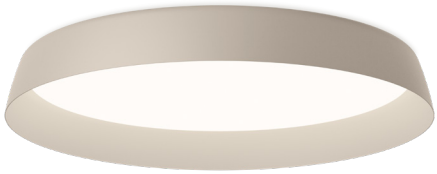

3900



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm
D

/3 _ 3500 K - 7359,4 lm
C

Tunable White

/8 _ (2200 K - 4000 K) 5748,1 lm - 7351,4 lm
C

CRI >90

Control

3900 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz


Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m^3
Gross weight 11,65 Kg Net weight 9,65 Kg

LED IP20 Dimmer Bi-volt

3905



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 6547,3 lm
D
/3 _ 3500 K - 7359,4 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C

CRI >90

Control

3905 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz


Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m³
Gross weight 12,7 Kg Net weight 10,75 Kg

LED IP20 Dimmer Bi-volt

3910



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3910 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz


Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m³
Gross weight 17,9 Kg Net weight 15,8 Kg

LED IP20 Dimmer Bi-volt

3915



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3915 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m³
Gross weight 19,2 Kg Net weight 17,1 Kg

LED IP20 Dimmer Bi-volt



Pendant



3920

Ø 80 cm



3925

Ø 84 cm



3930


Ø 103 cm



3935

Ø 107 cm

3920



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm
D

/3 _ 3500 K - 7359,4 lm
C

Tunable White

/8 _ (2200 K - 4000 K) 5748,1 lm - 7351,4 lm
C

CRI >90

Control

3920 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz


Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m^3
Gross weight 11,71 Kg Net weight 9,7 Kg

LED IP20 Dimmer Bi-volt

3925

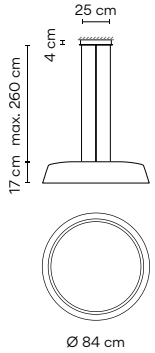

Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 6547,3 lm
D
/3 _ 3500 K - 7359,4 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C

CRI >90

Control

3925 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz


Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m³
Gross weight 12,75 Kg Net weight 10,75 Kg

LED IP20 Dimmer Bi-volt

3930

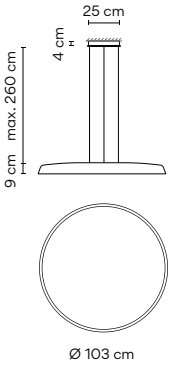

Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3930 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz


Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m³
Gross weight 18 Kg Net weight 15,9 Kg

LED IP20 Dimmer Bi-volt

3935

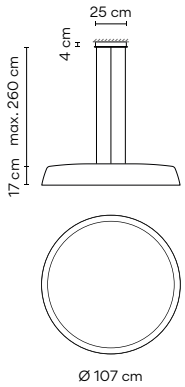

Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C
Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3935 _ _ **/** _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 0,16 x 0,3 m
Vol 0,487 m^3
Gross weight 19,3 Kg Net weight 17,2 Kg

LED IP20 Dimmer Bi-volt




Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition.
Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

Outdoor



4072
Ø 60 cm



4077
Ø 60 cm



4078
Ø 120 cm



4057
Ø 60 x 191 cm




4062
Ø 120 x 195 cm



4067
Ø 60 x 166 cm

4057



Finishes

- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1 _ 2700 K - 3299 lm
D
CRI >90

Control

4057 _ _ **/ 10** On/ Off

Materials

Shade: FG- Fiberglass. Weight: Concrete.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 1,0300 m³
Gross weight 45,1 Kg Net weight 27,8 Kg

Notes


Portable version. Electric cable 1,5 m

LED IP64

Product specifications subject to change without notice. Please check vibia.com for updated information.

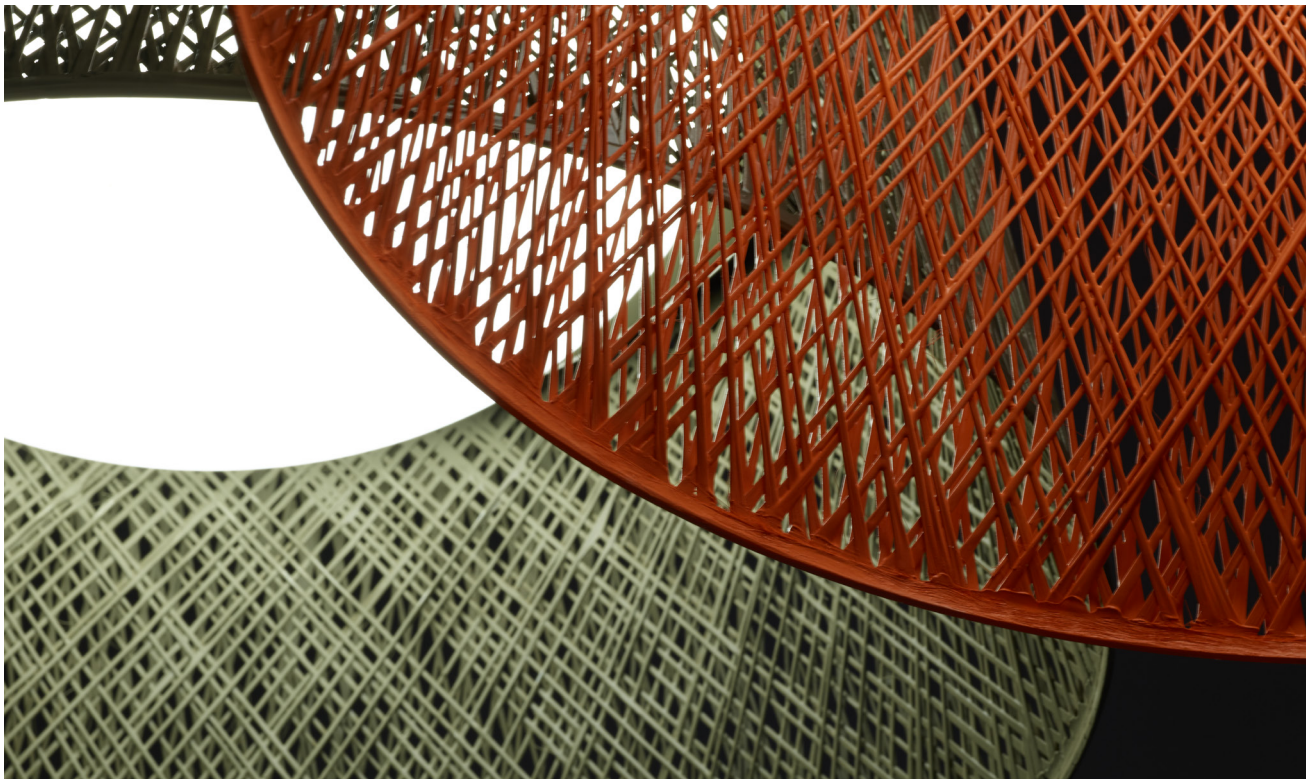

4062

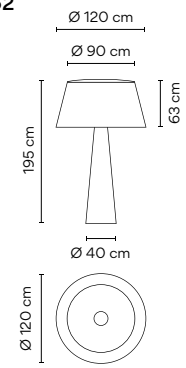

Finishes

- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1 _ 2700 K - 3481 lm

D

CRI >90

Control

4062 _ _ **/ 10** On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

4 x LED PLATE 14 W 500 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


4 Boxes
Total Vol 2,3500 m^3
Gross weight 125,2 Kg Net weight 113,23 Kg

Notes

Portable version. Electric cable 2 m

LED IP64

4067



Finishes

- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1 _ 2700 K - 3481 lm

D

CRI >90

Control

4067 _ _ **/ 10** On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

3 Boxes
Total Vol 1,5000 m^3
Gross weight 50 Kg Net weight 30,5 Kg


Notes

Portable version. Electric cable 1,5 m

LED IP64

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4072



Finishes
- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
/1 _ 2700 K - 3299 lm
D
CRI >90

Control
4072 _ _ **/ 10** On/ Off

Materials
Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.


Light Source and electronics
1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,50 x 0,77 x 0,77 m
Vol 0,2970 m³
Gross weight 11,1 Kg Net weight 9,9 Kg

Notes
Surface mounted
Extra cable length.

LED IP65

4077



Finishes
- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
/1 _ 2700 K - 3299 lm
D
CRI >90

Control
4077 _ _ **/ 10** On/ Off

Materials
Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.


Light Source and electronics
1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,67 x 0,67 x 0,62 m
Vol 0,2970 m³
Gross weight 11 Kg Net weight 9,9 Kg

Notes
Surface mounted
Extra cable length.

LED IP65 Bi-volt

4078



Finishes
- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
/1 _ 2700 K - 3299 lm
D
CRI >90

Control
4078 _ _ **/ 10** On/ Off

Materials
Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics
3 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,74 x 1,24 x 1,27 m
Vol 1,1300 m³
Gross weight 38 Kg Net weight 30 Kg

Notes
Indoor only
Extra cable length.

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Break

Design by Xuclà & Alemany

Break is distinguished by its architectural attitude. A series of cubic volumes provide indirect downlight while doubling up as a dynamic sculptural presence.


Outdoor



4101
25 x 81 cm




4106
25 x 43 cm



4108
48 x 38 cm

4101



Finishes
80/ _ _ Concrete
(Natural finish)

LED Colour Temperature
/1 _ 2700 K - 710 lm
E
CRI >80

Control
4101 _ _ **/ 10** On/ Off


Materials
Body: Steel.
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,1032 m³
Gross weight 38,9 Kg Net weight 35,01 Kg

LED IP66 Bi-volt

4106



Finishes
80/ _ _ Concrete
(Natural finish)

LED Colour Temperature
/1 _ 2700 K - 710 lm
E
CRI >80

Control
4106 _ _ **/ 10** On/ Offf

Materials
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.


Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,0598 m³
Gross weight 21,5 Kg Net weight 19,35 Kg

LED IP66 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4108



Finishes

22/ _ _ Graphite Black
(NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 2500 lm
D
CRI >80

Control

4108 22 / 10 On/ Off

Materials

Body: Steel.
Diffuser: PMMA.

Light Source and electronics

2 x LED Strip 9,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 0,49 x 0,51 x 0,52 m
Vol 0,1312 m^3
Gross weight 6,6 Kg Net weight 16 Kg

LED IP66




Break Plus

Design by Xuclà

Designed to blend instinctively with the architecture in which it exists, Break Plus converts any wall into a three dimensional mural. Arranged individually or as a group, it consists of four geometric volumes that cast beams of diffuse light upwards, downwards -or in both directions- creating a dynamic dialogue between light and shadow.

Outdoor

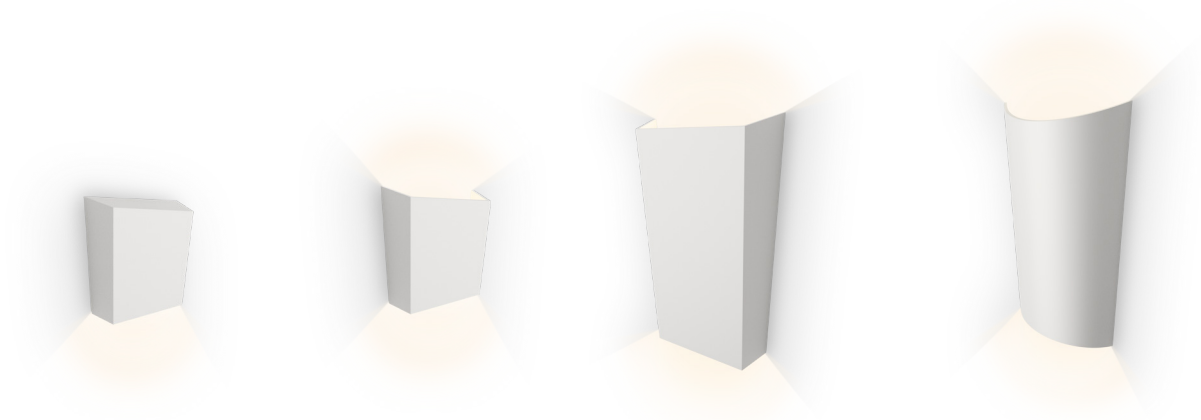


4112
12 x 14 cm

4114
12 x 14 cm

4116
21 x 34 cm

4118
19 x 32 cm

4112



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 113 lm
F

/3 _ 3500 K - 146 lm
D

CRI >90

Control

4112 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics


1 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m^3
Gross weight 1 Kg Net weight 0,610 Kg

LED IP65 Bi-volt

4114



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 227 lm
F

/3 _ 3500 K - 292 lm
D

CRI >90

Control

4114 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging


1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m^3
Gross weight 1 Kg Net weight 0,590 Kg

LED IP65 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4116



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
G

/3 _ 3500 K - 925 lm
F

CRI >90

Control

4116 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics


2 x LED 4W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
Vol 0,0120 m^3
Gross weight 3,2 Kg Net weight 2,2 Kg

LED IP65 Bi-volt

4118



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
G

/3 _ 3500 K - 925 lm
F

CRI >90

Control

4118 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
Vol 0,0120 m^3
Gross weight 3,2 Kg Net weight 1,71 Kg


LED IP65 Bi-volt

Empty


Design by Xuclà

Empty, lends itself to Vibia's 'furniture meets light' concept. Incorporating a table, stool and light fixture into a single three-dimensional entity, each geometric structure glows with subtle, indirect light from an invisible source.

Outdoor



4125
45 x 45 cm



4130
45 x 70 cm




4135
25 x 25 cm



4136
25 x 55 cm

4125



Finishes

18/ _ _ Polymer Concrete Grey (NCS S 2002-B50G)

22/ _ _Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 664 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4125 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging


1 Box 0,56 x 0,50 x 0,50 m
Vol 0,176 m^3
Gross weight 40 Kg Net weight 36 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Bi-volt

4130



Finishes

18/ _ _ Polymer Concrete Grey (NCS S 2002-B50G)

22/ _ _Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 664 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4130 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,81 m
Vol 0,254 m^3
Gross weight 54,7 Kg Net weight 49,7 Kg

Notes


Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4135



Finishes

18/ _ _ Polymer
Concrete Grey
(NCS S 2002-B50G)

22/ _ _Graphite Black
(NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 304 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4135 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 0,36 x 0,36 x 0,36 m
Vol 0,04 m³
Gross weight 12,2 Kg Net weight 10,4 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Bi-volt

4136



Finishes

18/ _ _ Polymer
Concrete Grey
(NCS S 2002-B50G)

22/ _ _Graphite Black
(NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 304 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4136 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,65 m
Vol 0,084 m³
Gross weight 22 Kg Net weight 19 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66
Dimmer Bi-volt

Out


Design by Víctor Carrasco

A romantic response to the global transition to life outside, Out brings the intimacy of indoor lighting outdoors. Suitable for illuminating a table or meeting point, this luminaire emanates with a soft, diffuse downlight, its source obscured by a translucent screen.

Floor Outdoor




4270 Not Fixed
211 x 242 cm

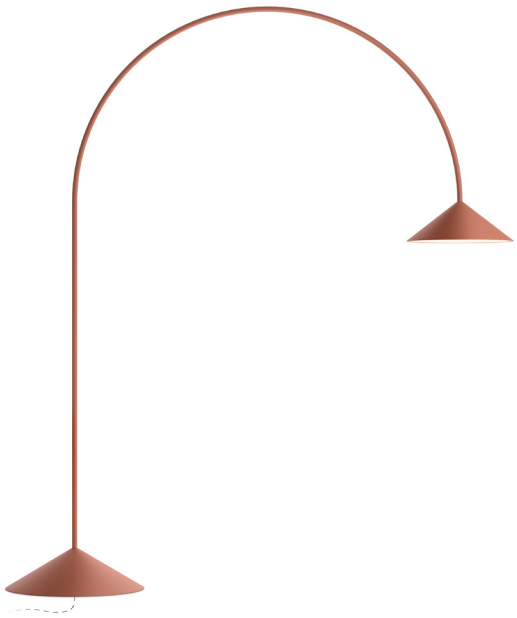

4275 Bolt-down “hard wired”
211 x 242 cm

4270



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1300 lm

F

CRI >90

Control

4270 _ _ **/** _ _

- _ _ **/** _ **5** Push
- _ _ **/** _ **Y** ProtoPixel*
- _ _ **/** _ **Z** Casambi

Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Voltage 24V 1.0A
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m^3
Gross weight 84 Kg Net weight 49,5 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

Switch on the cable. Electric cable 4 m.

LED IP44



4275



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1300 lm

F

CRI >90

Control

4275 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m³
Gross weight 84 Kg Net weight 49,5 Kg

Notes

Bolt-down “hard wired”

LED IP65

Up

Design by Ramos & Bassols

Inspired by the neoclassical cornice, Up's geometric form protudes from the ceiling with a quiet elegance. Its broad flat diffuser and refined rim create the illusion of daylight passing through an opening in the ceiling.

Ceiling


4440
Ø 50 cm




4442
Ø 77 cm




4460
106 x 106 cm

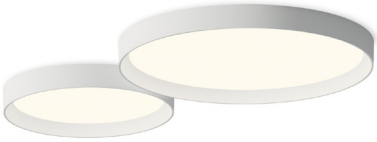


4452
31 x 121 cm



4454
64 x 64 cm



4440



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4440 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 26,5 W 500 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,55 x 0,55 m
Vol 0,0514 m^3
Gross weight 11 Kg Net weight 7,5 Kg

LED IP20 Bi-volt

4442



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F

CRI >90

Control

4442 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 55,3 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz


Packaging

1 Box 0,17 x 0,90 x 0,90 m
Vol 0,1377 m^3
Gross weight 13 Kg Net weight 15 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4452



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3957 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
4355 lm - 5744 lm
G - F

CRI >90

Control

4452 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,42 x 1,31 m
Vol 0,0924 m³
Gross weight 14 Kg Net weight 12 Kg

LED IP20 Bi-volt

4454



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3957 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
5050 lm - 5039 lm
G - F

CRI >90

Control

4454 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,73 x 0,73 m
Vol 0,0905 m³
Gross weight 14 Kg Net weight 13 Kg

LED IP20 Bi-volt

4460



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3957 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
5039 lm - 6699 lm
G - F

CRI >90

Control

4460 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
1 x LED PLATE 55,3W 750 mA
Constant Current 500 / 750 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1891 m³
Gross weight 24 Kg Net weight 23 Kg

Notes

Only one electric connection point

LED IP20 Bi-volt

Origami

Design by Ramón Esteve


Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

Wall Outdoor


4500
30 x 30 cm

4501
30 x 30 cm


4504
53 x 63cm



4506
70 x 91 cm

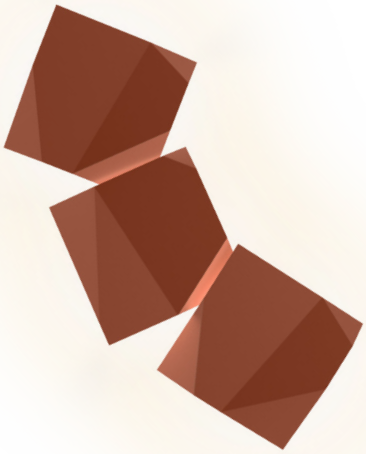


4508
94 x 107 cm

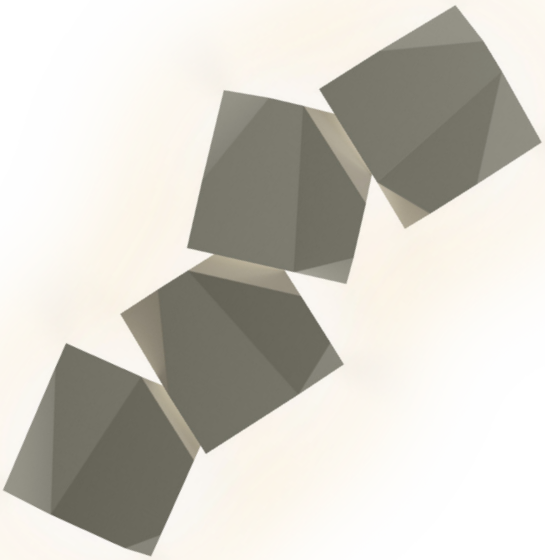


Product specifications subject to change without notice. Please check vibia.com for updated information.


Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Origami composition quick and easy at vibia.com

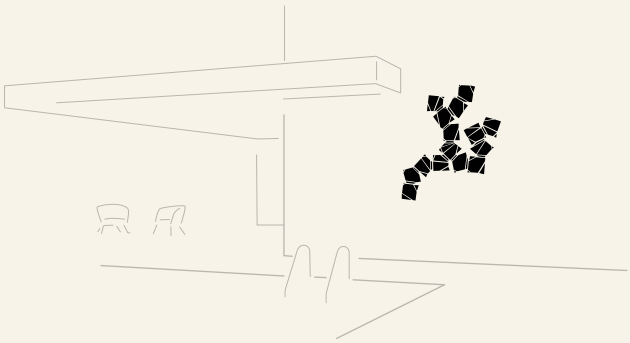

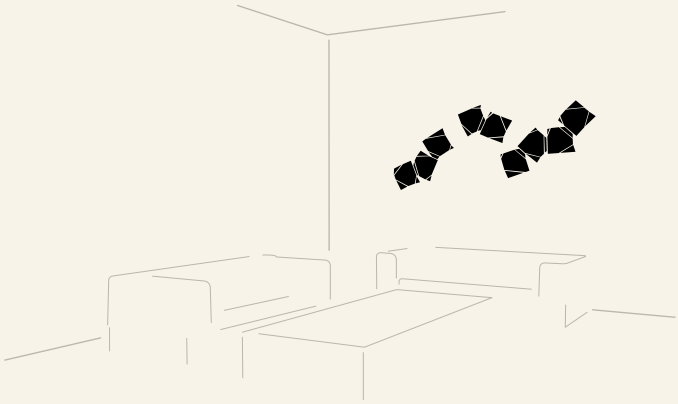

4500



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 756 lm
D

/3 _ 3500 K - 799 lm
E

CRI >90

Control

4500 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65

4501



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 756 lm
D

/3 _ 3500 K - 799 lm
E

CRI >90

Control

4501 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65

4504



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1512 lm
D

/3 _ 3500 K - 1598 lm
E

CRI >90

Control

4504 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

2 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,64 x 0,40 x 0,22 m
Vol 0,0563 m^3
Gross weight 4,05 Kg Net weight 2,15 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65

4506



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2269 lm
D

/3 _ 3500 K - 2397 lm
E

CRI >90

Control

4506 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

3 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,95 x 0,40 x 0,22 m
Vol 0,0836 m^3
Gross weight 5,33 Kg Net weight 3,23 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65

4508



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3025 lm
D

/3 _ 3500 K - 3196 lm
E

CRI >90

Control

4508 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

4 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 1,25 x 0,40 x 0,22 m
Vol 0,1100 m^3
Gross weight 7,2 Kg Net weight 6,48 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65




Palo Alto

Design by Xuclà

Palo Alto is defined by a linear, angular silhouette. Industrial in style yet natural in form, it recalls a tree whose steel “branches” are embedded with LEDs, illuminating the surrounding landscape with a diffuse downlight.

Outdoor

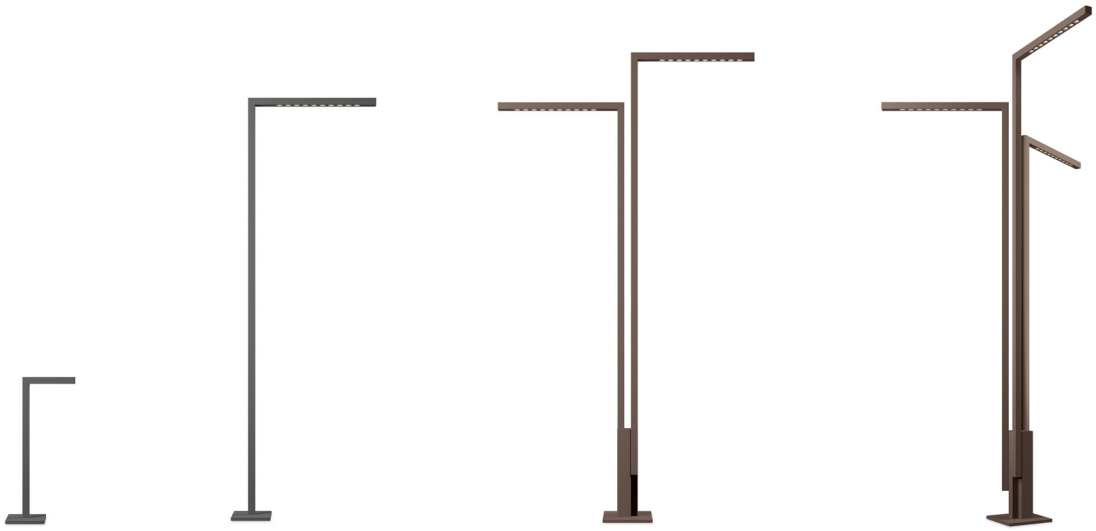


4510
35 x 90 cm

4516
85 x 280 cm

4539
85 x 310 cm

4540
136 x 310 x 161 cm

4510



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 179 lm
/3 _ 3500 K - 179 lm
G
CRI >90

Control
4510 _ _ **/** _ **0** On/ Off


Materials
Body: Steel.
Cover: Steel.

Light Source and electronics
2 x LED 2,2 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,44 x 0,40 x 1,10 m
Vol 0,2080 m³
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 Bi-volt

4516



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1044 lm
/3 _ 3500 K - 1045 lm
G
CRI >90

Control
4516 _ _ **/** _ **0** On/ Off

Materials
Body: Steel.
Cover: Steel.


Light Source and electronics
1 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,32 x 2,64 m
Vol 0,2703 m³
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4539



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2089 lm
/3 _ 3500 K - 2089 lm

G

CRI >90

Control

4539 _ _ / _ **0** On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


2 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 2,61 m
Vol 0,3570 m^3
Gross weight 46,4 Kg Net weight 41,76 Kg

LED IP65 Multi-volt

4540

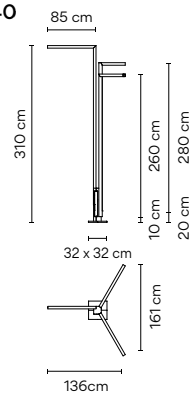

Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3134 lm
/3 _ 3500 K - 3134 lm

G

CRI >90

Control

4540 _ _ / _ **0** On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

3 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,40 x 0,44 x 2,64 m
Vol 0,4646 m^3
Gross weight 55,4 Kg Net weight 49,86 Kg

LED IP65 Multi-volt



Brisa

Design by Lievore, Altherr, Molina

Inspired by the forest blue bellflower,
Brisa is the essence of flawless landscape integration.
Its stylised silhouette and natural inspiration bring
a subtle charm to any exterior.

Outdoor



4625
10 x 103 cm



4630
10 x 100 cm




4635
22 x 99,5 x 23 cm



4640
30 x 100 x 27,5 cm

4625



Finishes

- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature

/1 _ 2700 K - 181 lm
G

/3 _ 3500 K - 193 lm
F

CRI >90

Control

4625 _ _ **/** _ **0** On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m^3
Gross weight 1,8 Kg Net weight 1,3 Kg


Notes

Spike. Surface

LED IP64 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4630



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature
- **/1** _ 2700 K - 543 lm
  G
- **/3** _ 3500 K - 581 lm
  F

CRI >90

Control
4630 _ _ **/** _ **0** On/ Off

Materials
Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m³
Gross weight 2,6 Kg Net weight 2 Kg

Notes
Built-in

LED IP65 Bi-volt Ø 13 cm

4635



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature
- **/1** _ 2700 K - 906 lm
  G
- **/3** _ 3500 K - 969 lm
  F

CRI >90

Control
4635 _ _ **/** _ **0** On/ Off

Materials
Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.


Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6,5 Kg Net weight 5,85 Kg

Notes
Built-in

LED IP65 Bi-volt Ø 17 cm

4640



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature
- **/1** _ 2700 K - 1268 lm
  G
- **/3** _ 3500 K - 1357 lm
  F

CRI >90

Control
4640 _ _ **/** _ **0** On/ Off

Materials
Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics
5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6 Kg Net weight 4 Kg

Notes
Built-in


LED IP65 Bi-volt Ø 22,5 cm

Dots

Design by Martín Azúa

A diminutive wall sconce delivers outsized impact in the form of simple, circular v. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.


Wall



Ø 17,5 cm

Ajustable: 360° turn.
4662: On-off switch on the back plate.


4660 - 4662



Ø 17,5 cm

Once installed position is fixed and cannot be adjusted.


4665



Ø 17,5 cm

Ajustable: 360° turn.


4670



Ø 17,5 cm

4675

4660



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

Control
4660 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** TRIAC

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

Control
4660 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** TRIAC

Materials
Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.


Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes
22º light halo

LED IP20

4662



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

Control
4662 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **4** TRIAC

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

4662 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **4** TRIAC

Materials
Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.


Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes
22º light halo
Switch on the back plate

LED IP20

4665



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control

4665 _ _ / _ **0** On/ Off

Materials

Body: ABS.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics


1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
Gross weight 0,65 Kg Net weight 0,4 Kg

LED IP20

4670



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control

4670 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** TRIAC

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control

4670 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz


Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

4675



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 573 lm
E
/3 _ 3500 K - 515 lm
F
CRI >90

Control

4675 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** TRIAC

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 515 lm
F
CRI >90

Control

4675 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 4,5 W 500 mA
Constant Current 500 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m^3
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

LED IP20



Dots Glass

Design by Martín Azúa

Sheathed in layers of transparent optical glass, the LED source within the fixture generates a warm, 360-degree glow, while the layering of the glass and aluminum at the edge of each disc creates a pulsating ambient effect.


Wall Outdoor



4680

Ø 20 cm

4680



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 985 lm
/3 _ 3500 K - 1015 lm

F

CRI >90

Control

4680 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: Optical Glass.

Light Source and electronics

1 x LED 10 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging

1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m^3
Gross weight 1,8 Kg Net weight 2,2 Kg

Notes

4680 _ _ / _ 3: 1-10V Bi-volt

LED IP66




Dots Outdoor

Design by Martín Azúa

Diminutive, compact and easily installed, Dots Outdoor is the perfect solution for subtle outdoor illumination. Designed to nestle discreetly into the undergrowth of a garden or patio, Dots shines at night with a diffuse or focused glow from an invisible source.


Outdoor

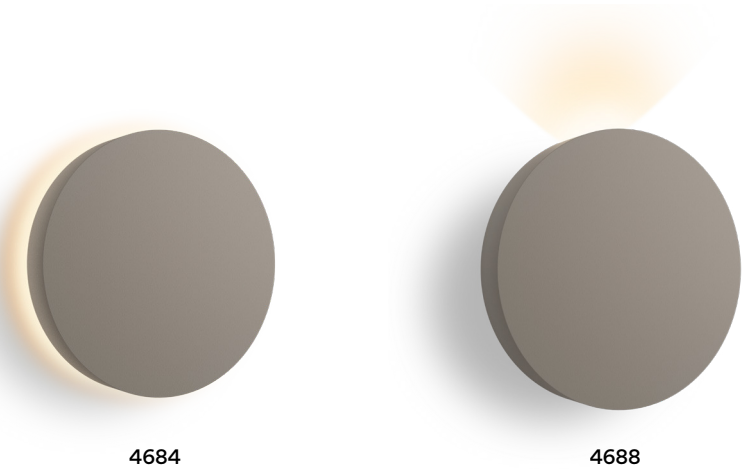

4684
Ø 20 cm

4688
Ø 20 cm

4684



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 400 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control
4684 _ _ **/** _ _

_ _ **/ _ 0**	On/ Off
_ _ **/ _ 1**	DALI-2
_ _ **/ _ 3**	1-10V
_ _ **/ _ Z _ 30**	Casambi (Remote)

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 4,5 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m^3
Gross weight 1,6 Kg Net weight 2,0 Kg

Notes
4684 _ _ / _ 0: On/ Off Bi-volt

LED IP66

4688



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 500 lm
/3 _ 3500 K - 515 lm
F
CRI >90

Control
4688 _ _ **/** _ _

_ _ **/ _ 0**	On/ Off
_ _ **/ _ 1**	DALI-2
_ _ **/ _ 3**	1-10V
_ _ **/ _ Z _ 30**	Casambi (Remote)

Materials
Body: Aluminium.
Diffuser: Glass.

Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz


Packaging
1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m^3
Gross weight 1,7 Kg Net weight 2,1 Kg

Notes
4688 _ _ / _ 0: On/ Off Bi-volt


LED IP66

Product specifications subject to change without notice. Please check vibia.com for updated information.

Outdoor



4695
Ø 20 x 12 cm



4697
Ø 15 x 9 cm




4700
Ø 20 x 12 cm



4702
Ø 15 x 9 cm

4695



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 750,2 lm
F
CRI >90

Control
4695 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)


Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 7,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging
1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m^3
Gross weight 3,4 Kg Net weight 2,7 Kg

LED IP65 Multi-volt

4697



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 375,9 lm
F
CRI >90

Control
4697 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED STRP 4,6W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0624 m^3
Gross weight 1,9 Kg Net weight 1,5 Kg

LED IP65 Multi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4700



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1445 lm
F
CRI >90

Control
4700 _ _ / _ _

_ _ / _ **0**	On/ Off
_ _ / _ **1** _ **30**	DALI-2 (Remote)
_ _ / _ **Z** _ **30**	Casambi (Remote)


Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 14,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging
1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m³
Gross weight 3,8 Kg Net weight 3,1 Kg

LED IP65 Multi-volt

4702



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1294 lm
F
CRI >90

Control
4702 _ _ / _ _

_ _ / _ **0**	On/ Off
_ _ / _ **1** _ **30**	DALI-2 (Remote)
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 12,8W 300 mA
Constant Current 300 mA
100~277V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0146 m³
Gross weight 1,9 Kg Net weight 1,5 Kg

LED IP65 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.




Meridiano

Design by Jordi Vilardell & Meritxell Vidal

Composed of a structure of corrugated steel rods, Meridiano radiates with a burst of light and shadow that enriches its surrounding environment. As a floor lamp, it doubles up as outdoor furniture; as a wall sconce, it animates a bare façade with a dynamic sunburst motif.

Outdoor




4720



4710


Ø 64 cm

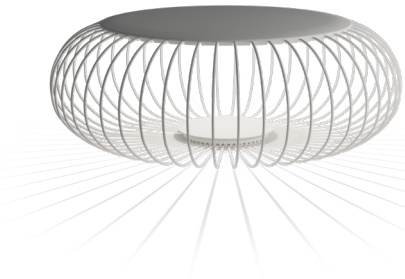

4715

Ø 92 cm

4710



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/3 _ 3500 K - 1709 lm
C
CRI >80

Control

4710 _ _ **/** _ **0** On/ Off

Materials

Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,57 x 0,66 x 0,66 m
Vol 0,2483 m³
Gross weight 18,2 Kg Net weight 15,6 Kg

Notes

It can be connected with or without a plug.
Electric cable 2 m.

LED IP64 Bi-volt

4715



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/3 _ 3500 K - 1709 lm
C
CRI >80

Control

4715 _ _ **/** _ **0** On/ Off **1.740,00 €**

Materials

Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,43 x 0,94 x 0,94 m
Vol 0,38 m³
Gross weight 20,1 Kg Net weight 16,7 Kg

Notes


It can be connected with or without a plug.
Electric cable 2 m.

LED IP64 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4720



Finishes

07/ _ _ Khaki
(RAL 7006)

58/ _ _ Off-white
(PANTONE
WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/3 _ 3500 K - 1709 lm
C
CRI >80

Control

4720 _ _ **/** _ **0** On/ Off

Materials

Base: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,106 x 0,310 x 0,310 m
Vol 0,102 m³
Gross weight 1,5 Kg Net weight 1 Kg

LED IP65 Bi-volt

June

Design by Ana Mir + Emili Padrós (Emiliana Design Studio)

Inspired by traditional lanterns, June's moon-like spheres cast a warm, ambient glow, lending a touch of nostalgia to an outdoor space.

Outdoor



4785


Ø 9 x 120 cm



4780

Ø 9 x 80 cm

4780



Finishes

54/ _ _ Brown
(Pantone Black U)

LED Colour Temperature

/1 _ 2700 K - 95,5 lm
F

CRI >90

Control

4780 54 / 10 On/ Off

Materials

Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics

1 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1 x 0,4 x 0,4 m
Vol 0,16 m³
Gross weight 5 Kg Net weight 3 Kg

Notes


Built-in.

LED IP65 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4785



Finishes

● **54/** _ _ Brown
(Pantone Black U)

LED Colour Temperature

/1 _ 2700 K - 190,9 lm
F
CRI >90

Control

4785 54 / 10 On/ Offf

Materials

Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics

2 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1,5 x 0,4 x 0,4 m
Vol 0,24 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

Built-in.

LED IP65 Bi-volt

Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

Outdoor



4820
19 x 6 cm



4800 4802
6 x 60 cm

4801 4803
6 x 90 cm

4804
6 x 190 cm


4805
6 x 270 cm

4810
Ø 43 x 190 cm

4811
Ø 35 x 270 cm

4812
Ø 40 x 270 cm

4800



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 181,2 lm
/3 _ 3500 K - 181,2 lm

G

CRI >90

Control

4800 _ _ / _ **0** On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA .

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 1,3 m
Vol 0,0203 m^3
Gross weight 4 Kg Net weight 3,6 Kg


Notes

Surface

LED IP66 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4801



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 362,4 lm
/3 _ 3500 K - 362,4 lm
G
CRI >90

Control
4801 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 6 Kg

Notes
Surface

LED IP66 Bi-volt

4802



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 181,2 lm
/3 _ 3500 K - 181,2 lm
G
CRI >90

Control
4802 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 7 Kg Net weight 5,5 Kg

Notes
Built-in

LED IP66 Bi-volt

4803



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 362,4 lm
/3 _ 3500 K - 362,4 lm
G
CRI >90

Control
4803 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP66 Bi-volt

4804



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 543,7 lm
/3 _ 3500 K - 543,7 lm
G
CRI >90

Control
4804 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 8 Kg Net weight 6,5 Kg

Notes
Built-in

LED IP66 Bi-volt

4805



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 724,9 lm
/3 _ 3500 K - 724,9 lm
G
CRI >90

Control
4805 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0600 m³
Gross weight 9 Kg Net weight 7 Kg

Notes
Built-in

LED IP66 Bi-volt

4810



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 906,1 lm
/3 _ 3500 K - 906,1 lm
G
CRI >90

Control
4810 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1388 m³
Gross weight 15 Kg Net weight 12,5 Kg

Notes
Built-in

LED IP66 Bi-volt

4811



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 1268,5 lm
/3 _ 3500 K - 1268,5 lm
G
CRI >90

Control
4811 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
7 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz


Packaging
3 Boxes
Total Vol 1,660 m³
Gross weight 16,5 Kg Net weight 13 Kg

Notes
Built-in

LED IP66 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4812

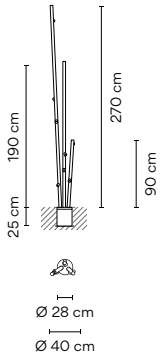

Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 1631,0 lm
/3 _ 3500 K - 1631,0 lm
G
CRI >90

Control
4812 _ _ / _ **0** On/ Off **2.965,00 €**

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
9 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
4 Boxes
Total Vol 0,1854 m³
Gross weight 21,6 Kg Net weight 19,44 Kg

Notes
Built-in

LED IP66 Bi-volt

4815



Finishes
- **18** Polymer concrete (NCS S 2002-B50G)


4815 18

Materials
Base: Polymer concrete.

Packaging
1 Box 0,40 x 0,50 x 0,50 m
Vol 0,1000 m³
Gross weight 39 Kg Net weight 35 Kg

Notes
Surface installation accessory.
For ref. 4810. 4811. 4812

4820



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 181,2 lm
/3 _ 3500 K - 181,2 lm
G
CRI >90

Control
4820 _ _ / _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,10 x 0,10 m
Vol 0,0025 m³
Gross weight 2 Kg Net weight 1 Kg

Notes
Surface

LED IP66 Bi-volt

Duo

Design by Ramos & Bassols

Duo brings natural warmth to a space. Its gently curved form encases a supple wood-finished interior, lending a soothing sensibility.

Ceiling

4870
Ø 47,5 cm



4872
Ø 78,5 cm



4874
Ø 35 cm



4878
Ø 70 cm




4876
Ø 35 cm



4880
Ø 70 cm



4870



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F
CRI >90 CRI >80

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F
CRI >90

Control

4870 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz


Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m^3
Gross weight 7 Kg Net weight 6 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4872



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm
F
/3 _ 3500 K - 4133 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F

CRI >90

Control

4872 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED IP20 Bi-volt

4874



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
1244 lm - 1582 lm
G - F

CRI >90

Control

4874 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED IP20 Bi-volt

4876



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
1244 lm - 1582 lm
G - F

CRI >90

Control

4876 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz


Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4878



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4878 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 Bi-volt

4880



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4880 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 Bi-volt



Duo Petra

Design by Ramos & Bassols

Duo Petra's slate veneer lends a timeless elegance to the collection. The ceiling lamp's gently curved form encases a velvety slate-finished interior for a sophisticated, natural aesthetic.

Ceiling

4871

Ø 47,5 cm



4873

Ø 78,5 cm



4875

Ø 35 cm



4877

Ø 35 cm



4879

Ø 70 cm




4881

Ø 70 cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

4871



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4871 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics


1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m³
Gross weight 7 Kg Net weight 6 Kg

LED IP20 Bi-volt

4873



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm
F

/3 _ 3500 K - 4133 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F

CRI >90

Control

4873 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics


1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED IP20 Bi-volt

4875



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
1244 lm - 1582 lm
G - F

CRI >90

Control

4875 _ _ / _ _

- _ _ / **11** Static White + DALI-2
- _ _ / **1B** Static White + Push; 1-10V
- _ _ / **1Z** Static White + Casambi
- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz


Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4877



Finishes
- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K) 1244 lm - 1582 lm
G - F

CRI >90

Control

4877 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics


1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED IP20 Bi-volt

4879



Finishes
- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4879 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics


1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 Bi-volt

4881



Finishes
- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4881 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Warm

Design by Ramos & Bassols

A contemporary take on a timeless design,
Warm features a generous drum shade in
a muted colour palette for a refined touch.

Table



4895 4896


Ø 19 x 41 cm



4900 4901

Ø 32,4 x 59 cm

4895



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 470 lm

4895 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED G9 230V 4,2 W

Packaging


2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 1,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20

4896



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 470 lm

4896 _ _ / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED G9 230V 4,2 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 2 Kg


Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20



4900



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4900 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging


2 Boxes
Total Vol 0,2153 m³
Gross weight 4,3 Kg Net weight 3,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20

4901



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4901 _ _ / 00

Materials

Shade: Aluminum.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,2153 m³
Gross weight 4,8 Kg Net weight 4,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20


Floor



4905 4906

Ø 32,4 x 150 cm

4905



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4905 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging


2 Boxes
Total Vol 0,3426 m³
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m

IP20

4906



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4906 _ _ / 00

Materials

Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m

IP20


Pendant



4925 4926

Ø 62 cm

4925



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4925 10 / 00

Materials

Shade: Screen.
Canopy: Steel.
Diffuser: PMMA.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging


1 Box 0,68 x 0,68 x 0,39 m
Vol 0,18 m³
Gross weight 7,7 Kg Net weight 3,9 Kg

Notes

Extra cable length.

IP20 CE UKCA EAC

4926



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4926 _ _ / 00

Materials

Shade: Aluminum.
Canopy: Steel.
Diffuser: PMMA.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 0,77 x 0,77 x 0,50 m
Vol 0,2965 m³
Gross weight 8,9 Kg Net weight 5,1 Kg

Notes

Extra cable length.

IP20 CE UKCA EAC

Ghost

Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates with a warm, welcoming glow.

Table



4960

Ø 47,5 x 112 cm



4965

Ø 47,5 x 92 cm



4970


Ø 47,5 x 88 cm

Dimming and installation options






/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer pression dims the light.

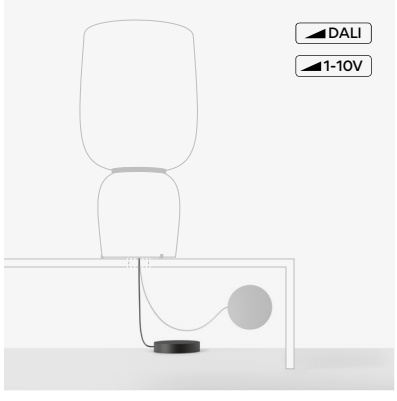



Dimming and installation options: The driver of the DALI-2, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

4960

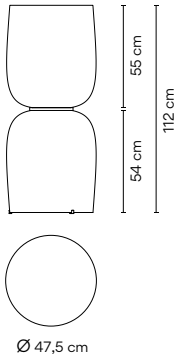

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
D
CRI >90

Control
4960 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
(with or without memory)
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.


Light Source and electronics
2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6051 m³
Gross weight 25,7 Kg Net weight 22,7 Kg

Notes
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED □ IP20 Dimmer Bi-volt

4965



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
D
CRI >90

Control
4965 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
(with or without memory)
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.


Light Source and electronics
2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6051 m³
Gross weight 20,6 Kg Net weight 17,6 Kg

Notes
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED □ IP20 Dimmer Bi-volt

4970



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
D
CRI >90

Control
4970 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
(with or without memory)
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics
2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6051 m³
Gross weight 21,7 Kg Net weight 18,7 Kg

Notes
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED □ IP20 Dimmer Bi-volt


1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Pendant



4987
Ø 47,5 cm

4987

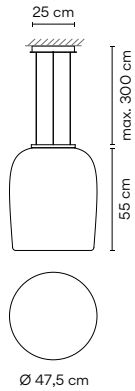

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4826,7 lm
D
CRI >90

Control
4987 _ _ **/** _ _

_ _ **/** _ **A** Push; -10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics
1 x LED 37,2 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
1 Box 0,61 x 0,62 x 0,80 m
Vol 0,3026 m³
Gross weight 13,9 Kg Net weight 12,4 Kg
Extra cable length.

LED | IP20 | Dimmer | Bi-volt

 Product specifications subject to change without notice. Please check vibia.com for updated information.




Balance

Design by Jordi Vilardell

Balance features a classic drum shade, elegantly cantilevered from its column to provide a general ambient lighting effect or a more focused reading light.

Floor

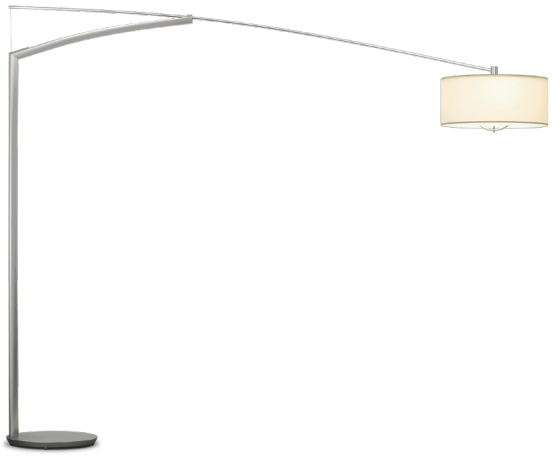

5189 5190

260 x 210 cm




5191 5192

215 x 210 cm



5189



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5189 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Aluminum.


Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UKCA EAC Dimmer

5190



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5190 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Parchment paper.


Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UKCA EAC Dimmer

5191



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5191 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Parchment paper.


Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UKCA EAC Dimmer

5192



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5192 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Aluminum.

Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UKCA EAC Dimmer

Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

Ceiling Wall

5410
24,4 x 6,6 cm


5412
27,2 x 7,7 cm

5425 5427
31,8 x 24,2 cm

5430 5432
46,7 x 38 cm

5435 5437
56,8 x 49,2cm

5410



Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5410 03 / 00 On/ Off


Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
1 x LED G9 4,2 W

Packaging
1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg

IP20 Bi-volt

5412



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 880 lm
E
CRI >90

Control
5412 03 / 10 On/ Off


Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
1 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg

IP20 Bi-volt

5425



Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K - 470 lm

5425 03 / 00 On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes
All version require only one electrical connection

IP20 Bi-volt

5427



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 831 lm
D
/3 _ 3500 K - 878 lm
G
CRI >90

Control
5427 03 / _ **0** On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED PLATE 3,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes
All version require only one electrical connection

IP20 Bi-volt


1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5430

Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5430 03 / 00 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection


IP20 Bi-volt

5432

Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1760 lm
E
CRI >90

Control
5432 03 / 10 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection


IP20 Bi-volt

5435

Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5435 03 / 00 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
3 x LED G9 4,2 W

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection


IP20 Bi-volt

5437

Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 2640 lm
E
CRI >90

Control
5437 03 / 10 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
3 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection

IP20 Bi-volt



Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art combines two circular wall lights of different sizes and colours, superimposed on top of one another, and combining to create a set of highly dynamic, sculptural compositions. The collection provides ambient indirect light and only requires a single electrical connection.

Wall



5470
Ø 30 cm




5471
Ø 40 cm



5472
Ø 45 cm




5474
Ø 46 cm




5476
Ø 60 cm



5480
58 x 58 x 6 cm




5481
69 x 69 x 9 cm




5485
68 x 68 x 9 cm



5487
87 x 87 x 9 cm

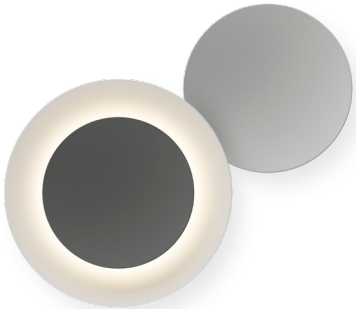


5486
87 x 87 x 11 cm

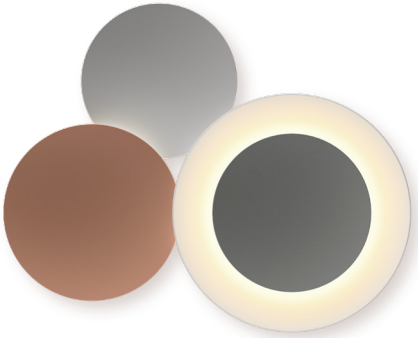

5491
103 x 84 x 11 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique.
Personalise your own
Puck Wall Art composition
quick and easy.

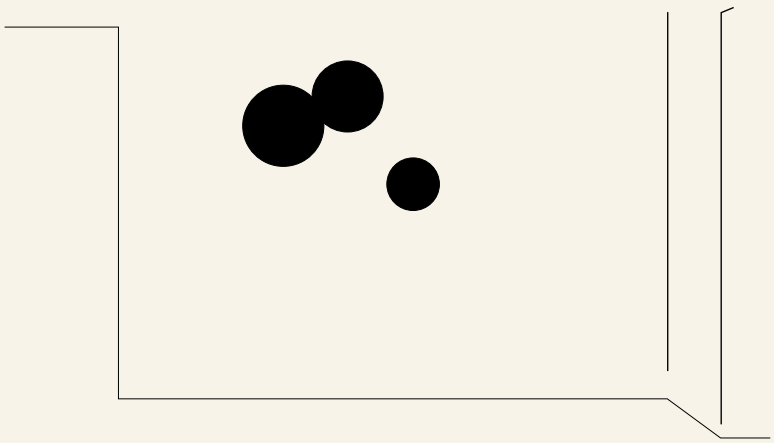


5470

Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED Colour Temperature
/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm
E
CRI >90

Control
5470 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi



Finishes
- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm
E
CRI >90

Control
5470 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.


Light Source and electronics
1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging
1 Box 0,34 x 0,34 x 0,23 m
Vol 0,0266 m^3
Gross weight 2,6 Kg Net weight 1,6 Kg

Notes
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Dimmer Bi-volt

5471



Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5471 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.


Light Source and electronics
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging
1 Box 0,44 x 0,44 x 0,25 m
Vol 0,0484 m³
Gross weight 3,5 Kg Net weight 1,9 Kg

Notes
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Bi-volt

5472



Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5472 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.


Light Source and electronics
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging
1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Bi-volt

5474



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm

E

CRI >90

Control

5474 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Bi-volt

5476



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm

E

CRI >90

Control

5476 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,66 x 0,66 x 0,235 m
Vol 0,1024 m³
Gross weight 6,3 Kg Net weight 2,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Bi-volt

5480



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5480 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging


1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m³
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Bi-volt

5481



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5481 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz


Packaging

1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m³
Gross weight 6,1 Kg Net weight 3,4 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5485



Finishes
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
- **73/** _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature
/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm
E
CRI >90

Control
5485 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Finishes
- **71/** _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm
E
CRI >90

Control
5485 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi


Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics
1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging
1 Box 0,51 x 0,51 x 0,43 m
Vol 0,1118 m³
Gross weight 8,42 Kg Net weight 4,22 Kg

LED IP20 Bi-volt

5486



Finishes
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
- **73/** _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature
/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm
E
CRI >90

Control
5486 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Finishes
- **71/** _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm
E
CRI >90

Control
5486 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.


Light Source and electronics
2 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging
1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,35 Kg Net weight 5,45 Kg

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5487



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

73/ _ _ Brown M1 & Black Grey
(NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5487 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5487 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt


/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,52 Kg Net weight 5,62 Kg

LED | IP20 | Bi-volt

5491



Finishes

72/ _ _ Black Grey & Grey L2
(NCS S 7000-N, NCS S 2500-N)

73/ _ _ Brown M1 & Black Grey
(NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 4307 lm
/3 _ 3500 K - 4601 lm

E

CRI >90

Control

5491 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 4307 lm
/3 _ 3500 K - 4601 lm

E

CRI >90

Control

5491 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt

/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
Vol 0,2919 m³
Gross weight 14,85 Kg Net weight 7,35 Kg

LED | IP20 | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Mayfair Mini

Design by Diego Fortunato

The perfect lighting companion, Mayfair Mini is a small-scale design that casts a contained pool of diffuse, downlight for an intimate atmosphere. A light to grab and go that can be moved where needed -indoors or out- via its slender stem.

Table



5495

Ø 20 x 38 cm

Portable



5496

Ø 20 x 38 cm

Bolt-down




5497

Ø 20 x 38 cm

Bolt-down

5495



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **38** Terra Dark (NCS S 5040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 223 lm

E

CRI >90

Control

5495 _ _ **/ 16** Touch sensor

Materials

Base and shade: ABS + PC- Polycarbonate.
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m^3
Gross weight 1,62 Kg Net weight 0,73 Kg

Notes


Rechargeable battery autonomy:
6h at 100% Intensity.
12h at 50% Intensity.
18h at 25% Intensity.

USB-C cable: length 1,20 m
(from the base to the USB charger).

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5496



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **38** Terra Dark (NCS S 5040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 223 lm
E
CRI >90

Control

5496 _ _ **/ 16** Touch sensor (with or without memory)

Materials

Base and shade: ABS + PC- Polycarbonate
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging


1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m^3
Gross weight 1,84 Kg Net weight 0,94 Kg

Notes

Cable length: 1 m
(from the base to the USB charger)

LED IP20 Bi-volt

5497



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **38** Terra Dark (NCS S 5040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 223 lm
E
CRI >90

Control

5497 _ _ **/** _ _

_ _ **/ 10** On/ Off
_ _ **/ 11** DALI-2
_ _ **/ 13** 1-10V

Materials

Base and shade: ABS + PC- Polycarbonate
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m^3
Gross weight 1,45 Kg Net weight 0,54 Kg

Notes

Cable length: 1 m. (the cable connects directly to the remote driver)

LED IP20 Bi-volt



Mayfair

Design by Diego Fortunato

A modern reimagining of the traditional 19th-century bouillotte lamp, the Mayfair collection is a statement in contemporary design. Perfectly proportioned, its luminaire casts a pool of diffuse, downward light to create an intimate lighting effect.

Table Floor



5500

Ø 30 x 52 cm



5505

Ø 30 x 52 cm



5510


Ø 30 x 147 cm



5515

Ø 30 x 147 cm

5500



Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5500 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m^3
Gross weight 3,6 Kg Net weight 3,4 Kg


Notes

Touch dimmer on base. Electric cable 2 m.

LED IP20 Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5505



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

Control

5505 _ _ / _ _

_ _ **/ 16** Optical sensor
_ _ **/ 18** Push 2 (without memory)

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

Control

5505 _ _ / _ _

_ _ **/ 16** Optical sensor
_ _ **/ 18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m^3
Gross weight 3,6 Kg Net weight 3,4 Kg


Notes

Touch dimmer on base. Electric cable 2 m.

LED □ IP20 CE UK CA EAC Dimmer Bi-volt



5510

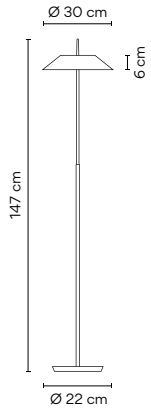

Finishes

- **07/** _ _ Graphite and green (RAL 7016. RAL 6026)
- **08/** _ _ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5510 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 1,50 x 0,32 x 0,34 m
Vol 0,1630 m^3
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m.

LED □ IP20 CE UK CA EAC Dimmer Bi-volt

5515

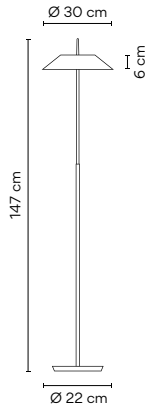

Finishes

- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5515 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5515 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel.
Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,50 x 0,32 x 0,34 m
Vol 0,1630 m^3
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes


Touch dimmer on shade. Electric cable 2 m.

LED □ IP20 CE UK CA EAC Dimmer Bi-volt



Pendant

INDIVIDUAL MODEL



5520 Ø 30 cm


5525 Ø 30 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

5520



Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5520 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **B** Push; 1-10V

_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m^3
Gross weight 2,8 Kg Net weight 1,8 Kg


Notes

Extra cable length.

LED IP20

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

5525



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

Control

5525 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

5525 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Ttube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m^3
Gross weight 2,9 Kg Net weight 1,9 Kg

Notes

Extra cable length.

LED IP20




Select your model at **vibia.com** and adjust



2 x 5525



3 x 5525



4 x 5525



4 x 5525



5 x 5525



7 x 5525



8 x 5525



10 x 5525



22 x 5525



16 x 5525

See more multiple models at **vibia.com**

Finishes
5520

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

Finishes
5525

20/ _ _ Gold

67/ _ _ Copper

18/ _ _ Graphite (RAL 7016)

23/ _ _ Warm White (NCS S 0502-Y50R)

25/ _ _ Beige D1 (NCS S 4005-Y50R)

38/ _ _ Terra Dark (NCS S 5040-Y70R)

47/ _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K
CRI >90

Control
Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5520, 5525

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16 cm

match with fixture finish.

_18
Free Wire




Ø 20 cm

Ø 36 cm


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials
5520
Diffuser: PC- Polycarbonate. Shade: PMMA. Tube and canopy: Steel.
5525
Diffuser: PC- Polycarbonate. Shade, tube and canopy: Steel.

Notes
Additional cable length from 2 m.

LED IP20



Africa

Design by Francisco Gomez Paz

An object of desire, Africa is a unique gift that
combines richness of form and materiality
with high performance lighting capabilities.
A holistic exploration of beauty and functionality.


Table



5580
Ø 5 x 45 cm
Portable



5585
Ø 5 x 40 cm
Portable

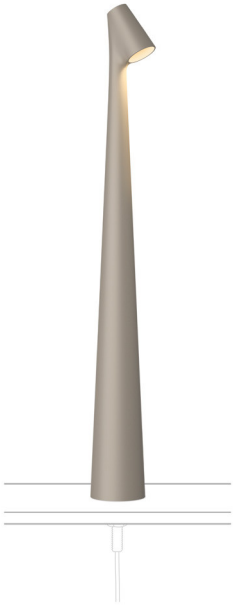


5590
Ø 5 x 45 cm
Bolt-down



5595
Ø 5 x 40 cm
Bolt-down

5580



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5580 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate

Light Source and electronics
1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz


Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m^3
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes
Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5585



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5585 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes
Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 Bi-volt

5590



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5590 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m

LED IP20

5595



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5595 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control




A439
Ø 27 cm



A440
Ø 27 cm

A439



Finishes
83/ _ _ Walnut (Tray)

Control
A439 83 / 00 On/ Off

Materials
Tray: Wood (Rustic Walnut)


Output: DC 5.0V 4.0 A.
Input: 100~240V 50/60Hz

Packaging
1 Box 0,350 x 0,350 x 0,090 m
Vol 0,0110 m³
Gross weight 1,2 Kg Net weight 0,750 Kg

Notes
Electric cable with plug.
Electric cable 2 m

IP20

A440



Finishes
83/ _ _ Walnut (Tray)

Control
A440 83 / 00 On/ Off

Materials
Tray: Wood (Rustic Walnut).

Output: DC 5.0V 4.0 A.
Input: 100~240V 50/60Hz

Packaging
1 Box 0,350 x 0,350 x 0,090 m
Vol 0,0110 m³
Gross weight 1,2 Kg Net weight 0,750 Kg

Notes
Electric cable with plug.
Electric cable 2 m

IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



North

Design by Arik Levy

North features a base, stem, and shade that are disconnected from one another in a dynamic system of adjustable parts. Protruding arms hold triangular shades that direct the light where needed.

Floor




5605

max. 270 cm x max. 230 cm x max. 355 cm



5620


max. 447 cm x max. 325 cm x max. 425 cm

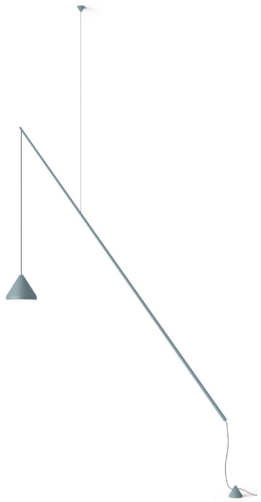

5666

max. 210 cm x max. 310 cm x max. 130 cm

5605



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 2538,0 lm

D

CRI >90

Control

5605 _ _ **/ 15** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

2 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


10 Boxes
Total Vol 0,35 m³
Gross weight 91 Kg Net weight 79,8 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 Dimmer

5620



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 3807 lm
D
CRI >90

Control

5620 _ _ **/ 15** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

3 x LED 9W 350mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


12 Boxes
Total Vol 0,36 m³
Gross weight 94,85 Kg Net weight 81,25 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 Dimmer

5666



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5666 _ _ **/** _ **5** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Counterweight: Aluminum.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes 0,24 x 0,217 x 0,21 m
Total Vol 0,0464 m³
Gross weight 6,2 Kg Net weight 4,05 Kg

Notes

Electric cable with plug.
Electric cable 2,5 m
Extra cable length.

LED IP20
Bi-volt Dimmer

Height-adjustable shade.



Adjustable-angle rods. Can be connected with or without plug.




1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Wall



5630
150 x 195 cm

5630



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
/2 _ 3000 K - 1123 lm
D
CRI >90
/3 _ 3500 K - 1374,9 lm
G
CRI >80

Control

5630 _ _ **/** _ **5** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Wall Plate: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,24 m³
Gross weight 11,05 Kg Net weight 5,85 Kg

Notes

Height-adjustable shade.
Push-button on the wall plate.
Can be connected with or without plug.
Electric cable 2,5 m

LED | IP20 | Dimmer | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Pendant

INDIVIDUAL MODEL



5660
Ø 16 x 200 cm




5662
Ø 40 x 200 cm



5664
Ø 60 x 200 cm



5670
Ø 16 x 200 cm



5672
Ø 40 x 200 cm




5674
Ø 60 x 200 cm

MULTIPLE MODELS














INDIVIDUAL MODEL

5660



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5660 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes

Extra cable length.

LED | IP20 | Bi-volt

5662



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5662 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,36 x 0,537 x 0,537 m
Vol 0,10 m³
Gross weight 4,8 Kg Net weight 2,25 Kg


Notes

Extra cable length.

LED | IP20 | Bi-volt

1160 | 10 | /1 | A | _18 | _ _
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

5664



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5664 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,32 x 0,727 x 0,727
Vol 0,17 m³
Gross weight 6,25 Kg Net weight 2,95 Kg

Notes

Extra cable length.

LED | IP20 | Bi-volt



Height-adjustable shade.



MULTIPLE MODELS

Select your model at **vibia.com** and adjust




2 x 5660



2 x 5660



3 x 5660/5662/5664




4 x 5664



4 x 5660



5 x 5660



6 x 5660



8 x 5664



8 x 5660



8 x 5660



10 x 5664



20 x 5662




24 x 5660




7 x 5660




9 x 5660



29 x 5660



10 x 5660



13 x 5660



5 x 5662

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500 N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
42 / _ _ Blue M1
(NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
D
CRI >90

/2 _ 3000 K
D
CRI >80

/3 _ 3500 K
G
CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5660 / 5662 / 5664

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling


_10
Surface




Ø 18 cm

match with fixture finish.


_18
Free Wire



Ø 20 cm



Ø 22 cm




Ø 36 cm




Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Shade: Aluminum
Diffuser: PMMA . Canopy: Steel.


Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5670



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
/2 _ 3000 K - 1123 lm
D
CRI >90 CRI >80
/3 _ 3500 K - 1374 lm
G
CRI >90

Control
5670 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials
Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,06 m³
Gross weight 5,75 Kg Net weight 2 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

5672



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
/2 _ 3000 K - 1123 lm
D
CRI >90 CRI >80
/3 _ 3500 K - 1374 lm
G
CRI >90

Control
5672 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials
Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.


Light Source and electronics
1 x LED 9W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,14 m³
Gross weight 8,25 Kg Net weight 3 Kg

Notes
Extra cable length.

LED IP20 Bi-volt

5674



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
/2 _ 3000 K - 1123 lm
D
CRI >90 CRI >80
/3 _ 3500 K - 1374 lm
G
CRI >90

Control
5674 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials
Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,21 m³
Gross weight 9,7 Kg Net weight 3,7 Kg

Notes
Extra cable length.

LED IP20 Bi-volt



Lily

Design by Ludovica+Roberto Palomba

The simplicity of Lily's refined silhouette makes this fixture ideal for an elegant interior with a relaxed ambience.
Its graceful glass diffuser radiates brings a sense of warmth and wellbeing.

Table Floor Pendant



5720
Ø 49 x 63,5 cm




5725
Ø 49 x 155 cm



5730
Ø 49 cm

5720



Finishes

11/ _ _ Black
(NCS S 8500-N)

25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

5720 _ _ / _ _

_ _ / 15 Push
_ _ / 1Y ProtoPixel*
_ _ / 1Z Casambi

Materials

Body: Steel.
Diffusser: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,59 x 0,68 x 0,54 m
Vol 0,21 m^3
Gross weight 10 Kg Net weight 5 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Electric cable 2,5 m.

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

5725



Finishes

11/ _ _ Black
(NCS S 8500-N)

25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

5725 _ _ / _ _

_ _ / 15 Push
_ _ / 1Y ProtoPixel*
_ _ / 1Z Casambi

Materials

Body: Steel.
Diffusser: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,57 x 0,49 x 0,49 m
Vol 0,277 m^3
Gross weight 14,2 Kg Net weight 8,20 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Electric cable 2,5 m.


LED IP20 Bi-volt





1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5730



Finishes

11/ _ _ Black
(NCS S 8500-N)

25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm
E

CRI >90

Control

5730 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Body: Aluminium.
Shade: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,2 W 900 mA
Constant Current 900mA
110~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,972 m³
Gross weight 6 Kg Net weight 2 Kg

Notes

Extra cable length.

LED | IP20 | Bi-volt

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5730

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling


_10
Surface




Ø 17,3 cm

match with fixture finish.

Remote



Built-in





Tempo

Design by Lievore, Altherr

The Tempo collection reclaims our collective memory of light, distilling lighting archetypes to their most basic forms. Vibia presents three designs in two sizes: the disc, the diamond and the milk glass oval - all inspired by the interplay of opacity, translucence and transparency.

Wall



5756 5757

122,5 x 80 cm



5758 5759

116,5 x 80 cm



5760 5761

120 x 80 cm



5762 5763

42,5 x 140 cm



5764 5765

36,5 x 140 cm



5766 5767

40 x 140 cm




Ref.
5757, 5759, 5761,5763, 5765, 5767.
Recessed dimmable driver.



Ref.
5756, 5758, 5760, 5762, 5764, 5766.
Push dimmer on the cable.
With plug.

Product specifications subject to change without notice. Please check vibia.com for updated information.

5756



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5756 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5757



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5757 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20
Ø 7,5 cm

5758



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5758 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes
Push dimmer on the cable. With plug (4 m).

LED IP20 Dimmer

5759



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5759 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes

Recessed dimmable driver (2,5 m)

LED IP20 Ø 7,5 cm

5760



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5760 _ _ **/ 15** Push

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes

Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5761



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5761 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg


Notes

Recessed dimmable driver (2,5 m)

LED IP20 Ø 7,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

5762



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5762 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,2 Kg Net weight 2 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5763



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5763 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,2 Kg Net weight 2 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 Ø 7,5 cm

5764



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5764 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,45 Kg Net weight 1,25 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5765



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5765 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,45 Kg Net weight 1,25 Kg

Notes
Recessed dimmable driver (2,5 m)

LED ☐ IP20 CE UK CA EAC

Ø 7,5 cm

5766



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5766 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 CE UK CA EAC Dimmer

5767



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5767 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes
Recessed dimmable driver (2,5 cm)


LED ☐ IP20 CE UK CA EAC

Ø 7,5 cm




Pendant

INDIVIDUAL MODEL

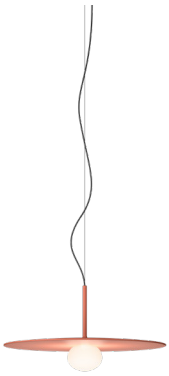

5776
Ø 40 cm




5770
Ø 25 cm



5778
Ø 24 cm



5772
Ø 13 cm

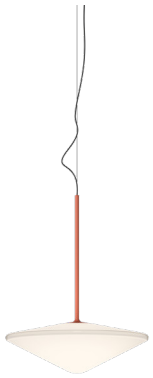


5780
Ø 34,5 cm




5774
Ø 20,5 cm


MULTIPLE MODELS









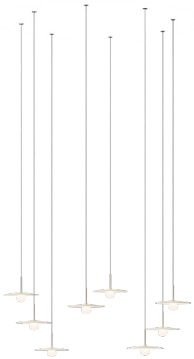




Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

5770



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E
CRI >90

Control

5770 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes

Extra cable length.

LED IP20 Bi-volt

5772



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E
CRI >90

Control

5772 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 1,8 Kg Net weight 1,2 Kg

Notes

Extra cable length.

LED IP20 Bi-volt

5774



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5774 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 2 Kg Net weight 1,4 Kg

Notes

Extra cable length.

LED | IP20 | Bi-volt

5776



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5776 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

Extra cable length.


LED | IP20 | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A | _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

5778



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5778 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,33 x 0,33 x 0,42 m
Vol 0,045 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes

Extra cable length.

LED | IP20 | CE | UKCA | EAC | Bi-volt

5780



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5780 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,23 m
Vol 0,038 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes

Extra cable length.

LED | IP20 | CE | UKCA | EAC | Bi-volt

MULTIPLE MODELS

Select your model at **vibia.com** and adjust



2 x 5774



3 x 5772



4 x 5770



4 x 5772




5 x 5774



8 x 5770



15 x 5772




8 x 5770




10 x 5774



20 x 5772



16 x 5774




3 x 5770



5 x 5774



6 x 5774




29 x 5774



10 x 5772



16 x 5774 From: 9.680,00 €



5 x 5774 From: 3.025,00 €



8 x 5774 From: 4.840,00 €

See more multiple models at **vibia.com**

Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K
CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5770, 5772, 5774

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10 Surface



Ø 16 cm

match with fixture finish.

_18 Free Wire



Ø 20 cm | Ø 36 cm | Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5778

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

_10 Surface



Ø 20 cm

match with fixture finish.

_18 Free Wire



Ø 20 cm
1-10V; DALI-2

Ø 22 cm
Casambi

Ø 36 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5776, 5780

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.


_10 Surface




Ø 20 cm

match with fixture finish.

Remote



Built-in



Materials

Diffuser: Blown-glass. LED support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Notes

Additional cable length from 2 m.

LED IP20 Bi-volt

Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

Ceiling



5920
Ø 40 cm



5915
Ø 55 cm



5926
Ø 90 cm



5905
101 x 88 cm



5910
106 x 90 cm




5922
178 x 149 cm



5924
186 x 149 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

5905



Finishes

10/ _ _ White
(NCS S 0300-N)

71/ _ _ White, Green L1, Off-White
(NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 5906 lm
E

/3 _ 3500 K - 6344 lm
F

CRI >90

Control

5905 _ _ **/** _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,75 x 0,45 x 0,25 m
Vol 0,0844 m³
Gross weight 17,15 Kg Net weight 15,38 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5910



Finishes

10/ _ _ White
(NCS S 0300-N)

72/ _ _ White, Green L1
(NCS S 0300-N, NCS S 4005-G80Y)

73/ _ _ White, Off-White
(NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 4430 lm
E

/3 _ 3500 K - 4758 lm
F

CRI >90

Control

5910 _ _ **/** _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,80 x 0,70 x 0,30 m
Vol 0,1680 m³
Gross weight 11,90 Kg Net weight 9,10 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5915



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 2953 lm
E

/3 _ 3500 K - 3172 lm
F

CRI >90

Control

5915 10 / _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,65 x 0,65 x 0,25 m
Vol 0,0106 m³
Gross weight 6,80 Kg Net weight 4,73 Kg

Notes

* Electrical connection point

LED IP20 Dimmer Bi-volt

5920



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **13/** _ _ Off-White (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5920 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.


Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,45 x 0,45 x 0,25 m
Vol 0,0051 m³
Gross weight 3,10 Kg Net weight 1,91 Kg

Notes
* Electrical connection point

LED IP20 Dimmer Bi-volt

5922



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **71/** _ _ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature
/1 _ 2700 K - 13920 lm
/3 _ 3500 K - 14951 lm
D
CRI >90

Control
5922 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.


Light Source and electronics
4 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 1,35 x 1,20 x 0,30 m
Vol 0,0486 m³
Gross weight 26,60 Kg Net weight 19,98 Kg

Notes
* Electrical connection point

LED IP20 Dimmer

5924



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **72/** _ _ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- **73/** _ _ White, Off-White (NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature
/1 _ 2700 K - 9897 lm
D
/3 _ 3500 K - 10630 lm
E
CRI >90

Control
5924 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.


Light Source and electronics
3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 1,45 x 1,10 x 0,25 m
Vol 0,0399 m³
Gross weight 27 Kg Net weight 20,80 Kg

Notes
* Electrical connection point

LED IP20 Dimmer

5926



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 6598 lm
D

/3 _ 3500 K - 7086 lm
E

CRI >90

Control

5926 10 / _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1,05 x 1,05 x 0,25 m
Vol 0,0276 m^3
Gross weight 14,60 Kg Net weight 10,08 Kg

Notes

* Electrical connection point

LED IP20 Dimmer



Pendant

INDIVIDUAL MODEL



5930
Ø 90 cm





5935
Ø 40 cm




5940
Ø 55 cm


MULTIPLE MODELS















INDIVIDUAL MODEL

5930

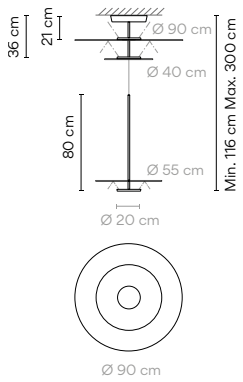

Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9897 lm
D
/3 _ 3500 K - 10630 lm
E
CRI >90

Control
5930 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.


Light Source and electronics
3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,96x0,96x0,50 m
Vol 0,4608 m³
Gross weight 27,9 Kg Net weight 22 Kg

Notes
Adjust the height on installation

LED IP20 Dimmer

5935



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5935 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.


Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,13 x 0,71 m
Vol 0,0655 m³
Gross weight 6,10 Kg Net weight 5 Kg

Notes
Extra cable length.

LED IP20 Dimmer Bi-volt

5940



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5940 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,13 x 0,71 m
Vol 0,0665 m³
Gross weight 7 Kg Net weight 6 Kg

Notes
Extra cable length.


LED IP20 Dimmer Bi-volt

MULTIPLE MODELS


Select your model at **vibia.com** and adjust



2 x 5935




2 x 5935



3 x 5935



3 x 5935




4 x 5935




4 x 5935




4 x 5935



5 x 5935




8 x 5935



8 x 5935




9 x 5935



9 x 5935



18 x 5935



16 x 5935

See more multiple models at **vibia.com**

Finishes

13/ _ _ Off-White
(NCS S 1000-N)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5935

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling


_10
Surface



Ø 16,7 cm

match with fixture finish.

_18
Free Wire

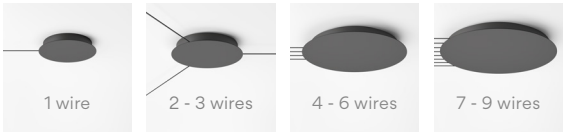

Ø 20 cm

Ø 22 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5940_ _ / _ 1 / _ B

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16,7 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm

Ø 22 cm

Ø 36 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5940_ _ / _ Z

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_18
Free Wire




Ø 20 cm

Ø 22 cm


Ø 36 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Shade: Aluminum Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum

Notes

Additional cable length
from 2 m.

LED IP20 Dimmer Bi-volt


Floor



5945
76 x 64 x 90 cm



5950
Ø 55 x 43 cm




5955
46 x 25 x 100 cm



5957
48 x 35 x 96 cm

5945



Finishes
13/ _ _ Off-White
(NCS S 1000-N)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1365 lm
/3 _ 3500 K - 1467 lm
F
CRI >90

Control
5945 _ _ **/** _ **5** Push
(with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.


Light Source and electronics
2 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,65 x 1,00 x 0,25 m
Vol 0,0163 m³
Gross weight 15,85 Kg Net weight 15,25 Kg

Notes
Electric cable 2 m

LED □ IP20 CE UK CA EAC Dimmer Bi-volt

5950



Finishes
10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature
/1 _ 2700 K - 682 lm
/3 _ 3500 K - 733 lm
F
CRI >90

Control
5950 10 / _ **5** Push
(with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz


Packaging
1 Box 0,65 x 0,65 x 0,20 m
Vol 0,0085 m³
Gross weight 14,60 Kg Net weight 12,71 Kg

Notes
Electric cable 2 m

LED □ IP20 CE UK CA EAC Dimmer Bi-volt



5955



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
/3 _ 3500 K - 733 lm
F
CRI >90

Control
5955 _ _ **/** _ **5** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.


Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,30 x 1,10 x 0,10 m
Vol 0,0033 m³
Gross weight 4,80 Kg Net weight 3,50 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Bi-volt

5957



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
/3 _ 3500 K - 733 lm
F
CRI >90

Control
5957 _ _ **/** _ **5** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,40 x 1,10 x 0,10 m
Vol 0,0044 m³
Gross weight 6,10 Kg Net weight 4,46 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Bi-volt

Table



5965
35 x Ø 30 x 16 cm



5970
29 x 17 x 30 cm




5972
11 x 30 cm

Bolt-down





5965



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
F
CRI >90

Control
5965 _ _ **/15** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.


Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,50 x 0,50 x 0,7 m
Vol 0,0018 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes
Electric cable 2 m

LED IP20 Dimmer Bi-volt

5970



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
F
CRI >90

Control
5970 _ _ **/15** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.


Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,20 x 0,40 x 0,07 m
Vol 0,0072 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes
Electric cable 2 m

LED IP20 Dimmer Bi-volt

5972



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
F
CRI >90

Control
5972 _ _ **/15** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,15 x 0,13 x 0,36 m
Vol 0,00702 m³
Gross weight 0,9 Kg Net weight 0,6 Kg

Notes
Electric cable 2 m

LED IP20 Dimmer


Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

Ceiling Wall



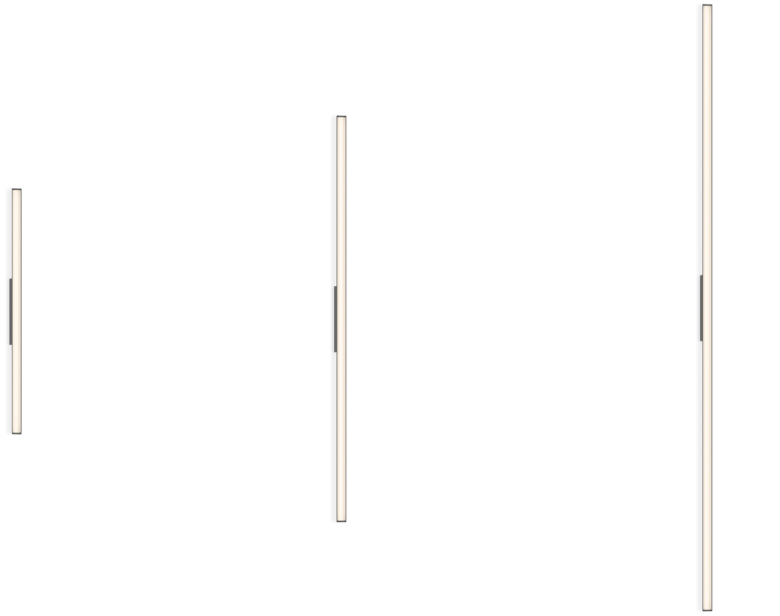

5975
121 x 4,7 x 6,5 cm

5977
201 x 4,7 x 6,5 cm

5979
301 x 4,7 x 6,5 cm




5981
253 x 4,8 x 6,6 cm

5983
413 x 4,8 x 6,6 cm

5985
613 x 4,8 x 6,6 cm

5975



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1560 lm
/3 _ 3500 K - 1290 lm
E
CRI >90

Control
5975 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** _ **30** Casambi (Remote)


Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 Dimmer

5977



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2560 lm
/3 _ 3500 K - 3360 lm
E
CRI >90

Control
5977 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** _ **30** Casambi (Remote)


Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6

LED IP44 Dimmer

5979



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 3840 lm
/3 _ 3500 K - 5040 lm
E
CRI >90

Control
5979 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** _ **30** Casambi (Remote)


Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

LED IP44 Dimmer

5981



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3120 lm
/3 _ 3500 K - 3840 lm

E

CRI >90

Control

5981 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


2 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,030 m³
Gross weight 5,8 Kg Net weight 2,8 Kg

LED IP44 Dimmer

5983



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 5120 lm
/3 _ 3500 K - 6720 lm

E

CRI >90

Control

5983 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


2 x LED STRIP 21,6 W 600 mA
Constant Current 1200 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,046 m³
Gross weight 9,4 Kg Net weight 4,8 Kg

LED IP44 Dimmer

5985



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 7680 lm
/3 _ 3500 K - 10080 lm

E

CRI >90

Control

5985 _ _ **/** _ _

_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **3** _ **30**	1-10V (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA..

Light Source and electronics

2 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA Remote
220~240V 50/60Hz


Packaging

2 Boxes
Total Vol 0,066 m³
Gross weight 13,5 Kg Net weight 6,9 Kg

LED IP44 Dimmer


Product specifications subject to change without notice. Please check vibia.com for updated information.

Wall Vanity light






5987
L 121 cm




5989
L 201 cm

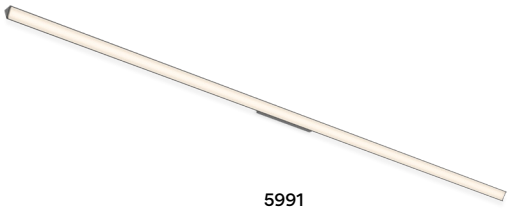

5991
L 301 cm

5987



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1560 lm
/3 _ 3500 K - 1920 lm
E
CRI >90

Control
5987 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **Z** _ **30** Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.


Light Source and electronics
1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

Notes
Central canopy with module LED inclined 30°

LED IP44 Dimmer

5989



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2560 lm
/3 _ 3500 K - 3360 lm
E
CRI >90

Control
5989 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **Z** _ **30** Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.


Light Source and electronics
1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

Notes
Central canopy with module LED inclined 30°

LED IP44 Dimmer

5991



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3840 lm
/3 _ 3500 K - 5040 lm

E

CRI >90

Control

5991 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m^3
Gross weight 6,9 Kg Net weight 3,6 Kg

Notes

Central canopy with module LED inclined 30°

LED IP44 Dimmer



Product specifications subject to change without notice. Please check vibia.com for updated information.

Vertical Wall






5993
6,6 x 4,7 x 132 cm



5995
6,6 x 4,7 x 212 cm

5993



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1560 lm
/3 _ 3500 K - 1920 lm
E
CRI >90

Control
5993 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)


Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 10,8W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 Dimmer

5995



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2560 lm
/3 _ 3500 K - 3360 lm
E
CRI >90

Control
5995 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

LED IP44 Dimmer

Suite

Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

Floor Table



6006
46 x 46 x 133 cm



6007
46 x 46 x 133 cm




6011
46 x 39 x 97 cm



6012
46 x 39 x 112 cm

6006



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1539 lm
F

CRI >90

Control

6006 _ _ **/15** Push (with or without memory)

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics

8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m^3
Gross weight 34,3 Kg Net weight 16,7 Kg


Notes

Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m.

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6007



Finishes
14/ _ _ Chocolate (RAL 8019)
23/ _ _ Warm White (NCS S 0502-Y50R)
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1539 lm
F
CRI >90

Control
6007 _ _ **/15** Push (with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.


Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m³
Gross weight 34,3 Kg Net weight 17 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m.

LED IP20 Dimmer

6011



Finishes
14/ _ _ Chocolate (RAL 8019)
23/ _ _ Warm White (NCS S 0502-Y50R)
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 790 lm
F
CRI >90

Control
6011 _ _ **/15** Push (with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.


Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 32,4 Kg Net weight 15,7 Kg

Notes
Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m

LED IP20 Dimmer

6012



Finishes
14/ _ _ Chocolate (RAL 8019)
23/ _ _ Warm White (NCS S 0502-Y50R)
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1275 lm
F
CRI >90

Control
6012 _ _ **/15** Push (with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 33,6 Kg Net weight 16 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m

LED IP20 Dimmer

Wall

6040
32 x 14 x 16 cm

6041
32 x 14 x 16 cm




6045
32 x 29 x 16 cm



6046
32 x 29 x 16 cm

6040



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90
/3 _ 3500 K - 184 lm
F
CRI >80

Control
6040 _ **/** _ **0** On/ Off


Materials
Shelf: Aluminum.
Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50Hz

Packaging
1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,6 Kg Net weight 1,6 Kg

LED IP20

6041



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90
/3 _ 3500 K - 184 lm
F
CRI >80

Control
6041 _ _ **/** _ **0** On/ Off

Materials
Shelf: Aluminum.
Diffuser: Blown-glass.
Lid: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,6 Kg Net weight 1,6 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

6045



Finishes

14/ _ _ Chocolate
(RAL 8019)

23/ _ _ Warm White
(NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 616 lm
E
CRI >90

/3 _ 3500 K - 184 lm
F
CRI >80

Control

6045 _ _ **/** _ **0** On/ Off

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Lid: Steel.

Light Source and electronics

1 x LED STRIP 24V 1,63W.
1 x LED 4,5W 350mA.
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging


1 Box 0,29 x 0,38 x 0,38 m
Vol 0,418 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

Notes

Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.

LED IP20 CE UK CA EAC

6046



Finishes

14/ _ _ Chocolate
(RAL 8019)

23/ _ _ Warm White
(NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 616 lm
E
CRI >90

/3 _ 3500 K - 184 lm
F
CRI >80

Control

6046 _ _ **/** _ **0** On/ Off

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Lid: Steel.

Light Source and electronics

1 x LED STRIP 24V 1,63W.
1 x LED 4,5W 350mA.
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,418 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

Notes

Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.


LED IP20 CE UK CA EAC

Wall

6050

12 x 12 x 10 cm

6050



Finishes

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

/1 _ 2700 K - 485 lm
E
CRI >90

Control

6050 23 / 10 On/ Off

Materials

Wall support: Aluminum.
Diffuser: Blown-glass

Light Source and electronics

1 x LED 4,5W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,21 m
Vol 0,00055 m³
Gross weight 0,6 Kg Net weight 0,4 Kg

LED IP20 CE UK CA EAC

Tube Free


Design by Ichiro Iwasaki

With the Tube ceiling collection, Ichiro Iwasaki endeavours to create a lighting system capable of forming distinctive expressions by reconfiguring the different constituent parts. By combining three different diameter shades, six colour tones and a rhythm of differing heights, Tube creates a unique landscape of luminaires overhead.

Ceiling

Built-in

6095
Ø 22 cm




6100
Ø 28,5 cm



6105
Ø 41 cm



6095



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N
- **10/** _ _ White (NCS S 0300-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6095 _ _ / _ _

_ _ / _ **A** _ **32**	Push; 1-10V; DALI-2 (Remote)
_ _ / _ **Z** _ **32**	Casambi (Remote)

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: ABS.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz


Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,017576 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

6100



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N
- **10/** _ _ White (NCS S 0300-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1476 lm
E
/2 _ 3000 K - 1521 lm
/3 _ 3500 K - 1550 lm
F
CRI >90

Control

6100 _ _ **/** _ **A** Push; 1-10V;
DALI-2

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics


2700 K - 3000 K - 3500K:
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,40 x 0,40 x 0,35 m
Vol 0,056 m³
Gross weight 4,5 Kg Net weight 2,5 Kg

LED IP20 Bi-volt

6105



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N
- **10/** _ _ White (NCS S 0300-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2413 lm
/2 _ 3000 K - 2485 lm
/3 _ 3500 K - 2533 lm
E
CRI >90

Control

6105 _ _ **/** _ **A** Push; 1-10V;
DALI-2

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 20 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,40 m
Vol 0,144 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 Bi-volt

Pendant

INDIVIDUAL MODEL



6160
Ø 22 cm


6165
Ø 28,5 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

6160



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6160 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging


Total Vol 0,04 m3
Gross weight 4,40 Kg Net weight 2,15 Kg

Notes

Extra cable length.

LED IP20 Bi-volt

6165



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6165 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,40 Kg Net weight 2,15 Kg


Notes

Extra cable length.

LED IP20 Bi-volt

MULTIPLE MODELS


Select your model at **vibia.com** and adjust



2 x 6160



2 x 6165 + 1 x 6160



4 x 6165



4 x 6160




5 x 6165



7 x 6165



8 x 6160




8 x 6165



10 x 6160



19 x 6160



24 x 6165




3 x 6165



5 x 6165



6 x 6165



29 x 6160



10 x 6160



16 x 6160



5 x 6165



8 x 6160

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White
(NCS S 0300-N)
15/ _ _ Grey L2
(NCS S 2500-N
16/ _ _ Grey M1
(NCS S 4500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 6160, 6165

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling


_10
Surface



Ø 16,8 cm

match with fixture finish.

_18
Free Wire

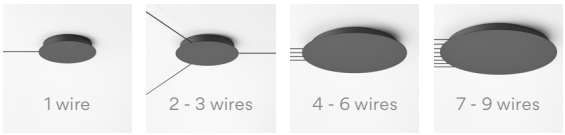

Ø 20 cm


Ø 22 cmv

Ø 36 cm


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Notes

Additional cable length from 2 m.

LED IP20 Bi-volt

Plusminus

Design by Diez Office

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.






Easy to design and install


Compose a personalised Plusminus at **vibia.com**

From scratch

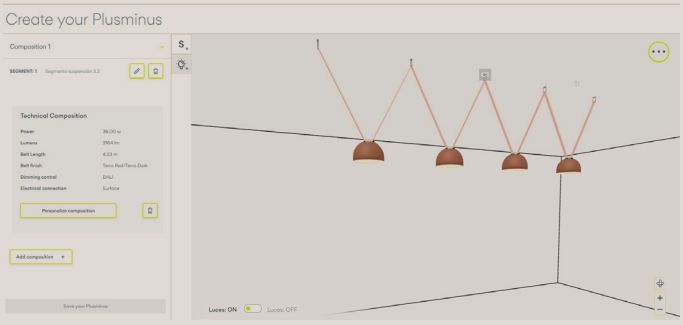

+ Create and compose projects in detail.
+ Draw and customise in 3D to see it in space.
+ Or customise it step by step without drawing.

From a layout

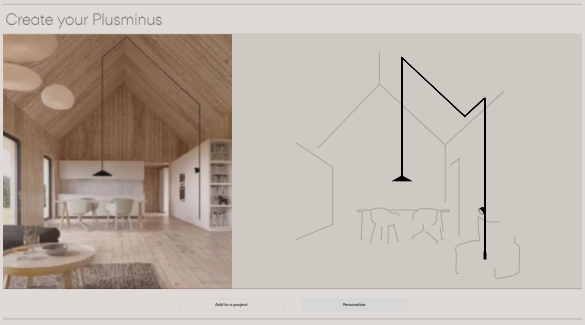


+ Customise and adapt it to the needs of your project.
+ Add it to your project and edit it at any time.
+ More than 100 creations for you.

Product specifications subject to change without notice. Please check vibia.com for updated information.





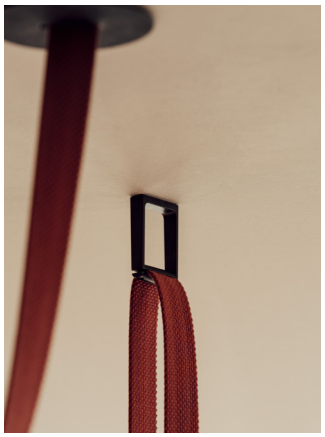


Easy connection
Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

Luminaire types and lighting effects



Sphere



Volumetric Diffuser
distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere.
The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere



Hidden Diffuser
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



Cone




Hidden Diffuser
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight



Flat diffuser
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



Accent light
emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.






Linear Diffuser



General lighting
provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.

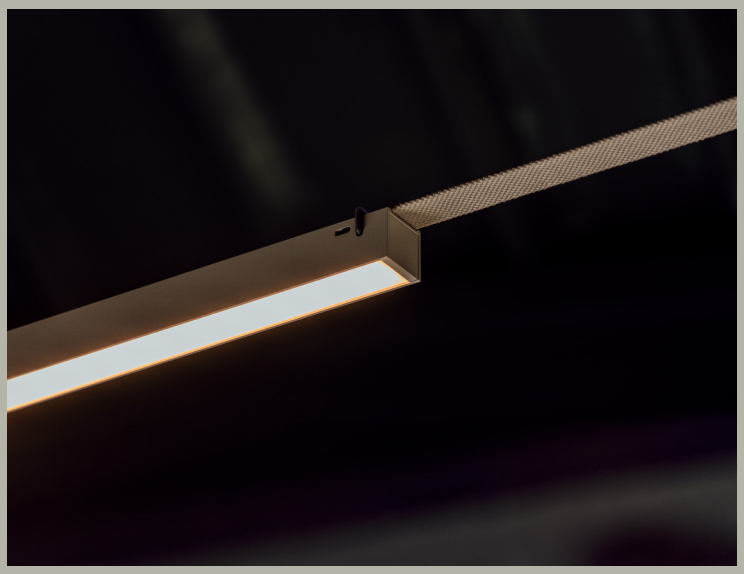

Linear Low UGR



Linear High Efficiency Low Glare
offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

Linear High Comfort Low Glare
provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.





Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website **vibia.com**

Sphere



6230


Ø 20 cm



6235

Ø 30 cm

6230



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm

E

CRI >90

Control

6230 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics


1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg

LED IP20 Bi-volt Dimmer

6235



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6235 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg

LED IP20 Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Semisphere




6220
Ø 20 cm



6225
Ø 30 cm

6220



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
- **/1** _ 2700 K - 846 lm
- **/2** _ 3000 K - 884 lm
- **/3** _ 3500 K - 916 lm

E

CRI >90

Control
6220 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)


Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 Bi-volt Dimmer

6225



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
- **/1** _ 2700 K - 1492 lm
- **/2** _ 3000 K - 1569 lm
- **/3** _ 3500 K - 1606 lm

F

CRI >90

Control
6225 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 Bi-volt Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website **vibia.com**

Cone



6240


Ø 60 cm



6245

Ø 80 cm

6240



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6240 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics


1 x LED 16 W 850 mA

Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg

LED IP20 Bi-volt Dimmer

6245



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6245 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg

LED IP20 Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm




Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200
Narrow



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6200 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)


Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Bi-volt Dimmer

6205
Medium



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6205 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA


Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Bi-volt Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website **vibia.com**

6210
Wide



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm

E

CRI >90

Control

6210 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics


1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Bi-volt Dimmer

6215
Flat Diffuser



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 491 lm
/2 _ 3000 K - 513 lm
/3 _ 3500 K - 532 lm

E

CRI >90

Control

6215 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics



1 x LED 4,2 W 250 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Bi-volt Dimmer

Spotlight - Accent

Narrow	Medium	Wide
		
15°	33°	49°
ø 0,2 m	ø 0,69 m	ø 0,9 m
Ø 0,4 m	Ø 1,37 m	Ø 1,8 m
ø 0,2 m 1240 lx	ø 0,69 m 851 lx	ø 0,9 m 307 lx
Ø 0,4 m 310 lx	Ø 1,37 m 213 lx	Ø 1,8 m 77 lx

H = 1,5 m


H = 3 m

Spot Accent Light




Spot Flat Diffuser



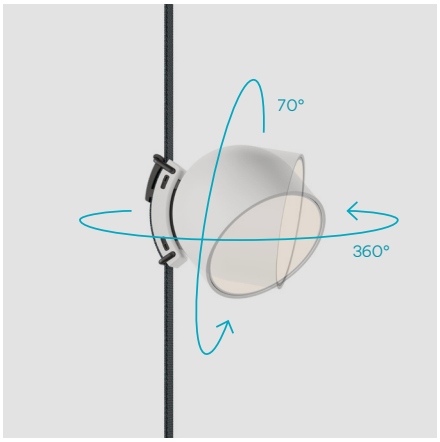


Product specifications subject to change without notice. Please check vibia.com for updated information.

Linear diffuser

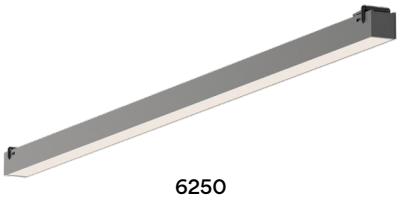


6250
102 x 4 x 3 cm

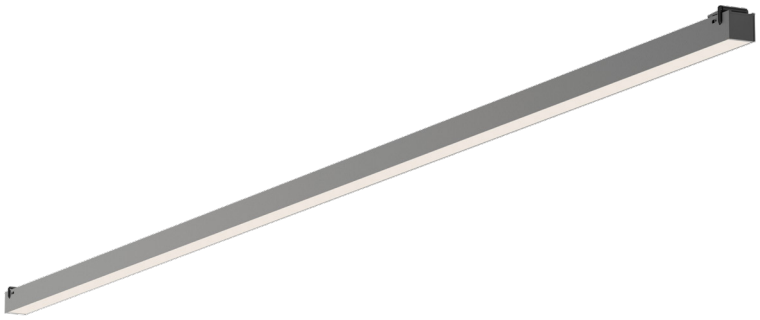

6255
202 x 4 x 3 cm

6250



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm
C
CRI >90

Control
6250 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)


Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging
1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 Bi-volt Dimmer

6255



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm
D
CRI >90

Control
6255 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 41,3 W 24 V


Packaging
1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 Bi-volt Dimmer


Linear Low UGR - High-Comfort




6260
26,8 x 7 x 3 cm




6265
52,5 x 7 x 3 cm

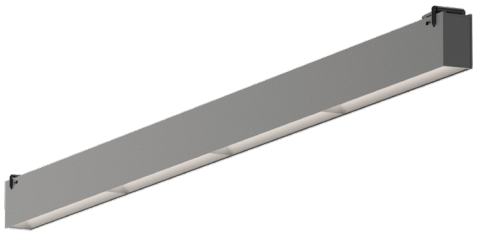

6270
103,7 x 7 x 3 cm



6260



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1281 lm
/2 _ 3000 K - 1323 lm
/3 _ 3500 K - 1366 lm
D
CRI >90

Control

6260 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 Bi-volt Dimmer

6265



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2562 lm
/2 _ 3000 K - 2647 lm
/3 _ 3500 K - 2731 lm
D
CRI >90

Control

6265 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 Bi-volt Dimmer

6270



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5124 lm
/2 _ 3000 K - 5293 lm
/3 _ 3500 K - 5462 lm
D
CRI >90

Control

6270 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging


1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes


UGR <19

LED IP20 Bi-volt Dimmer


Linear Low UGR - High-Efficiency




6275
26,8 x 7 x 3 cm




6280
52,5 x 7 x 3 cm

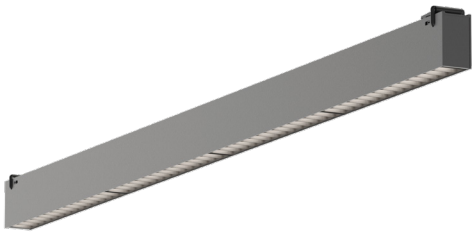

6285
103,7 x 7 x 3 cm



6275



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1281 lm
/2 _ 3000 K - 1323 lm
/3 _ 3500 K - 1366 lm
D
CRI >90

Control

6275 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg


Notes

UGR <19

LED IP20 Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6280



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2562 lm
/2 _ 3000 K - 2647 lm
/3 _ 3500 K - 2731 lm
D
CRI >90

Control

6280 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 Bi-volt Dimmer

6285



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5124 lm
/2 _ 3000 K - 5293 lm
/3 _ 3500 K - 5462 lm
D
CRI >90

Control

6285 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 Bi-volt Dimmer

Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.





 Product specifications subject to change without notice. Please check vibia.com for updated information.

Installation accessories


You will receive a personalised accessories toolbox per every composition made at **vibia.com.** The Toolbox includes some extra units for on-site adjustments.



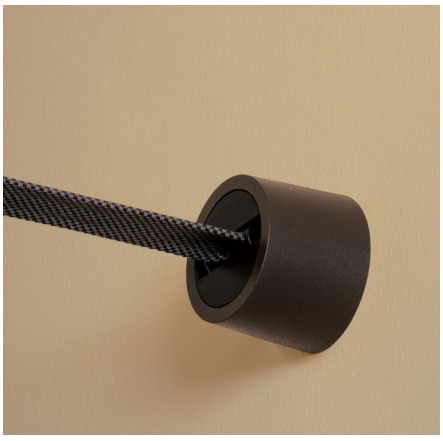

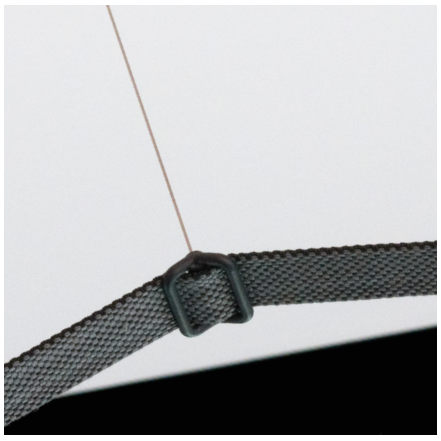


Belt terminations options



B3
Belt End Cap




B4
Double End Cap




B5
Pendant End Cap


Fasten accessories options



F1
Circular Ratchet




F2
Circular Anchor



F3
Belt Support



F4
Counterweight



F5
Corner Support




F6
Freestyle Bar
2 m. bar length
5 m. maximum tensor cable


Tension clips options




T1
Suspension Clip



T2
V-Tension Clip




T3
Parallel Tension Clip S



T4
Parallel Tension Clip M



T5
Cable End Cap



T6
Pendant Cable S



T7
Pendant Cable M

Materials
Counterweight: Cast iron

Finishes
11 Black (NCS S 0300-N)

Electrical connection options

Choose your preferred installation option according to your needs.



Surface



Built-in



Remote


Built-in



Surface



Plug



Optional wire connector

Dimming control options


Choose your preferred installation option according to your needs.


Dimming Control	**Electrical Connection**			
	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	–	–	–	✓
Push Simultaneous	✓	✓	✓	–
1-10V Simultaneous	✓	✓	✓	–
DALI Simultaneous	✓	✓	✓	–
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓
ProtoPixel Simultaneous	✓	✓	✓	✓
ProtoPixel integrated on each individual luminaire (P2P)	✓	✓	✓	✓

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Belt Options Surface Canopy

Choose your preferred installation option according to your needs.

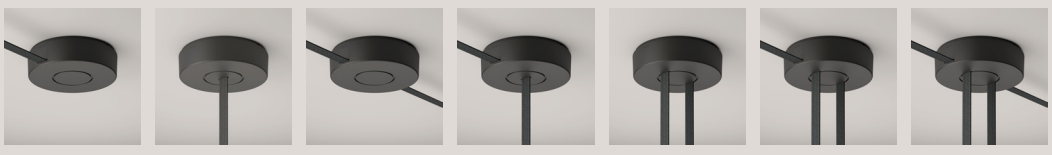



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)

Notes
*Available from January 2025.

IP20 Bi-volt Dimmer



Surface Canopy M
E2 Ø 260 mm.

Wattage options:
>60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)

Notes
*Available from January 2025.

IP20 Bi-volt Dimmer



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).


Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)

Notes
*Available from January 2025.

25/40/60W
IP20 Bi-volt Dimmer

120/240W
IP20 Bi-volt Dimmer



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).


Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)

Notes
*Available from January 2025.

25/40/60W
IP20 Bi-volt Dimmer

120/240W
IP20 Bi-volt Dimmer



Remote Surface Canopy
E5 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).


Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)

Notes
*Available from January 2025.

25/40/60W
IP20 Bi-volt Dimmer

120/240W
IP20 Bi-volt Dimmer



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Push.
Simultaneous line Casambi; ProtoPixel*.
Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 Bi-volt Dimmer

Notes
*Available from January 2025.



Wire Connector
E8 Ø 3,1 mm.

Wattage options:
< 60W.

Wire connector
E8 Ø 5,8 mm.

Wattage options:
< 60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.

11 Black
(NCS S 8500-N)

IP20


Belt


Maximum 60 metres per electrical connection, belt length personalised for each composition on **www.vibia.com**

Finishes
Black
Terra Red
Blue
Green
Beige

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

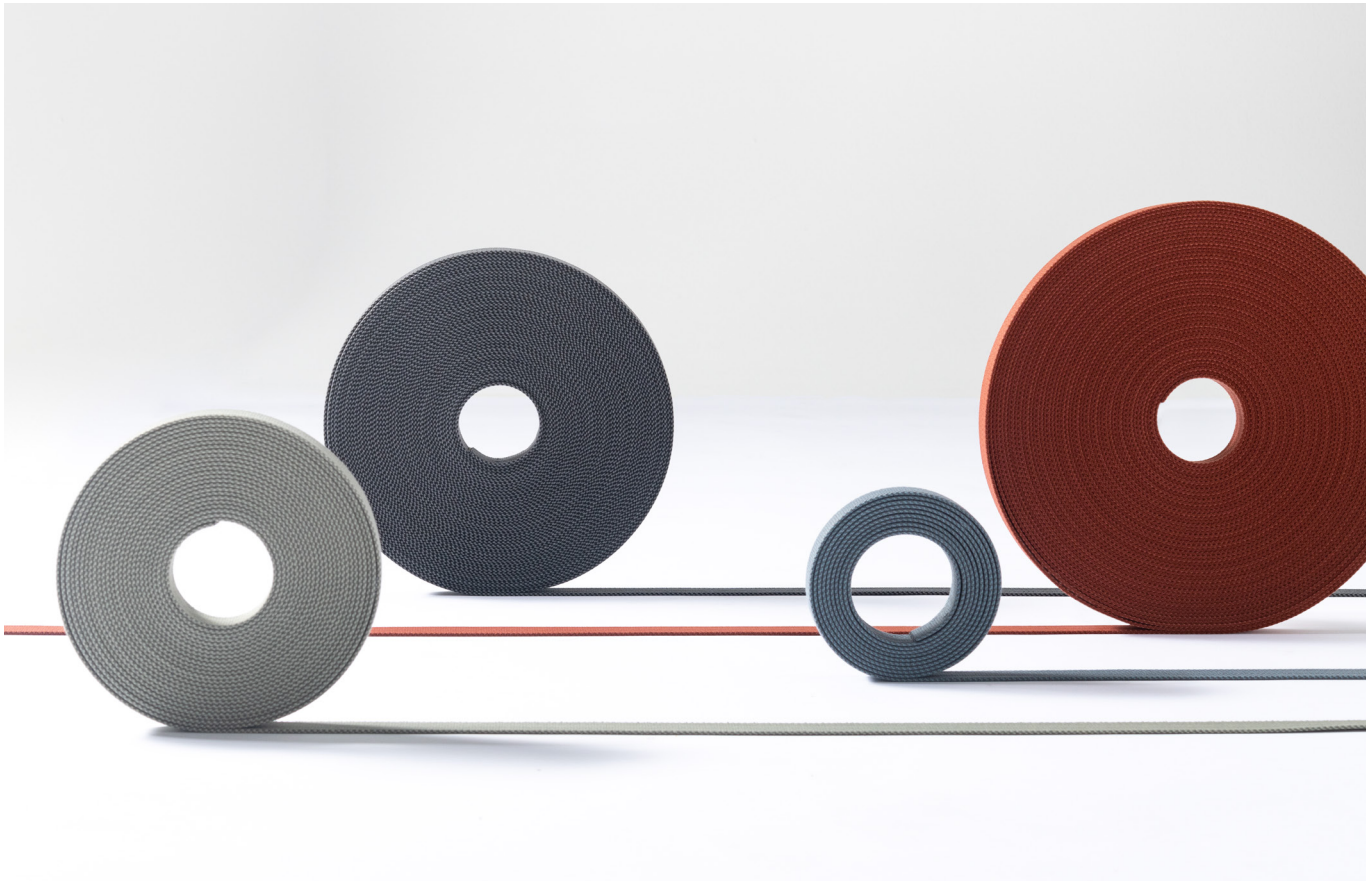

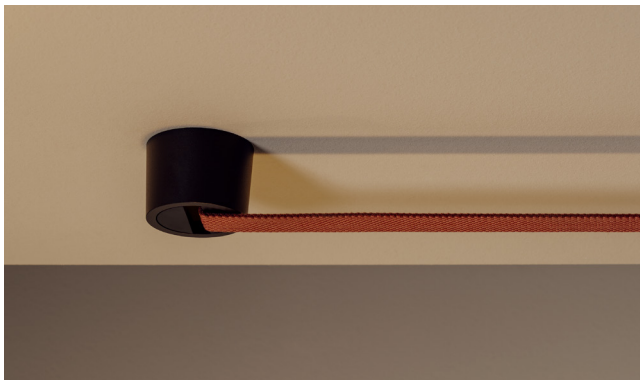


The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

Belt terminations

Belt terminations can be adjusted during the installation process according to your preference.





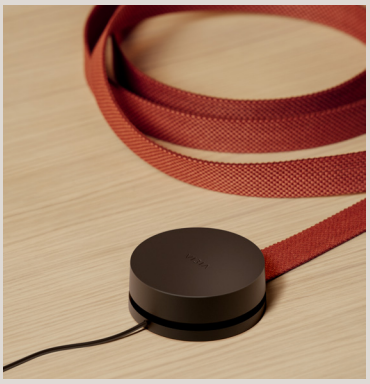






Composition examples for orientative prices


The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.

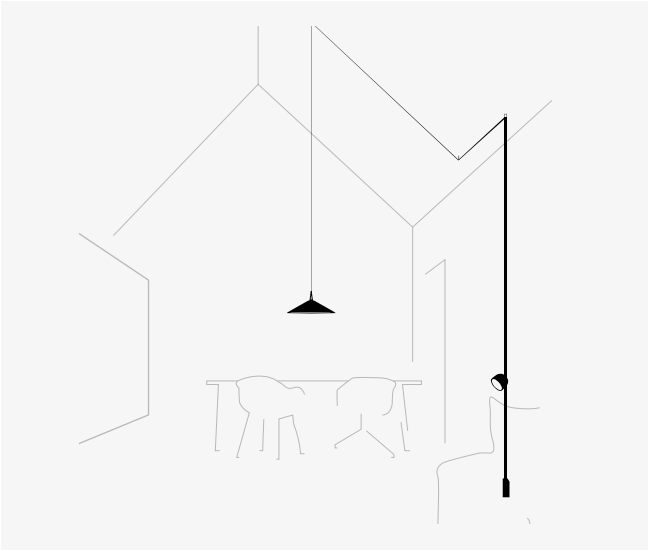Composition examples for orientative prices




Sketch composed by one composition.

2 luminaires: Cone 6240, Spotlight 6215.

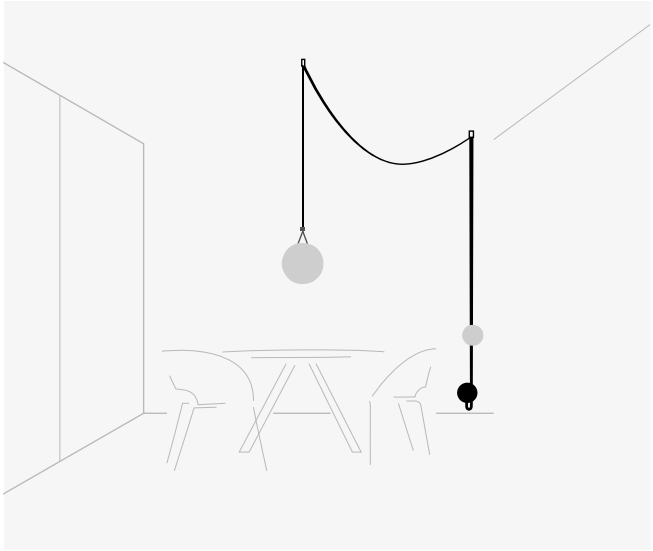


Sketch composed by one composition.

2 luminaires: Sphere 6230, Sphere 6235.

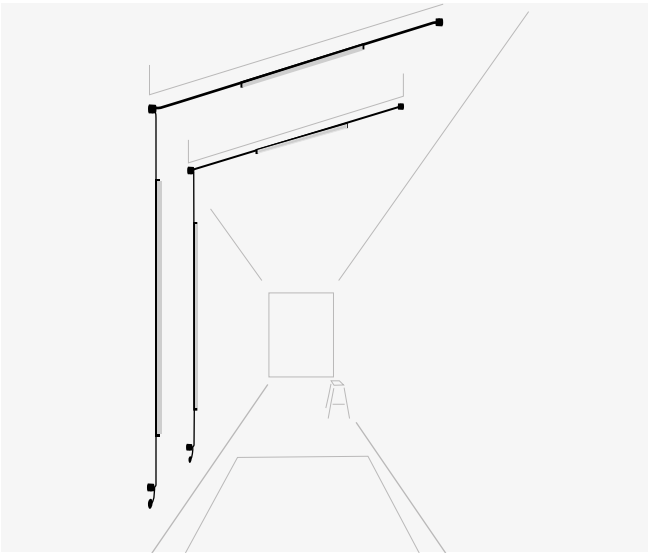

Sketch composed by two identical compositions.

2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.

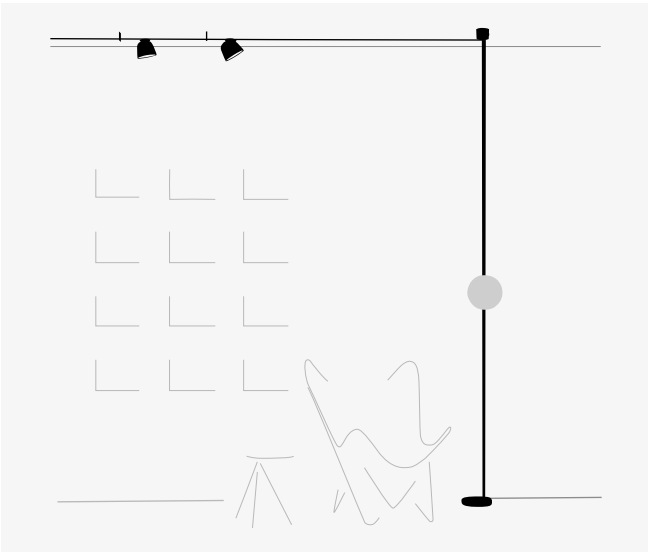


Sketch composed by one composition.

3 luminaires: Spotlight 6205 x 2, Sphere 6230.




Sketch composed by one composition.

1 luminaire: Sphere 6230.

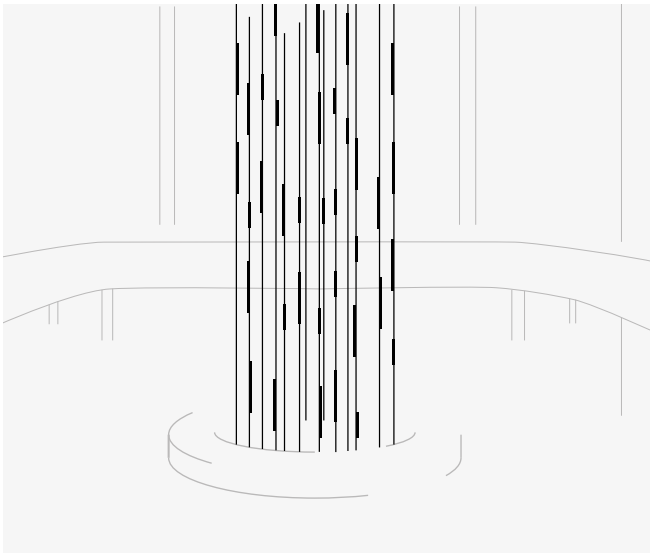


Sketch composed by several compostions.

3 luminaires: Linear Diffuser 6255.

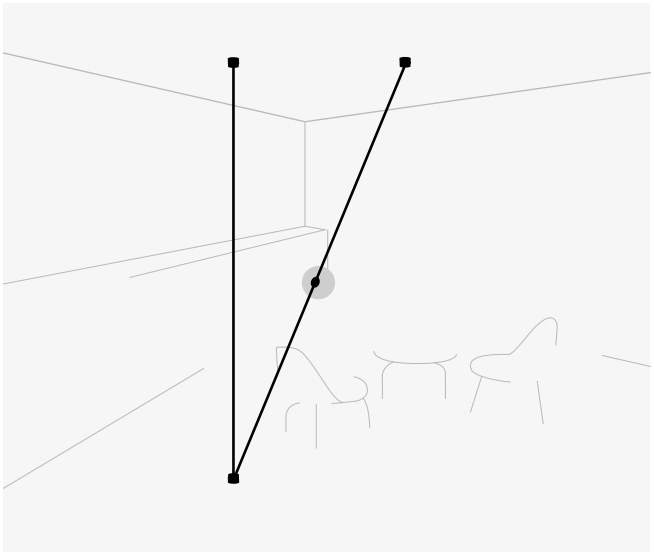

Sketch composed by one composition.


1 luminaire: Sphere 6230.

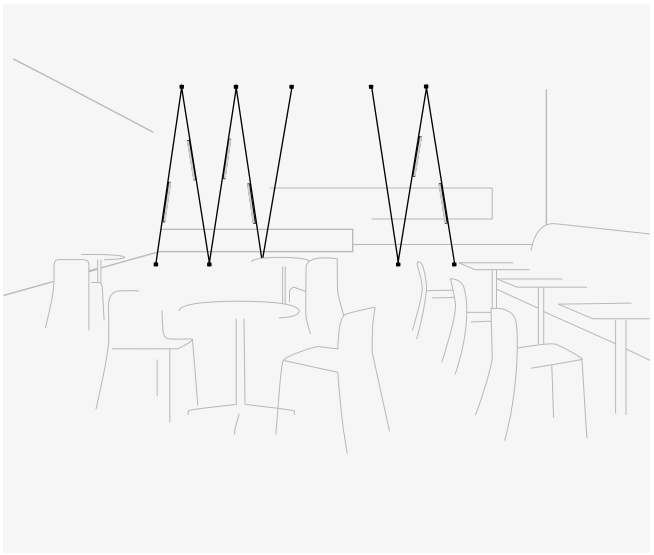

Sketch composed by two compositions.


2 luminaires: Linear Diffuser 6250.

Composition examples for orientative prices

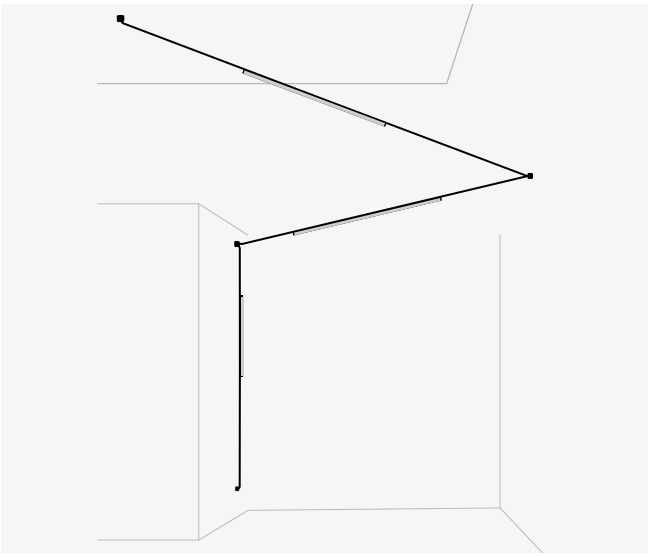


Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.

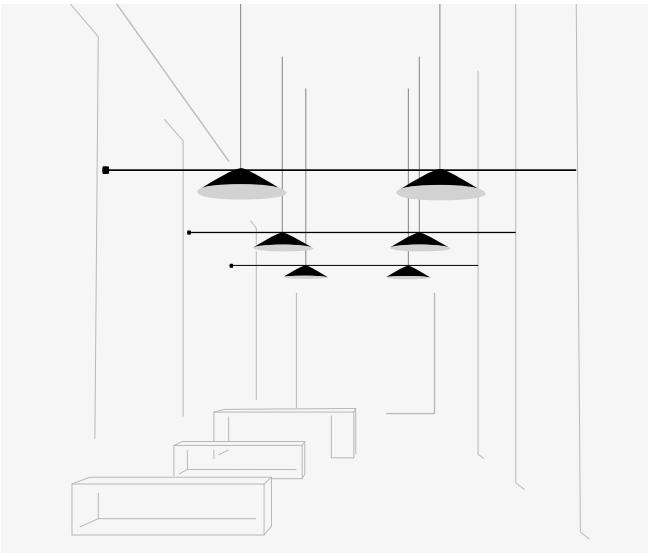


Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.

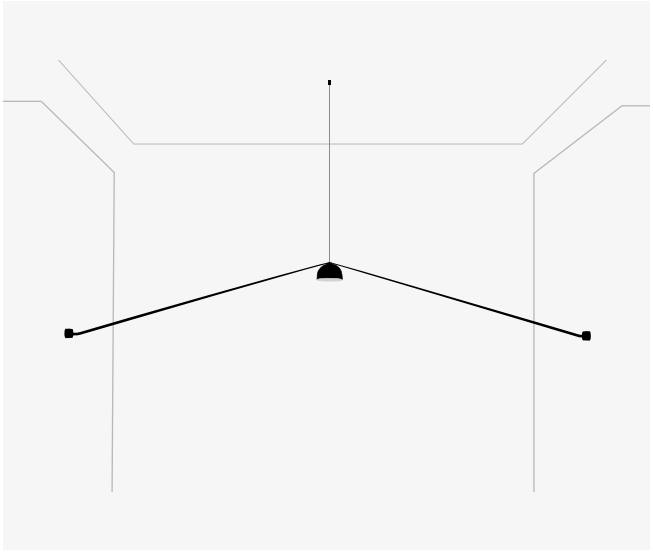


Sketch composed by one composition.

1 luminaire: Semisphere 6225.

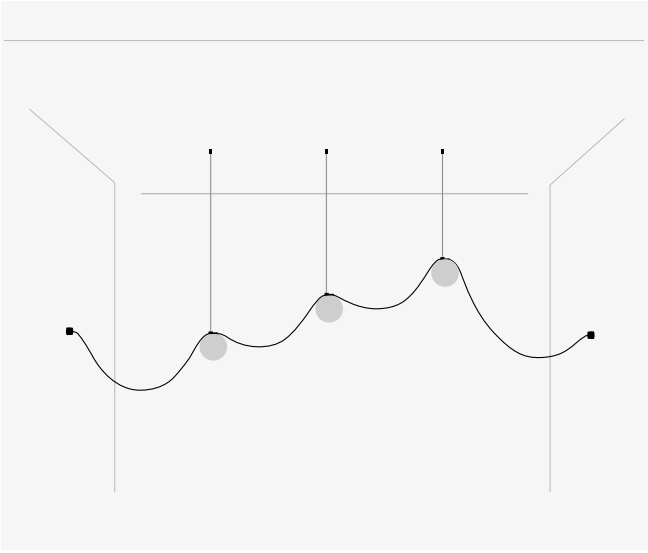


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

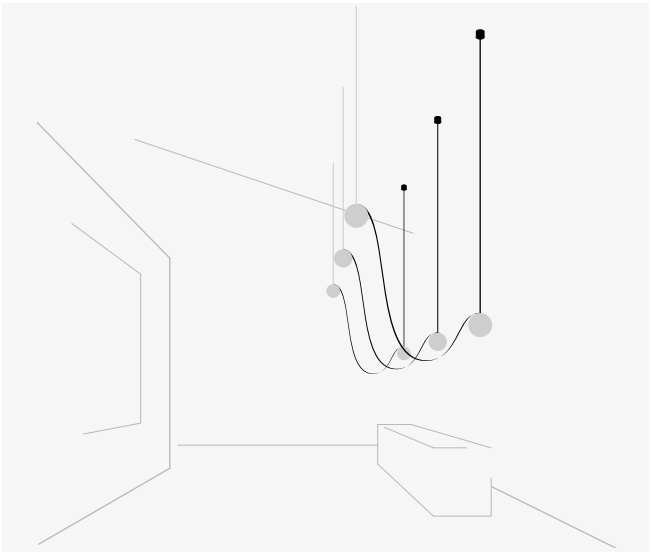


Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.

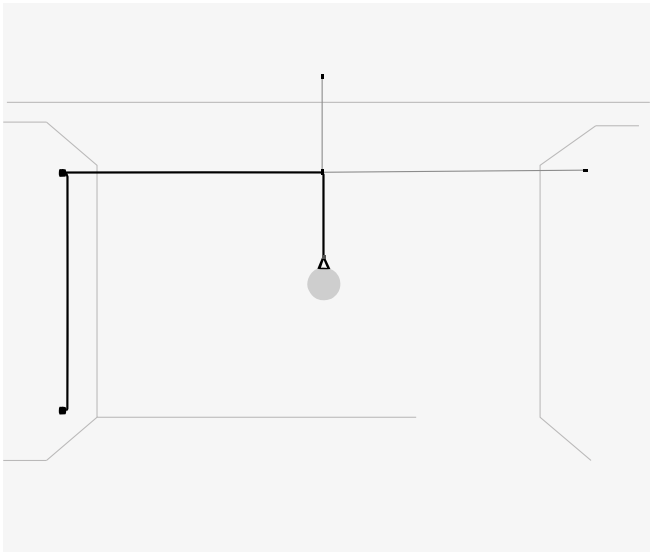


Sketch composed by one composition.

1 luminaire: Sphere 6235.

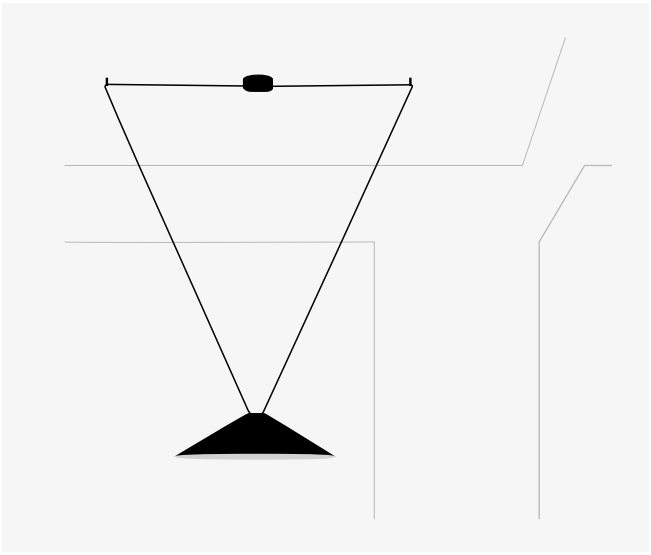

Sketch composed by one composition.


1 luminaire: Cone 6245.

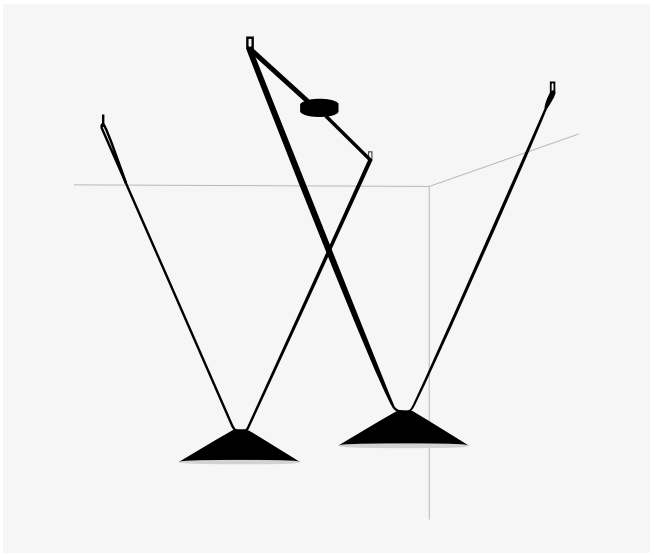

Sketch composed by one composition.


2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices

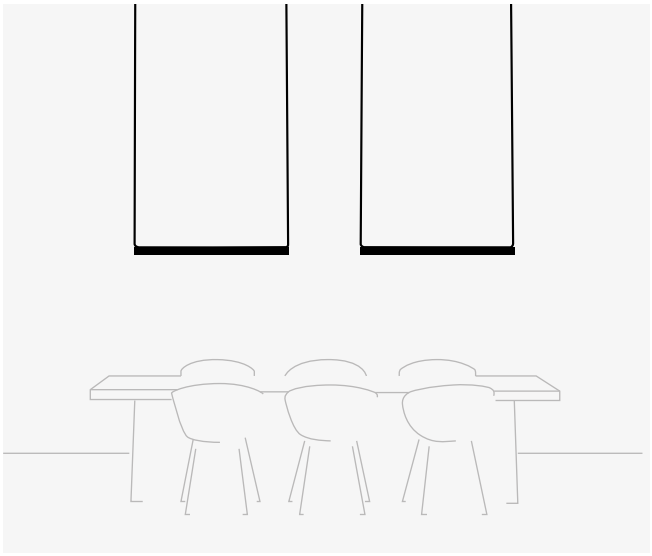


Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.

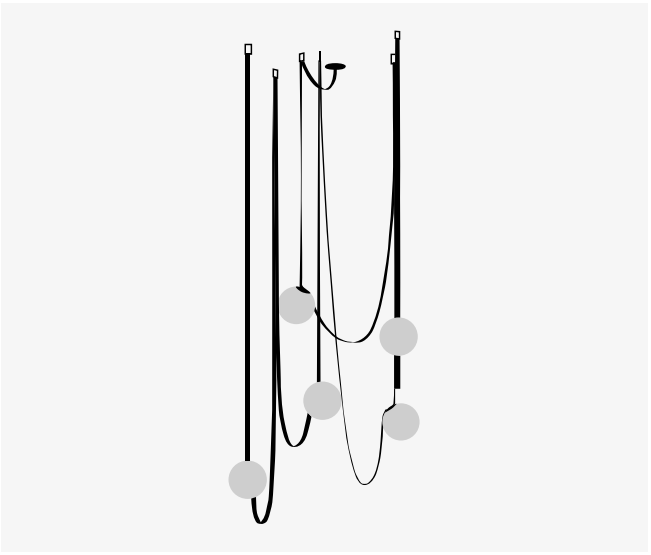


Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

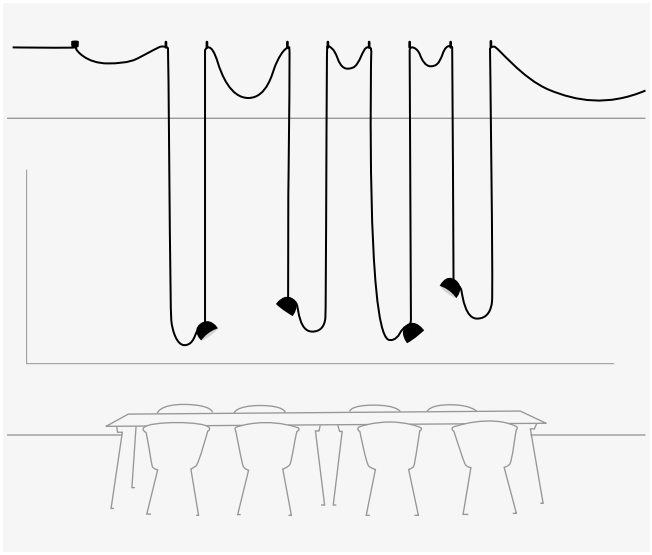


Sketch composed by one composition.

4 luminaires: Semiphere 6220 x 4.

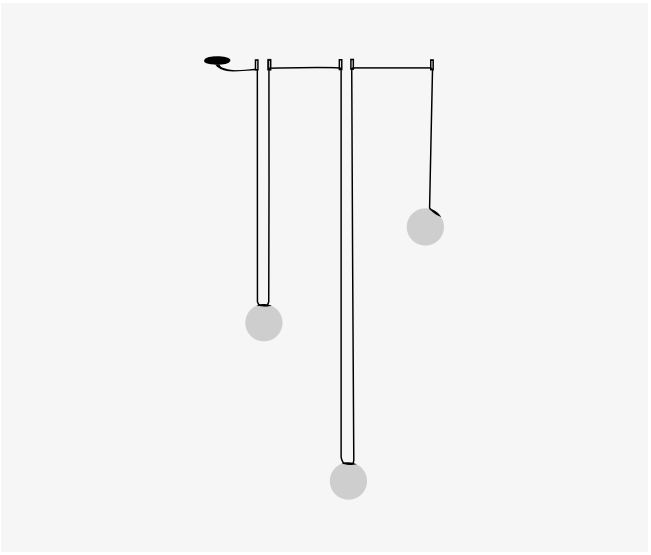


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

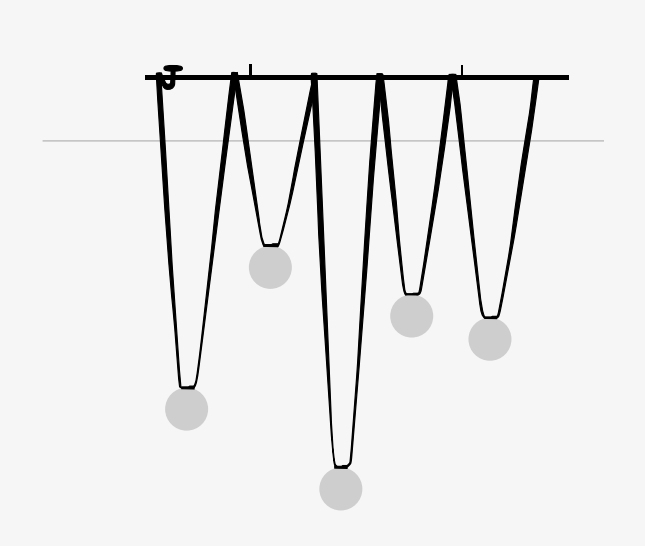

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

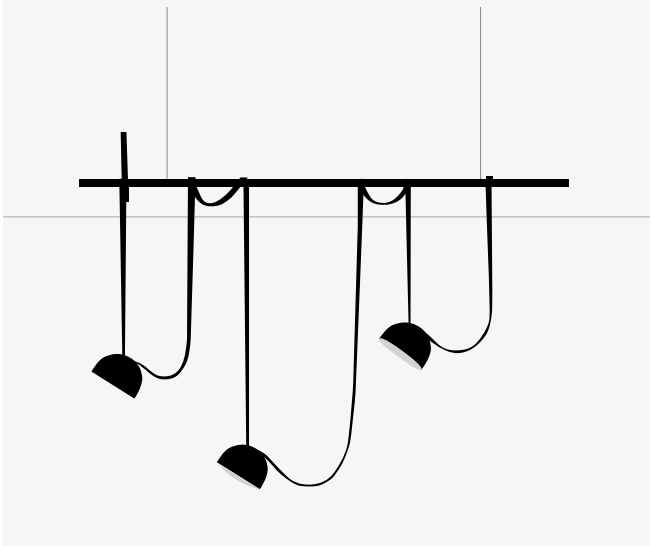

Sketch composed by one composition.

3 luminaires: Semisphere 6220 x 3.

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalise your own Plusminus composition
quick and easy at vibia.com

Plusminus Solo

Design by Diez Office

Plusminus Solo introduces a collection of versatile semi-spherical luminaires that adapt to the surrounding space. Easily adjustable, the Plusminus wall range features semi-spherical directed flat diffusers in different sizes, as well as an accent spotlight for more precise illumination.

Ceiling Wall

Spot Accent Light

6330 Narrow
6331 Medium
6332 Wide


Ø 10 cm



Spot Flat Diffuser

6333

Ø 10 cm



Spot Flat Diffuser

6335

Ø 20 cm




Spot Flat Diffuser

6340

Ø 30 cm



6330
Narrow
6331
Medium
6332
Wide



6330 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 916 lm
/2 _ 3000 K - 925 lm
/3 _ 3500 K - 959 lm

E

CRI >90

Control

6330 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **B** Push; 1-10V (Remote)
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA
3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,67 Kg Net weight 0,49 Kg

LED IP20 Dimmer

Ø 3 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

6331 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 916 lm
/2 _ 3000 K - 925 lm
/3 _ 3500 K - 959 lm

E

CRI >90

Control

6331 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **B** Push; 1-10V (Remote)
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA

3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

LED IP20 Dimmer

Ø 3 cm

6332 Wide

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 916 lm
/2 _ 3000 K - 925 lm
/3 _ 3500 K - 959 lm

E

CRI >90

Control

6332 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **B** Push; 1-10V (Remote)
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA

3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz




Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

LED IP20 Dimmer


Ø 3 cm

Spotlight - Accent


Narrow	Medium	Wide
		
15°	33°	49°
ø 0,2 m	ø 0,69 m	ø 0,9 m
Ø 0,4 m	Ø 1,37 m	Ø 1,8 m
ø 0,2 m 1240 lx	ø 0,69 m 851 lx	ø 0,9 m 307 lx
Ø 0,4 m 310 lx	Ø 1,37 m 213 lx	Ø 1,8 m 77 lx

H = 1,5 m

H = 3 m



6333
Flat Diffuser



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 491 lm
/2 _ 3000 K - 546 lm
/3 _ 3500 K - 566 lm
E
CRI >90


Control
6333 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
2700 K:
1 x LED 4,2 W 250 mA
3000 K - 3500K:
1 x LED 4,1 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg
LED IP20 Dimmer
Ø 3 cm

6335



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm
E
CRI >90


Control
6335 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,31 Kg Net weight 0,89 Kg
LED IP20 Dimmer
Ø 5,5 cm

6340



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1673 lm
/2 _ 3000 K - 1752 lm
/3 _ 3500 K - 1817 lm
E
CRI >90

Control
6340 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA
Constant Current 850 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,20 Kg Net weight 1,70 Kg
LED IP20 Dimmer
Ø 5,5 cm

Table Floor




6341 Accent medium / Surface
6343 Flat diffuser / Surface

Ø 10 x 50 cm

6346 Accent medium / Bolt-down
6348 Flat diffuser / Bolt-down

Ø 10 x 50 cm

6341
Accent medium / Surface
6343
Flat diffuser / Surface



6341 Accent medium / Surface

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
- **/1** _ 2700 K - 941 lm
- **/2** _ 3000 K - 987 lm
- **/3** _ 3500 K - 1022 lm

E

CRI >90

Control
6341 _ _ / _ _
- _ _ / _ **5** Push
- _ _ / _ **Y** ProtoPixel*
- _ _ / _ **Z** Casambi

Materials
Body: Aluminum.
Base: Steel / Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from Januray 2025.
Cable with plug included.

LED IP20 Dimmer

6343 Flat diffuser / Surface

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
- **/1** _ 2700 K - 531 lm
- **/2** _ 3000 K - 557 lm
- **/3** _ 3500 K - 557 lm

E

CRI >90

Control
6343 _ _ / _ _
- _ _ / _ **5** Push
- _ _ / _ **Y** ProtoPixel*
- _ _ / _ **Z** Casambi

Materials
Body: Aluminum.
Base: Steel.
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from Januray 2025.

LED IP20 Dimmer

6346
Accent medium / Bolt-down
6348
Flat diffuser / Bolt-down

6346 Accent medium / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm
E
CRI >90

Control
6346 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **Z** _ **40** Casambi

Materials
Body: Aluminum,
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

LED IP20 Dimmer

6348 Flat diffuser / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 531 lm
/2 _ 3000 K - 557 lm
/3 _ 3500 K - 557 lm
E
CRI >90

Control
6348 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **Z** _ **40** Casambi

Materials
Body: Aluminum,
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz


Packaging
1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

LED IP20 Dimmer



Product specifications subject to change without notice. Please check vibia.com for updated information.

Wall Table Floor

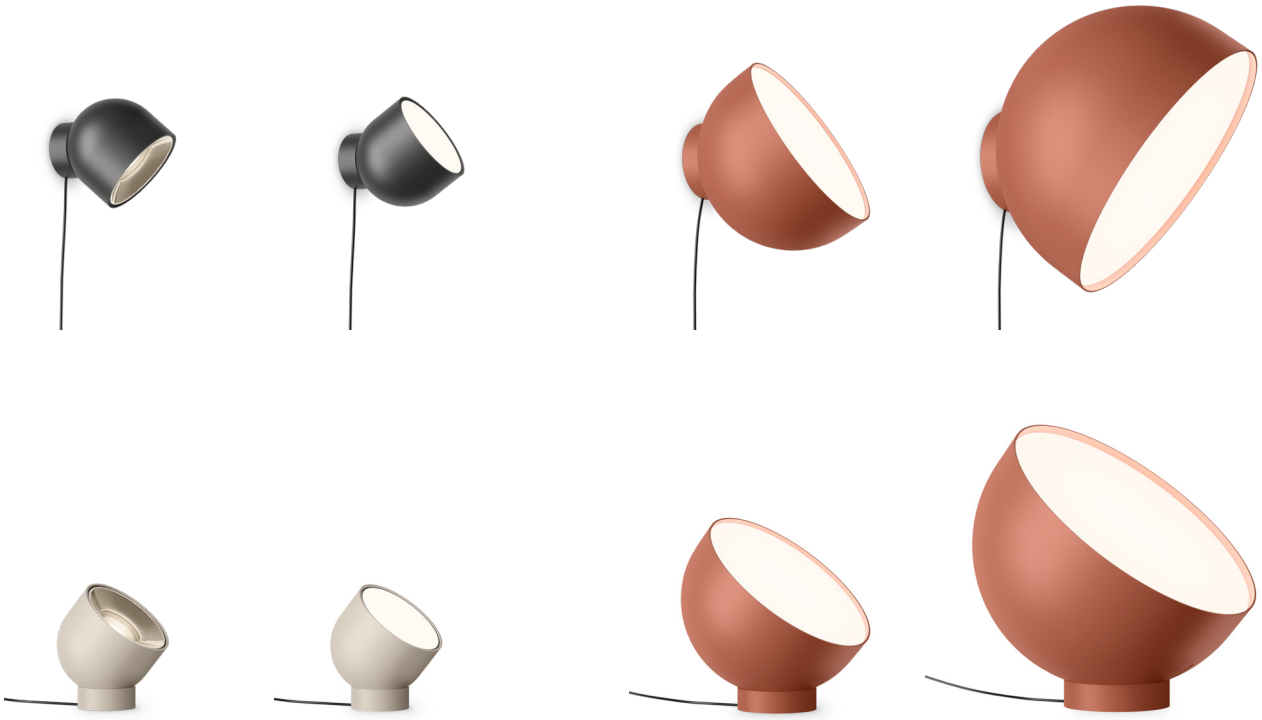

Accent medium
6361 Surface / Bolt-down
Ø 10 cm

Flat diffuser
6363 Surface / Bolt-down
Ø 10 cm


Flat diffuser
6365 Surface / Bolt-down
Ø 20 cm

Flat diffuser
6370 Surface / Bolt-down
Ø 30 cm





6361
Accent medium
Surface / Bolt down
6363
Flat diffuser Surface /
Bolt-down



6361 Accent medium Surface / Bolt-down

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm

E

CRI >90

Control

6361 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Y** ProtoPixel*
_ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³
Gross weight 0,95 Kg Net weight 0,73 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from Januray 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 6 cm. Height 2,3 cm.

LED IP20 Dimmer

6363 Flat diffuser Surface / Bolt-down

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 531 lm
/2 _ 3000 K - 557 lm
/3 _ 3500 K - 557 lm

E

CRI >90

Control

6363 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Y** ProtoPixel*
_ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³
Gross weight 0,98 Kg Net weight 0,73 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from Januray 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 6 cm. Height 2,3 cm.

LED IP20 Dimmer

6365
Flat diffuser Surface /
Bolt-down



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm

E

CRI >90

Control

6365 _ _ / _ _

_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,31 Kg Net weight 0,89 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from Januray 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 8,2 cm. Height 2,3 cm.

LED IP20 Dimmer

6370
Flat diffuser Surface /
Bolt-down



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1673 lm
/2 _ 3000 K - 1752 lm
/3 _ 3500 K - 1817 lm

E

CRI >90

Control

6370 _ _ / _ _

_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 16 W 850 mA
Constant Current 850 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,20 Kg Net weight 1,70 Kg

Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from Januray 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 11 cm. Height 2,8 cm.

LED IP20 Dimmer





Kontorno

Design by Sebastian Herkner

Consisting of an elegant linear framework complemented by a cylindrical diffuser or curved reflector, the Kontorno collection envelops the light source it contains, offering diffuse, balanced illumination.

Wall



6414
20 x 92 cm


6416
20 x 122 cm

6418
20 x 162 cm

6444
19 x 92 cm

6446
19 x 122 cm

6414



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
F
/3 _ 3500 K - 2551 lm
E
/7 _ 2200 K - 2041 lm
F
CRI >90

Control
6414 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi


Materials
Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 CE UK CA EAC
Dimmer Multi-volt

6416



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E
/2 _ 3000 K - 3154 lm
F
/3 _ 3500 K - 3380 lm
E
/7 _ 2200 K - 2703 lm
F
CRI >90

Control
6416 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials
Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.


Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

LED IP20 CE UK CA EAC
Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

6418

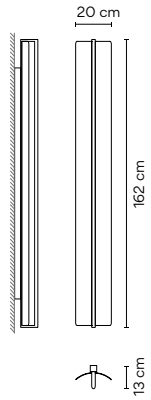

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4205 lm
E
/2 _ 3000 K - 4205 lm
F
/3 _ 3500 K - 4506 lm
E
/7 _ 2200 K - 3604 lm
F
CRI >90

Control
6418 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi


Materials
Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 0,175 m
Vol 0,1580 m³
Gross weight 6,5 Kg Net weight 4 Kg

LED IP20 CE UKCA EAC
Dimmer Multi-volt

6444



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
F
/3 _ 3500 K - 2551 lm
E
/7 _ 2200 K - 2041 lm
F
CRI >90

Control
6444 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi


Materials
Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

LED IP20 CE UKCA EAC
Dimmer Multi-volt

6446

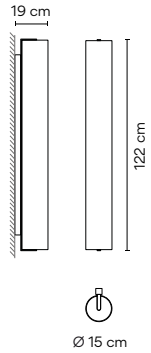

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E
/2 _ 3000 K - 3154 lm
F
/3 _ 3500 K - 3380 lm
E
/7 _ 2200 K - 2703 lm
F
CRI >90

Control
6446 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi


Materials
Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

LED IP20 CE UKCA EAC
Dimmer Multi-volt


Pendant



6434
92 x max. 200 cm



6436
122 x max. 200 cm

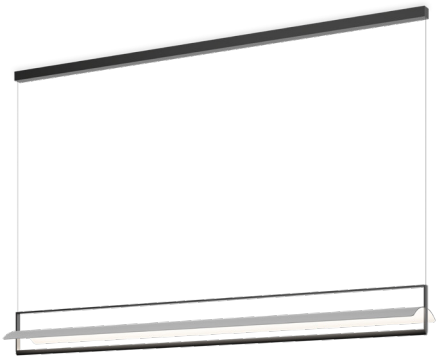

6438
162 x max. 200 cm




6474
92 x max. 200 cm



6476
122 x max. 200 cm

6434



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 2381 lm
E

/2 _ 3000 K - 2381 lm
F

/3 _ 3500 K - 2551 lm
E

/7 _ 2200 K - 2041 lm
F

CRI >90

Control

6434 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m^3
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes

Extra cable length.

LED IP20 Dimmer Multi-volt

6436



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3154 lm
E

/2 _ 3000 K - 3154 lm
F

/3 _ 3500 K - 3380 lm
E

/7 _ 2200 K - 2703 lm
F

CRI >90

Control

6436 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

Notes

Extra cable length.

LED IP20 CE UKCA EAC
Dimmer Multi-volt

6438



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4205 lm
E

/2 _ 3000 K - 4205 lm
F

/3 _ 3500 K - 4505 lm
E

/7 _ 2200 K - 3604 lm
F

CRI >90

Control

6438 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,75 m
Vol 0,158 m³
Gross weight 6,5 Kg Net weight 4 Kg

Notes

Extra cable length.

LED IP20 CE UKCA EAC
Dimmer Multi-volt

6474



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 2381 lm
E

/2 _ 3000 K - 2381 lm

/7 _ 2200 K - 2041 lm
F

CRI >90

Control

6474 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg


Notes

Extra cable length.

LED IP20 CE UKCA EAC
Dimmer Multi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

6476



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3154 lm
E

/2 _ 3000 K - 3154 lm

/7 _ 2200 K - 2703 lm
F

CRI >90

Control

6476 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz


Packaging

1 Box 0,75 x 0,45 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

Notes

Extra cable length.

LED IP20 Dimmer Multi-volt

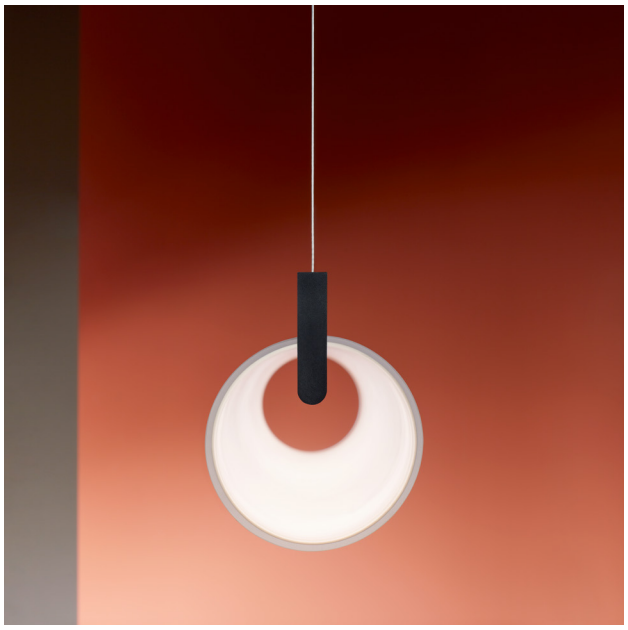

Product specifications subject to change without notice. Please check vibia.com for updated information.



Bind

Design by Martín Azúa

Bind is a hybrid lighting system designed to create multiple atmospheres to suit a range of spaces, uses and moods. The connective quality, ease of installation and versatility of this fully modular system guarantees a harmonious balance between technical and decorative lighting, promising new holistic lighting solutions.

Pendant Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

6500 Narrow
6504 Medium

Ø 3 x 15 cm



DOWNLIGHT Ø 4 cm

6520 Narrow
6524 Medium
6528 Wide

Ø 4 x 17,5 cm



6525 Medium
6529 Wide

Ø 4 x 20 cm



Pendant Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

6510 Narrow
6514 Medium


Ø 3 x 20 cm



SPOTLIGHT Ø 4 cm

6530 Narrow
6534 Medium
6538 Wide

Ø 4 x 22,5 cm



Pendant Ceiling - Wide Accent Downlight


DOMO Ø 18,5 cm

6540 Medium
6542 Wide



Product specifications subject to change without notice. Please check vibia.com for updated information.

6500
Narrow
6504
Medium



6500 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 451 lm
- **/2** _ 3000 K - 471 lm
- **/3** _ 3500 K - 489 lm

F

CRI >90

Control
6500 _ _ **/** _ _
- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Y** ProtoPixel* (P2P)
- _ _ **/** _ **Z** Casambi (P2P)

Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED 4,3 W 250 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20 CE UKCA EAC

6504 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 451 lm
- **/2** _ 3000 K - 471 lm
- **/3** _ 3500 K - 489 lm

F

CRI >90

Control
6504 _ _ **/** _ _
- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Y** ProtoPixel* (P2P)
- _ _ **/** _ **Z** Casambi (P2P)


Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED 4,3 W 250 mA


Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20 CE UKCA EAC

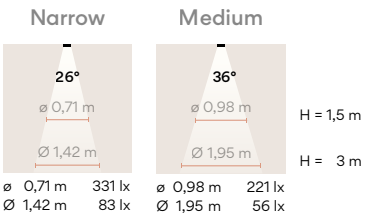

6520
Narrow
6524
Medium
6528
Wide



6520 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control

6520 _ _ **/** _ _

- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Y** ProtoPixel* (P2P)
- _ _ **/** _ **Z** Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20

6524 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control

6524 _ _ **/** _ _

- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Y** ProtoPixel* (P2P)
- _ _ **/** _ **Z** Casambi (P2P)

Material

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20

6528 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6528 _ _ **/** _ _
- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Y** ProtoPixel* (P2P)
- _ _ **/** _ **Z** Casambi (P2P)


Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED LED 5,2 W 300 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20 CE UKCA EAC

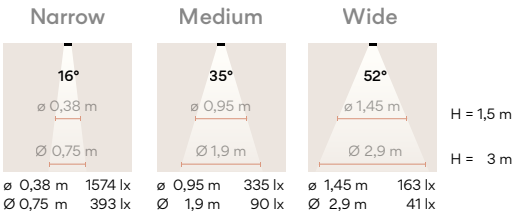

6525
Medium
6529
Wide



6525 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
E
CRI >90

Control
6525 _ _ **/** _ _
- _ _ **/ 8Y** ProtoPixel* (P2P)
- _ _ **/ 8Z** Casambi (P2P)

Materials
Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics
1 x LED 5,5 W 150 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20 CE UKCA EAC

6529 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
E
CRI >90

Control
6529 _ _ **/** _ _
- _ _ **/ 8Y** ProtoPixel* (P2P)
- _ _ **/ 8Z** Casambi (P2P)

Materials
Lens: Polycarbonate.
Body: Aluminum.


Light Source and electronics
1 x LED 5,5 W 150 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20 CE UKCA EAC

6510
Narrow
6514
Medium



6510 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F

CRI >90

Control

6510 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20

6514 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F

CRI >90

Control

6514 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

Materials

Lens: PMMA..
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.


LED IP20

Narrow



ø 0,71 m 331 lx
Ø 1,42 m 83 lx

Medium




H = 1,5 m
H = 3 m

ø 0,98 m 221 lx
Ø 1,95 m 56 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

6530
Narrow
6534
Medium
6538
Wide



6530 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control

6530 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Y** ProtoPixel* (P2P)
_ _ **/** _ **Z** Casambi (P2P)

Materials

Lens: PMMA
Body: Aluminum.

Light Source and electronics

1 x LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20

6534 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control

6534 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Y** ProtoPixel* (P2P)
_ _ **/** _ **Z** Casambi (P2P)
_ _ **/ 8Y** Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Tunable White:
1 x LED 5,6 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20

6538 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White

/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6538 _ _ / _ _

_ _ / _ F	On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ Y	ProtoPixel* (P2P)
_ _ / _ Z	Casambi (P2P)
_ _ / 8Y	Tunable White + ProtoPixel* (P2P)
_ _ / 8Z	Tunable White + Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Tunable White:
1 x LED 5,6 W 150 mA

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,87 Kg Net weight 0,27 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

* Available from January 2025.

LED IP20

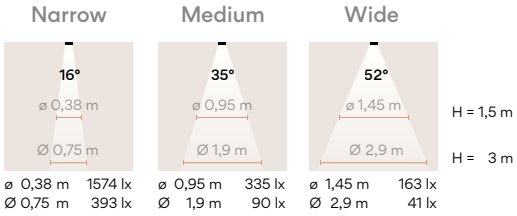


ø 0,38 m	1574 lx	ø 0,95 m	335 lx	ø 1,45 m	163 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx	Ø 2,9 m	41 lx





Product specifications subject to change without notice. Please check vibia.com for updated information.

6540
Medium
6542
Wide



6540 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control

6540 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Y** ProtoPixel* (P2P)
_ _ **/** _ **Z** Casambi (P2P)

_ _ **/ 8Y** Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials
Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.

LED IP20 CE UKCA EAC

6542 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control

6542 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Y** ProtoPixel* (P2P)
_ _ **/** _ **Z** Casambi (P2P)

_ _ **/ 8Y** Tunable White + ProtoPixel* (P2P)
_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials
Diffuser: PC- Polycarbonate.
Lens: Polycarbonate.
Body: Aluminum.


Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.


LED IP20 CE UKCA EAC

Medium



ø 0,62 m 1485 lx
Ø 1,24 m 371 lx

Wide




ø 1,55 m 360 lx
Ø 3,1 m 90 lx

H = 1,5 m
H = 3 m

Luminaire types

Bind track is compatible with the Skan, Slim, North, Tempo and Tube pendant collections, presenting a range of decorative silhouettes with multiple lighting effects. Single or multiple pendant can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendant.

Pendant

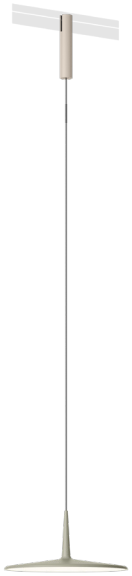

6560 (11 Black)
6561 (24 Beige)



6570 (11 Black)
6571 (24 Beige)



6575 (11 Black)
6576 (24 Beige)




6590 (11 Black)
6591 (24 Beige)



6580 (11 Black))
6581 (24 Beige)



6583 (11 Black)
6584 (24 Beige)



6586 (11 Black)
6587 (24 Beige)



Multiple fixtures can be connected at any point using a pincer.

Black (NCS S 8500-N)

Beige M1 (NCS S 2005-Y50R)

Product specifications subject to change without notice. Please check vibia.com for updated information.

6560
Black pincer
6561
Beige pincer



Finishes (shade)

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

6560 _ _ / _ _
6561 _ _ / _ _

- _ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ / _ **Y** ProtoPixel* (P2P)
- _ _ / _ **Z** Casambi (P2P)

6560
Finishes (pincer)
Black (NCS S 8500-N)

6561
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Body: Aluminum.
Diffuser: PMMA.


Light Source and electronics
1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging
1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m^3
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20

6570
Black pincer
6571
Beige pincer



Finishes (shade)
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 181,22 lm
F
CRI >90
/2 _ 3000 K - 163,2 lm
G
CRI >80
/3 _ 3500 K - 207,6 lm
F
CRI >90

Control
6570 _ _ / _ _
6571 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

6570
Finishes (pincer)
Black (NCS S 8500-N)

6571
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Glass.
Body: FG- Fiberglass.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,17 x 0,19 x 1,21 m
Vol 0,0370 m³
Gross weight 2,48 Kg Net weight 1,35 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20 CE UKCA EAC

6575
Black pincer
6576
Beige pincer



Finishes (shade)
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
CRI >90
/2 _ 3000 K - 1123 lm
D
CRI >80
/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control
6575 _ _ / _ _
6576 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

6575
Finishes (pincer)
Black (NCS S 8500-N)

6576
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Shade: Aluminum.
Diffuser: PMMA.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20 CE UKCA EAC

6590
Black pincer
6591
Beige pincer



Finishes (shade)
- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm
E
CRI >90

Control
6590 _ _ / _ _
6591 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

6590
Finishes (pincer)
Black (NCS S 8500-N)

6591
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: PC- Polycarbonate.
Shade: Aluminum.
Led support: Aluminum.
Tube: Steel.


Light Source and electronics
1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20

6580
Black pincer
6581
Beige pincer



Finishes (shade)
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
6580 _ _ / _ _
6581 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

6580
Finishes (pincer)
Black (NCS S 8500-N)

6581
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

6583
Black pincer
6584
Beige pincer



Finishes (shade)
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
6583 _ _ / _ _
6584 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

6583
Finishes (pincer)
Black (NCS S 8500-N)

6584
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20

6586
Black pincer
6587
Beige pincer



Finishes (shade)
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
6586 _ _ / _ _
6587 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Y** ProtoPixel* (P2P)
_ _ / _ **Z** Casambi (P2P)

6586
Finishes (pincer)
Black (NCS S 8500-N)

6587
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
* Available from January 2025.
Extra cable length.

LED IP20



Select your model at **vibia.com** and adjust











See more
multiple models
at **vibia.com**

Tracks

Ceiling Tracks

A491 120 cm
A492 210 cm
A493 300 cm



Ceiling Tracks 120 cm **A491 _ _ / 0M**
Ceiling Tracks 210 cm **A492 _ _ / 0M**
Ceiling Tracks 300 cm **A493 _ _ / 0M**

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Canopy: ABS + Polycarbonate.

IP20

Packaging A491

1 Box
0,068 x 0,068 x 1,25 m
Vol 0,0058 m^3
Gross weight 1,75 Kg
Net weight 0,90 Kg

Packaging A492

1 Box
0,068 x 0,068 x 2,4 m
Vol 0,0111 m^3
Gross weight 3,24 Kg
Net weight 1,62 Kg

Packaging A493


1 Box
0,068 x 0,068 x 3,15 m
Vol 0,0146 m^3
Gross weight 4,36 Kg
Net weight 2,17 Kg



Product specifications subject to change without notice. Please check vibia.com for updated information.

Pendant Tracks

A419 120 cm (H 9m)
A422 210 cm (H 9m)
A425 300 cm (H 9m)

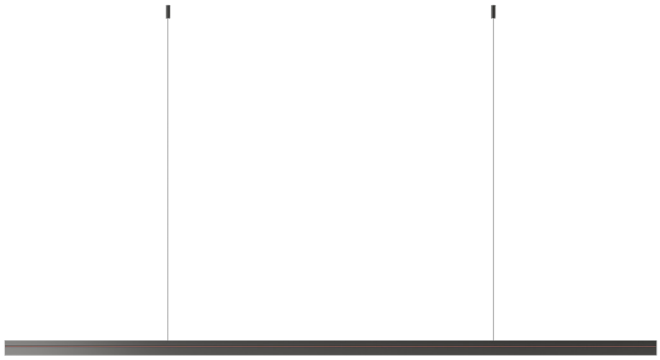

Height 9 m 120 cm **A419 _ _ / 0M**
Height 9 m 210 cm **A422 _ _ / 0M**
Height 9 m 300 cm **A425 _ _ / 0M**

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Canopy: Aluminum.
Ceiling supports: Aluminum.

IP20

Packaging A419
1 Box
0,068 x 0,068 x 1,25 m
Vol 0,0058 m^3
Gross weight 1,87 Kg
Net weight 1,02 Kg

Packaging A422
1 Box
0,068 x 0,068 x 2,4 m
Vol 0,0111 m^3
Gross weight 3,24 Kg
Net weight 1,62 Kg

Packaging A425
1 Box
0,068 x 0,068 x 3,15 m
Vol 0,0146 m^3
Gross weight 4,36 Kg
Net weight 2,17 Kg



Electrical connection options

Driver for ceiling

A494 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 48W + On/ Off + Surface
- _ _ **/ 00_31** 48W + On/ Off + Remote Micro
- _ _ **/ 01_10** 48W + DALI-2 + Surface
- _ _ **/ 01_31** 48W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 48W + 1-10V + Surface
- _ _ **/ 03_31** 48W + 1-10V + Remote Micro
- _ _ **/ 05_10** 48W + Push + Surface
- _ _ **/ 05_31** 48W + Push + Remote Micro
- _ _ **/ 0Z_10** 48W + Casambi + Surface
- _ _ **/ 0Z_31** 48W + Casambi + Remote Micro

A495 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 84W + On/ Off + Surface
- _ _ **/ 00_31** 84W + On/ Off + Remote Micro
- _ _ **/ 01_10** 84W + DALI-2 + Surface
- _ _ **/ 01_31** 84W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 84W + 1-10V + Surface
- _ _ **/ 03_31** 84W + 1-10V + Remote Micro
- _ _ **/ 05_10** 84W + Push + Surface
- _ _ **/ 05_31** 84W + Push + Remote Micro
- _ _ **/ 0Z_10** 84W + Casambi + Surface
- _ _ **/ 0Z_31** 84W + Casambi + Remote Micro

Finishes

11/ 0 _ Black (NCS S 8500-N)
24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Aluminum.

IP20

Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
Max.10 luminaires with Simultaneous line 84 W.
Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0273 m³
Gross weight 0,95 Kg
Net weight 0,53 Kg

Select Eletrical connection



L 30 cm.
A494 _ _ / 00 A495 _ _ / 00

Surface



L 40 cm.
A494 _ _ / 01 A495 _ _ / 01
A494 _ _ / 03 A495 _ _ / 03
A494 _ _ / 05 A495 _ _ / 05
A494 _ _ / 0Z A495 _ _ / 0Z


Surface



Remote

_10 Surface
_31 Remote Micro

Included in tracks electrical connections



Remote
1 x 9 m
electrical cable included

Driver for pendant

A426 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 48W + On/ Off + Surface
- _ _ **/ 00_23** 48W + On/ Off + Built-in XS
- _ _ **/ 00_31** 48W + On/ Off + Remote Micro
- _ _ **/ 01_10** 48W + DALI-2 + Surface
- _ _ **/ 01_23** 48W + DALI-2 + Built-in XS
- _ _ **/ 01_31** 48W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 48W + 1-10V + Surface
- _ _ **/ 03_23** 48W + 1-10V + Built-in XS
- _ _ **/ 03_31** 48W + 1-10V + Remote Micro
- _ _ **/ 05_10** 48W + Push + Surface
- _ _ **/ 05_23** 48W + Push + Built-in XS
- _ _ **/ 05_31** 48W + Push + Remote Micro
- _ _ **/ 0Z_10** 48W + Casambi + Surface
- _ _ **/ 0Z_23** 48W + Casambi + Built-in XS
- _ _ **/ 0Z_31** 48W + Casambi + Remote Micro

A427 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 84W + On/ Off + Surface
- _ _ **/ 00_23** 84W + On/ Off + Built-in XS
- _ _ **/ 00_31** 84W + On/ Off + Remote Micro
- _ _ **/ 01_10** 84W + DALI-2 + Surface
- _ _ **/ 01_23** 84W + DALI-2 + Built-in XS
- _ _ **/ 01_31** 84W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 84W + 1-10V + Surface
- _ _ **/ 03_23** 84W + 1-10V + Built-in XS
- _ _ **/ 03_31** 84W + 1-10V + Remote Micro
- _ _ **/ 05_10** 84W + Push + Surface
- _ _ **/ 05_23** 84W + Push + Built-in XS
- _ _ **/ 05_31** 84W + Push + Remote Micro
- _ _ **/ 0Z_10** 84W + Casambi + Surface
- _ _ **/ 0Z_23** 84W + Casambi + Built-in XS
- _ _ **/ 0Z_31** 84W + Casambi + Remote Micro

Finishes

11/ 0 _ Black (NCS S 8500-N)

24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Surface: Aluminum.
Built-in and Remote Driver box: Steel.

IP20

Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
Max.10 luminaires with Simultaneous line 84 W.
Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0273 m^3
Gross weight 0,95 Kg
Net weight 0,53 Kg

Select Eletrical connection



Surface

L 25 cm.

	A427 _ _ / 00
A426 _ _ / 01	A427 _ _ / 01
A426 _ _ / 03	A427 _ _ / 03
A426 _ _ / 05	A427 _ _ / 05
A426 _ _ / 0Z	A427 _ _ / 0Z



Surface

L 21 cm.
A426 _ _ / 00



Built-in XS



Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Included in tracks electrical connections




Surface

Feeder + 9 m electrical cable included



Built-in

Canopy + 9 m electrical cable included



Remote

Micro canopy + 9 m electrical cable included

Bind Solo

Bind Solo provides a set of tools to play with contrasts, defining functional and transitional areas, as well as hybrid activity zones. The range can be mounted to the ceiling as desired, creating visual hierarchy by directing the gaze towards specific features and combining to form unique compositions overhead.

Ceiling - Accent Downlight - Micro

6600 Narrow
6604 Medium

Ø 3 cm



6650 Narrow
6654 Medium
6658 Wide

Ø 4cm








Product specifications subject to change without notice. Please check vibia.com for updated information.

6600
Narrow
6604
Medium



6600 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6600 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 63 Kg Net weight 0,15 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6604 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6604 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)


Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 63 Kg Net weight 0,15 Kg


Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

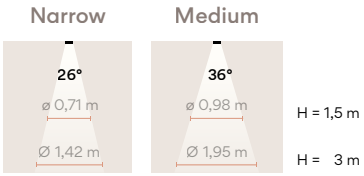

ø 0,71 m	331 lx	ø 0,98 m	221 lx
Ø 1,42 m	83 lx	Ø 1,95 m	56 lx

6650
Narrow
6654
Medium
6658
Wide



6650 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6650 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

6654 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6654 _ _ / _ _
- _ _ / _ **0** Static White + On/ Off (Remote)
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ☐ IP20

6658 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6658 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off (Remote)
_ _ **/** _ **D** Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi (Remote)

_ _ **/ 81** Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20

Narrow	Medium	Wide	
16°	35°	52°	
ø 0,38 m	ø 0,95 m	ø 1,45 m	H = 1,5 m
Ø 0,75 m	Ø 1,9 m	Ø 2,9 m	H = 3 m
ø 0,38 m 1574 lx	ø 0,95 m 335 lx	ø 1,45 m 163 lx	
Ø 0,75 m 393 lx	Ø 1,9 m 90 lx	Ø 2,9 m 41 lx	



Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

6610 Narrow
6614 Medium

Ø 3 x 4 cm



6630 Narrow
6634 Medium

Ø 3 x 10 cm



DOWNLIGHT Ø 4 cm

6660 Narrow
6664 Medium
6668 Wide

Ø 4 x 7 cm



6680 Narrow
6684 Medium
6688 Wide

Ø 4 x 10 cm



Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

6620 Narrow
6624 Medium

Ø 3 x 7 cm



6640 Narrow
6644 Medium

Ø 3 x 11,5 cm



SPOTLIGHT Ø 4 cm

6670 Narrow
6674 Medium
6678 Wide

Ø 4 x 10 cm



6690 Narrow
6694 Medium
6698 Wide

Ø 4 x 14 cm



Ceiling - Wide Accent Downlight


Ø 18,5 cm

6700 Medium
6702 Wide

Ø 18,5 cm



6610
Narrow
6614
Medium



6610 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F

CRI >90

Control

6610 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6614 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F

CRI >90

Control

6614 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.


Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

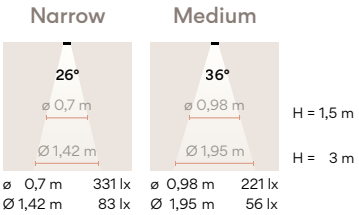

ø 0,7 m	331 lx	ø 0,98 m	221 lx
Ø 1,42 m	83 lx	Ø 1,95 m	56 lx

6630
Narrow
6634
Medium



6630 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6630 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

6634 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6634 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.


Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

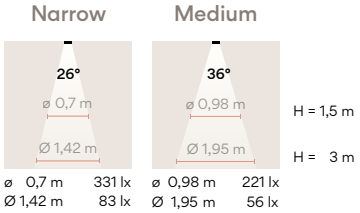

Product specifications subject to change without notice. Please check vibia.com for updated information.

6660
Narrow
6664
Medium
6668
Wide



6660 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control

6660 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum
Lens: PMMA.

Light Source and electronics

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6664 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control

6664 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off (Remote)
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

6668 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6668 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0, 72 Kg Net weight 0,24 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

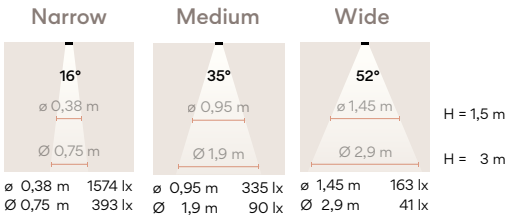


ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx

ø 1,45 m	163 lx
Ø 2,9 m	41 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

6680
Narrow
6684
Medium
6688
Wide



6680 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6680 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,73 Kg Net weight 0,25 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6684 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm
F
CRI >90

Control
6684 _ _ / _ _
- _ _ / _ **0** Static White + On/ Off (Remote)
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

6688 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6688 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m^3
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes


DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20

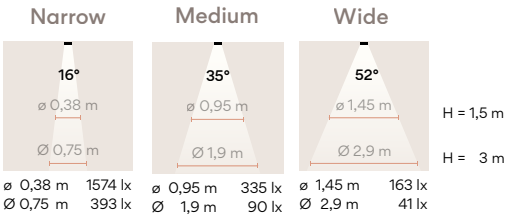


ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx
ø 1,45 m	163 lx		
Ø 2,9 m	41 lx		

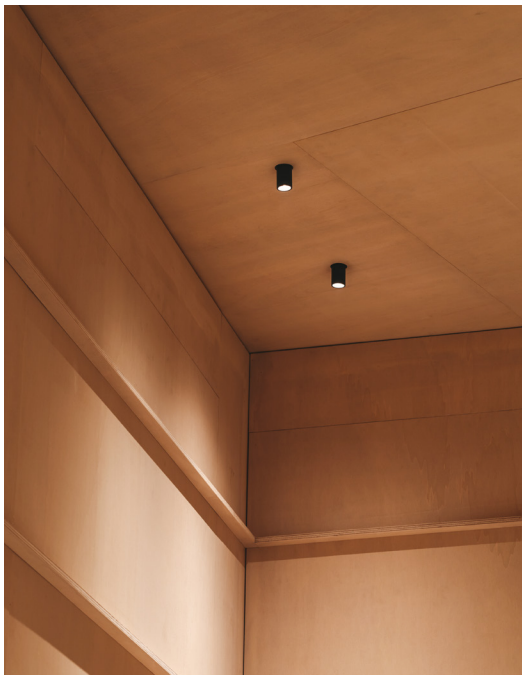

Product specifications subject to change without notice. Please check vibia.com for updated information.

6620
Narrow
6624
Medium



6620 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6620 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

6624 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6624 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.


LED IP20

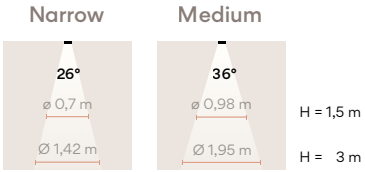

ø 0,7 m 331 lx
Ø 1,42 m 83 lx

ø 0,98 m 221 lx
Ø 1,95 m 56 lx

6640
Narrow
6644
Medium



6640 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6640 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6644 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6644 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)


Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,69 Kg Net weight 0,21 Kg


Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

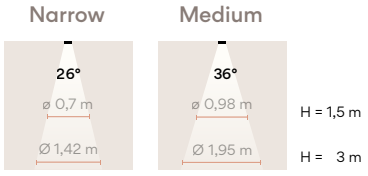

Narrow		Medium	
ø 0,7 m	331 lx	ø 0,98 m	221 lx
Ø 1,42 m	83 lx	Ø 1,95 m	56 lx

6670
Narrow
6674
Medium
6678
Wide



6670 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control

6670 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,1 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6674 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control

6674 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off (Remote)
- _ _ **/** _ **D** Static White + Push; DALI-2 (Remote)
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi (Remote)
- _ _ **/ 81** Tunable White + DALI-2 DT8 (Remote)
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

6678 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6678 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20

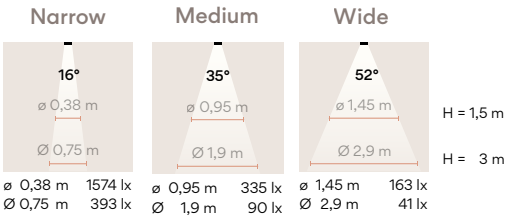


ø 0,38 m	1574 lx	ø 0,95 m	335 lx	ø 1,45 m	163 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx	Ø 2,9 m	41 lx



Product specifications subject to change without notice. Please check vibia.com for updated information.

6690
Narrow
6694
Medium
6698
Wide



6690 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6690 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED PLATE 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20 CE UKCA EAC Dimmer

6694 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6694 _ _ / _ _
- _ _ / _ **0** Static White + On/ Off (Remote)
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20 CE UKCA EAC

6698 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6698 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.


LED □ IP20

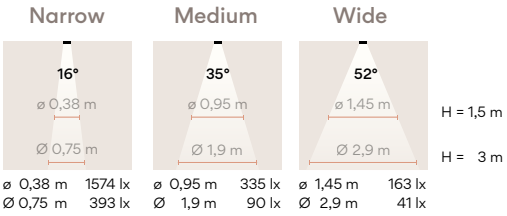

ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx

ø 1,45 m	163 lx
Ø 2,9 m	41 lx

6700
Medium
6702
Wide



6700 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm
Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm
F
CRI >90

Control
6700 _ _ / _ _
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials
Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz
Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,7 Kg Net weight 1,2 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

LED IP20 CE UK CA EAC

6702 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm
Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm
F
CRI >90

Control
6702 _ _ / _ _
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8Z** Tunable White + Casambi (Remote)


Materials
Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz
Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,7 Kg Net weight 1,2 Kg

Notes
DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.


LED IP20 CE UK CA EAC

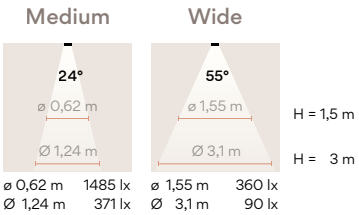

Sticks

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

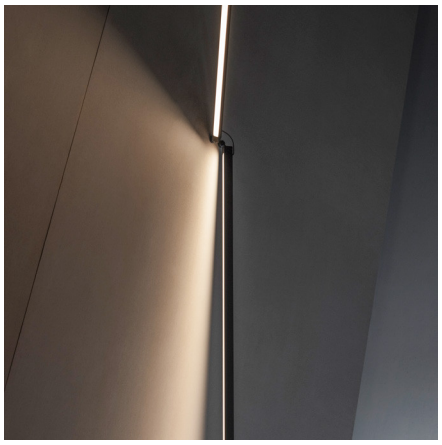






You can chose the desired composition through one of the following three options:

A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 466).

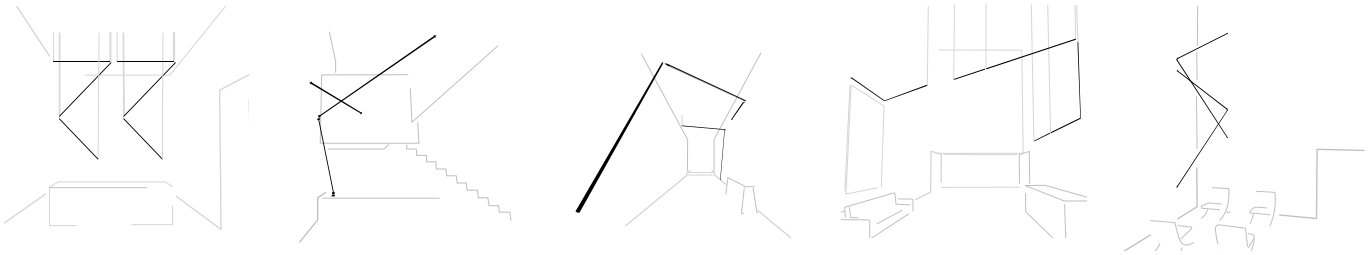

B - Select one composition on vibia.com among multiple applications in spaces, and adjust it to your project by modifying:

+ Length of the sticks.
+ Position of each stick in the space.
+ Colour temperature and dimming.
+ Installation type.



C - Create your configuration on vibia.com from scratch in three easy steps, without sketches.

1

Choose the location for your electrical connection point

2

Add connectable Sticks up to 6.5 meters

3

Configure

+ Colour temperature
+ Dimming control
+ Installation type
+ Pendant height

Technical Specifications
(see page 474)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m,
and they can be connected one to each other
to a total maximum lenght of 6.5 meters per electrical connection.

Wall-Wall / Ceiling-Ceiling



7300
Stick 152 x 3 x 2 cm

7303
Stick 201 x 3 x 2 cm

7306
Stick 300 x 3 x 2 cm

Wall-Wall (corner) / Wall-Ceiling



7330
Stick 158 x 3 x 2 cm

7333
Stick 207 x 3 x 2 cm

7336
Stick 306 x 3 x 2 cm

Wall-Pendant




7310
7311 UGR<19
Stick 153 x 3 x 2 cm

7313
7314 UGR<19
Stick 204 x 3 x 2 cm

7316
7317 UGR<19
Stick 303 x 3 x 2 cm

Pendant-Pendant

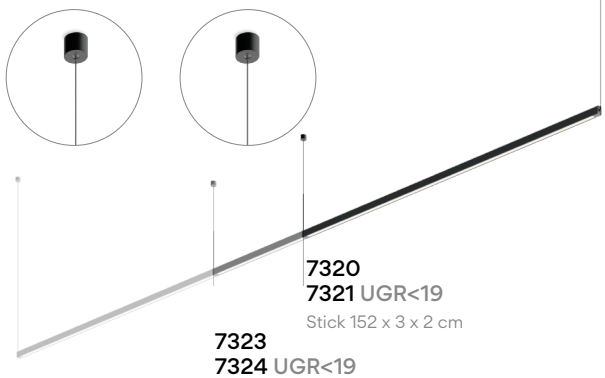


7320
7321 UGR<19
Stick 152 x 3 x 2 cm

7323
7324 UGR<19
Stick 201 x 3 x 2 cm

7326
7327 UGR<19
Stick 300 x 3 x 2 cm

Pendant




7350
Stick 152 x 3 x 2 cm

7353
Stick 201 x 3 x 2 cm

7356
Stick 300 x 3 x 2 cm

Floor-Wall





7346
Stick 310 cm

7343
Stick 211 cm


7340
Stick 163 cm

ø 10 cm

Sticks Connectable


Next sketches are composed by one or more compositions

Pendant / Ceiling

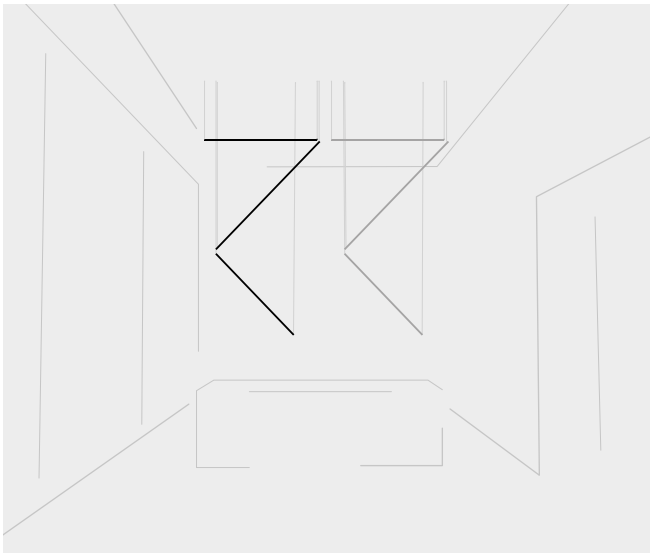


STI001
Sketch composed by two identical compositions.

Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

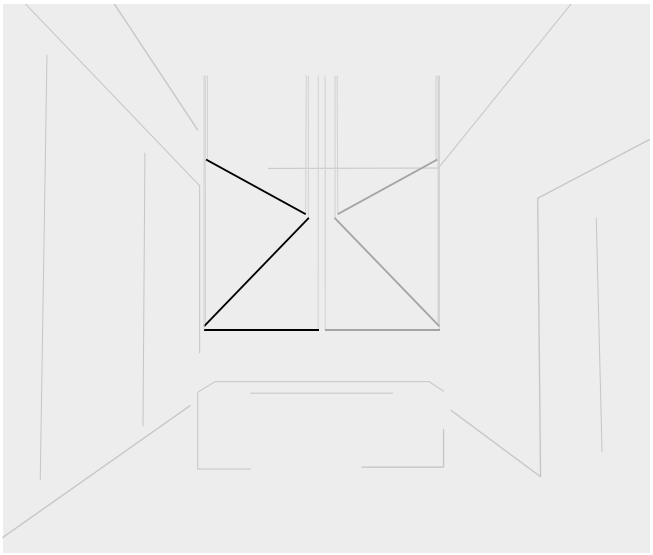

STI005
Sketch composed by two identical compositions.


Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

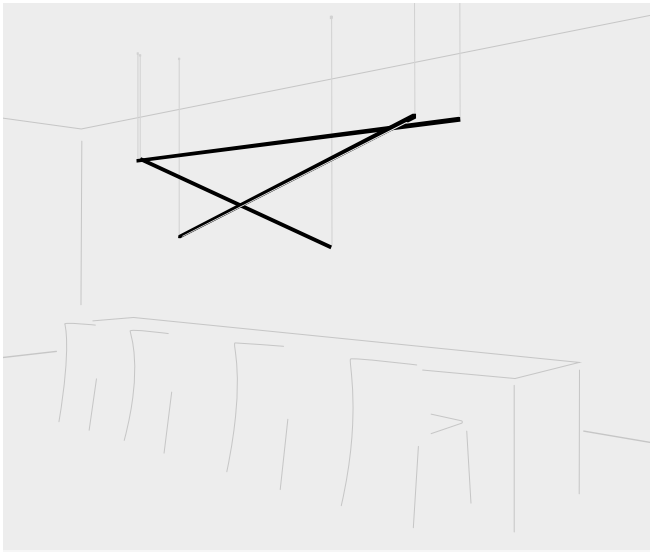

STI015
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Built-in disc S canopy. 1-10V.

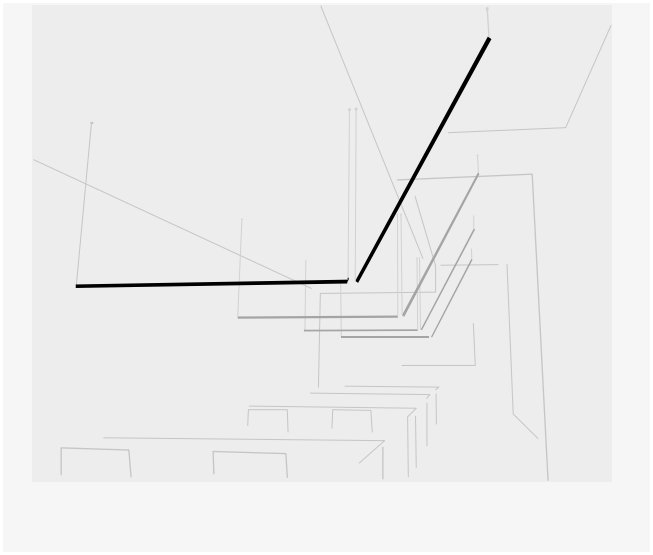


STI021
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 3500 K. 9496 lm. 140,8 W.
Built-in disc S canopy. 1-10V.

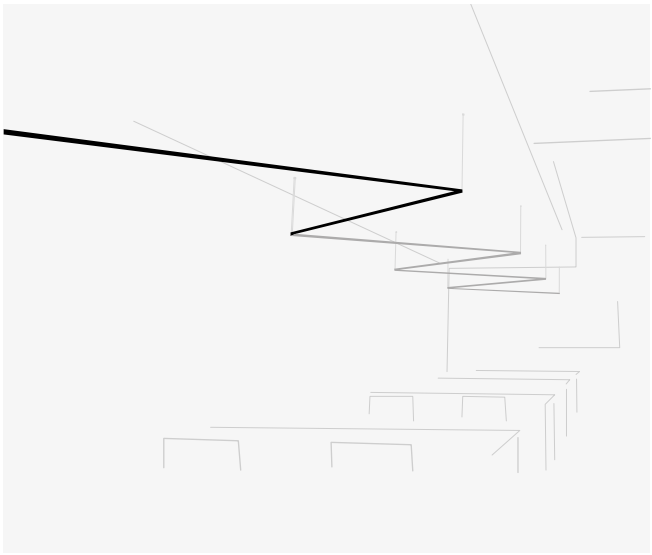


STI025
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

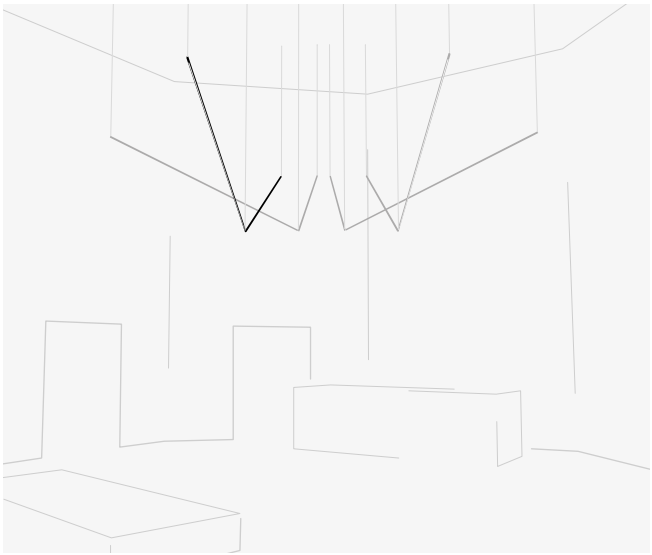


STI035
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 3500 K. 10683 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

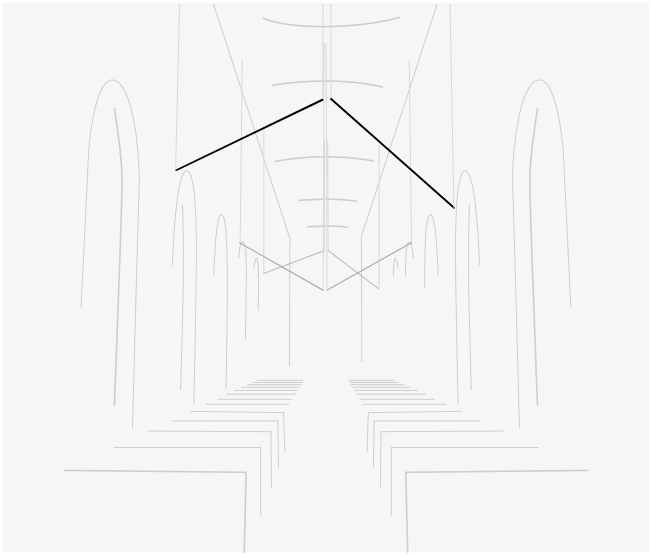

STI041
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

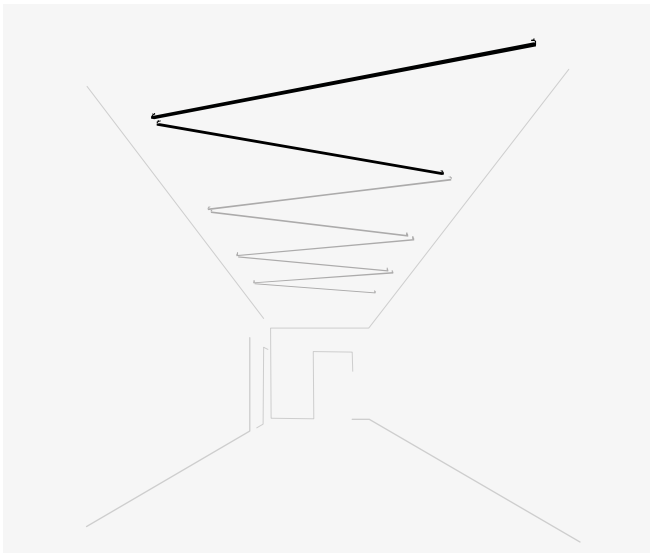


STI085
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall

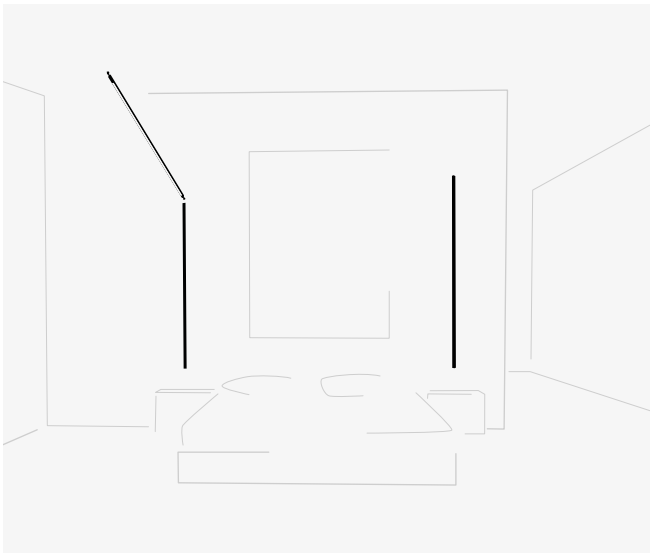

STI051
Sketch composed by two compositions.


Composition 1:
2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

Composition 2:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4346 lm. 35,2 W.
Floor base & plug. Push.

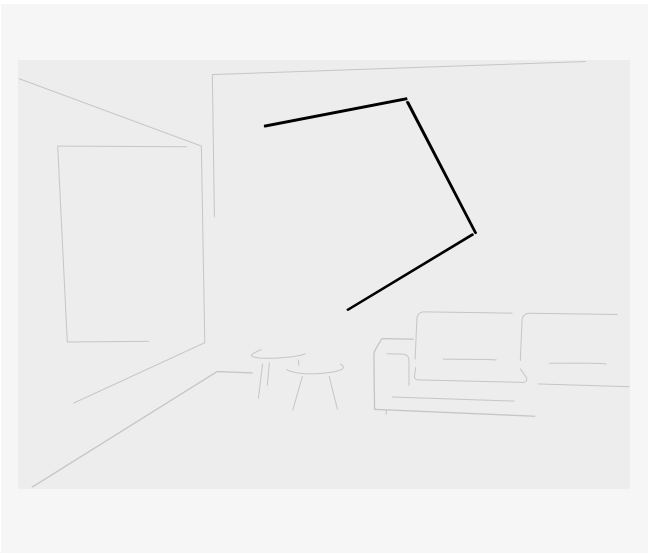


STI055
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.
LED 2700 K. 9780 lm. 79,2 W.
Floor base & plug. Push.

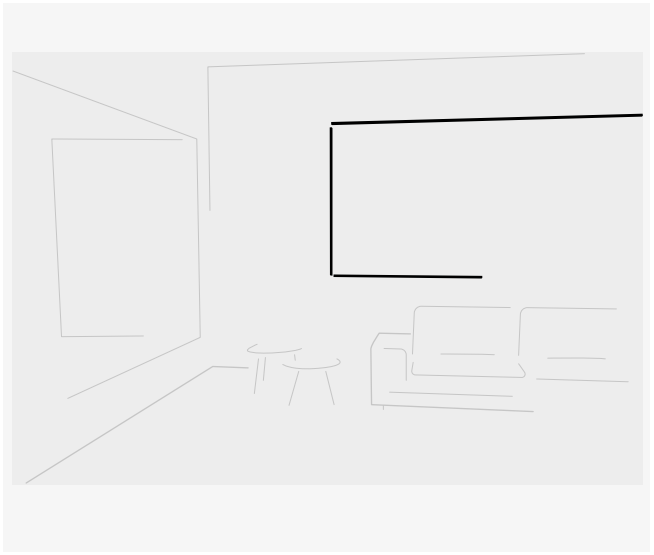


STI061
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 2700 K. 13039 lm. 105,6 W.
Floor base & plug. Push.

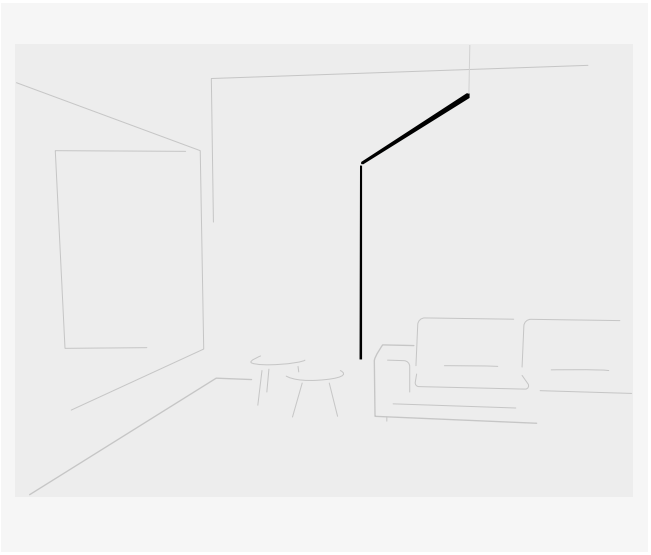


STI065
Sketch composed by only one composition.

2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

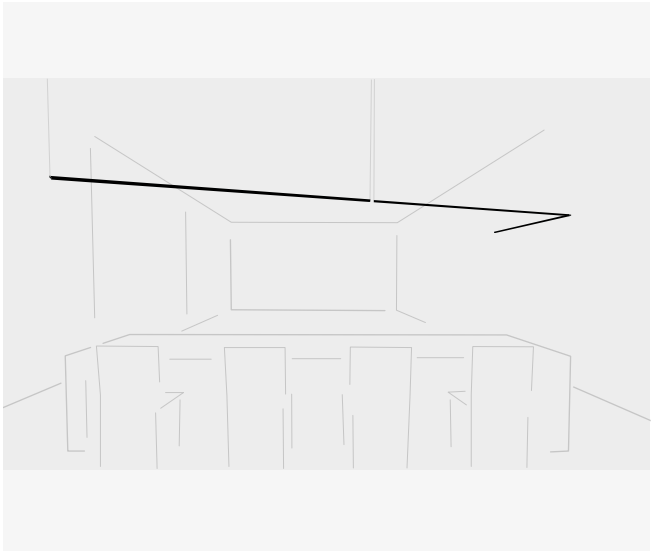


STI071
Sketch composed by only one composition.

3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.
LED 2700 K. 11952 lm. 96,8 W.
Floor base & plug. Push.

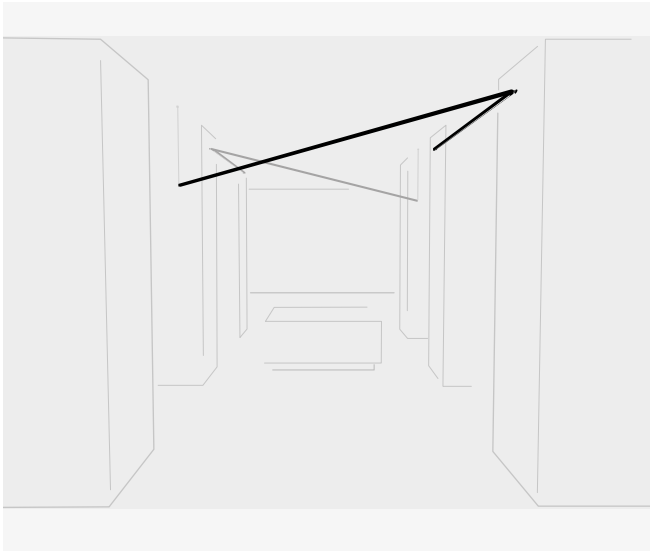

STI075
Sketch composed by two identical compositions.


Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

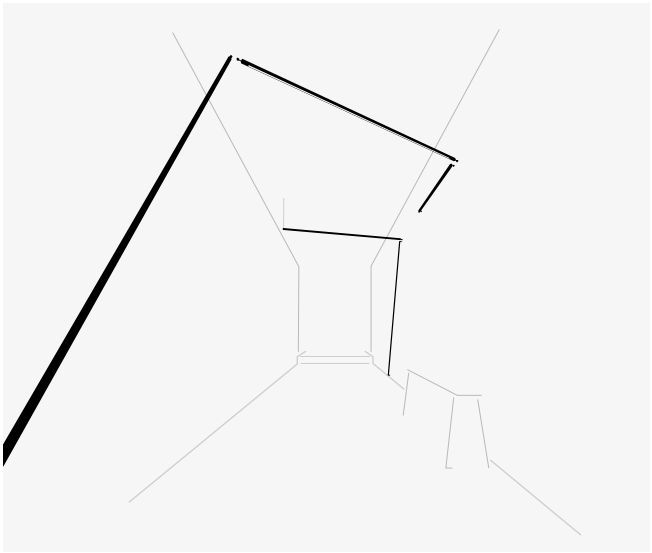

STI081
Sketch composed by two compositions.

Composition 1:
3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.
LED 3500 K. 15431 lm. 114,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

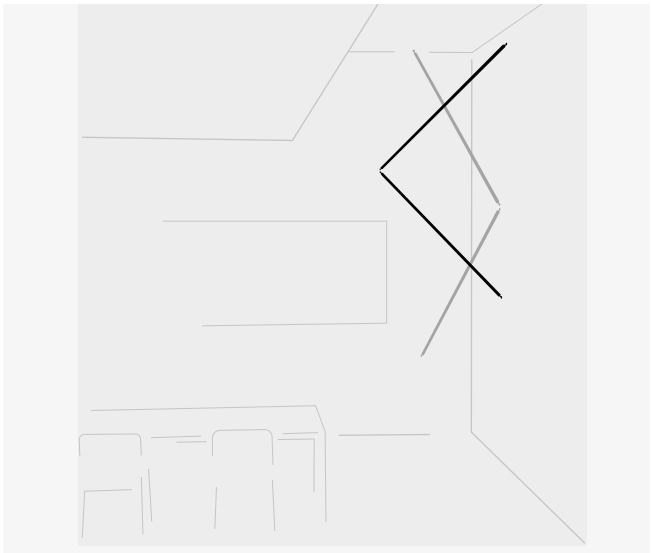


STI091
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 2700 K. 8692 lm. 70,4 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable


Next sketches are composed by one or more compositions

Some sticks are attached to the Wall

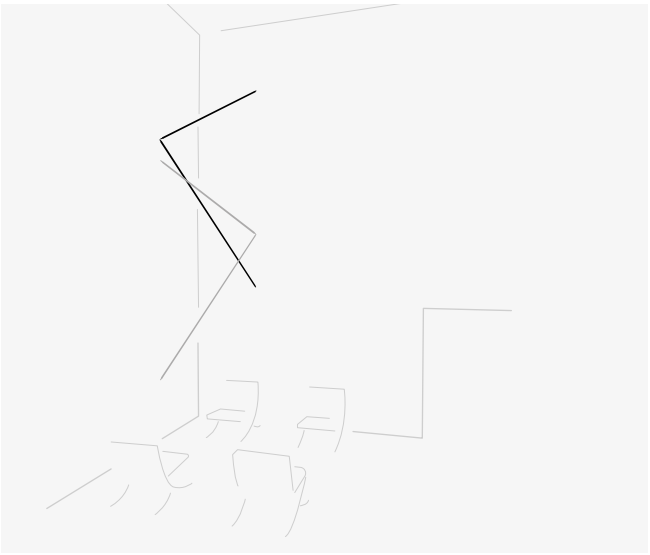

STI095
Sketch composed by two identical compositions.


Each composition:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

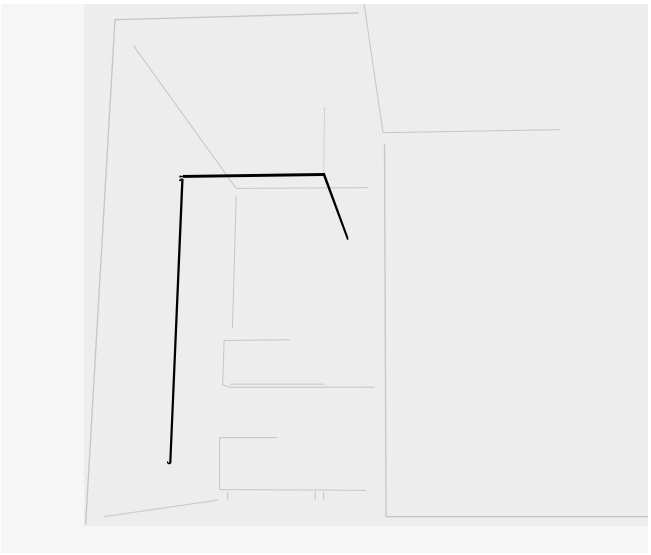

STI101
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Remote driver Built-in Micro. 1-10V.

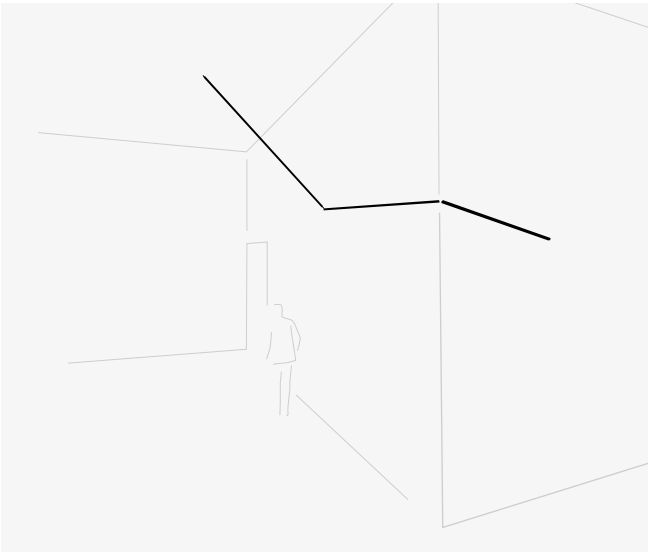


STI105
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Floor base & plug. Push.

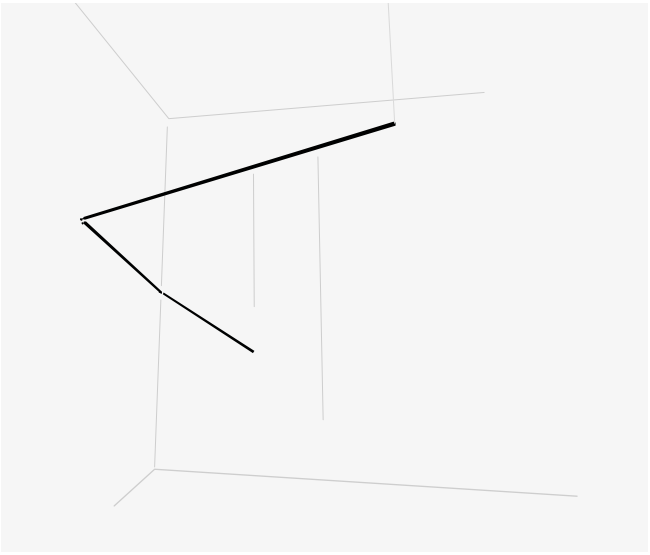


STI111
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

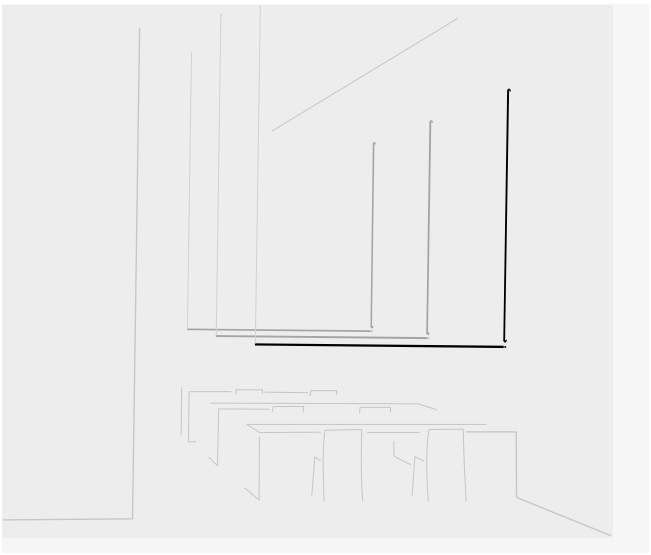

STI115
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 3500 K. 9496 lm. 70,4 W.
Built-in disc S canopy. 1-10V.

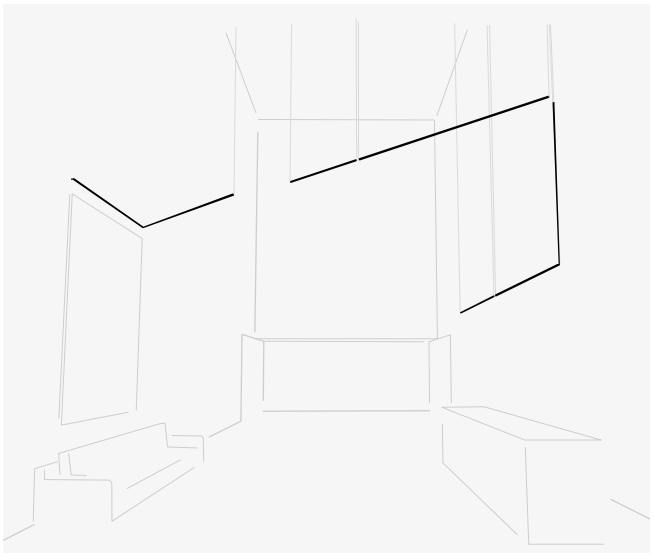


STI131
Sketch composed by four compositions.

Composition 1:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 3500 K. 3561 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 3:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Composition 4:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

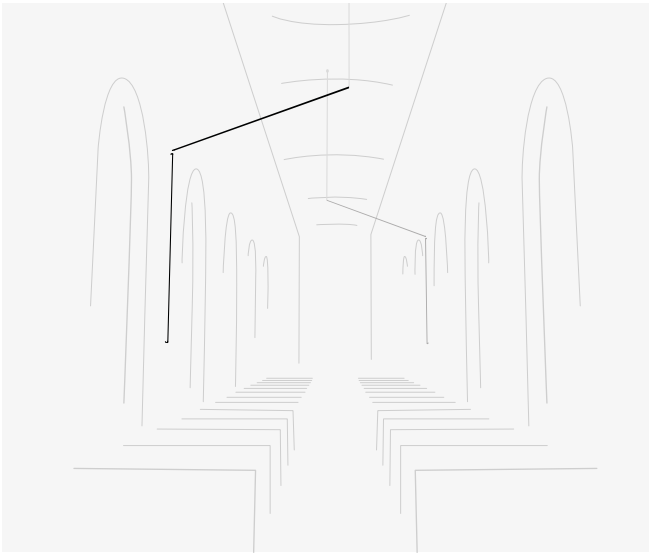


STI141
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are on the Floor

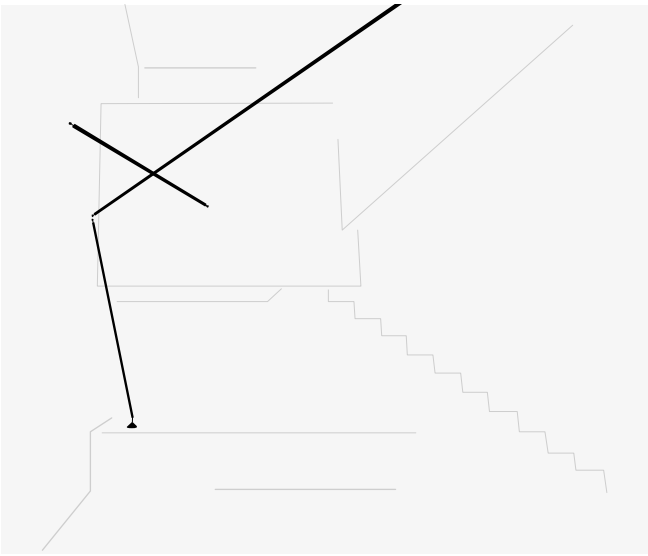

STI151
Sketch composed by two compositions.

Composition 1:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 2700 K. 3260 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.


Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

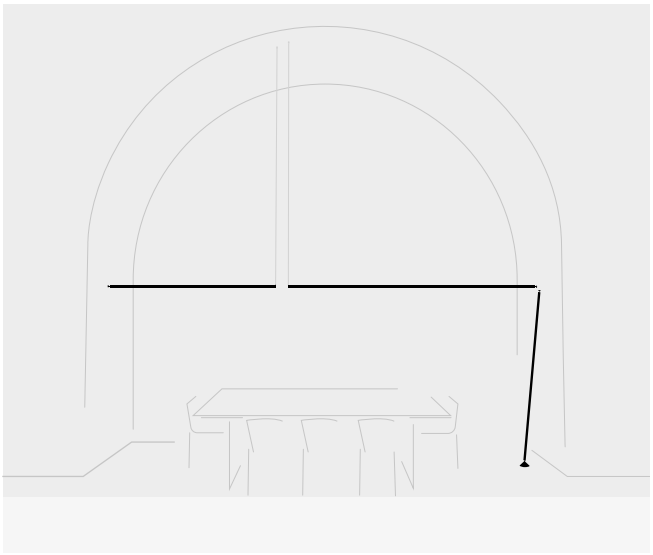

STI161
Sketch composed by two compositions.

Composition 1:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4336 lm. 35,2 W.
Remote driver Built-in Micro. 1-10V.


Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

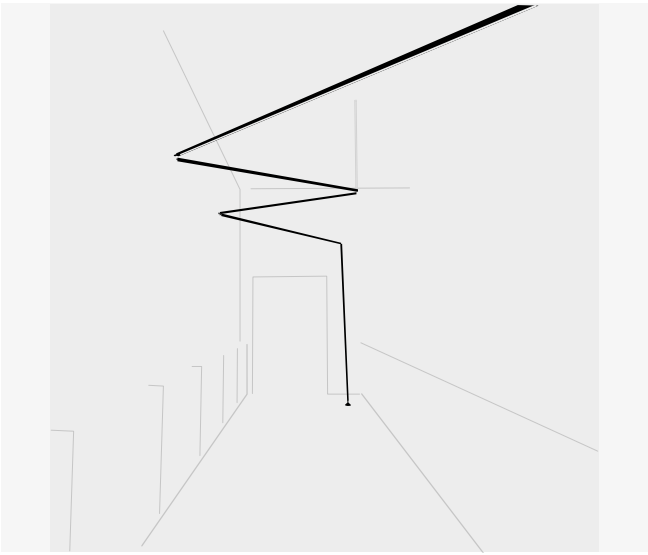

STI171
Sketch composed by two compositions.

Composition 1:
3 Sticks: 3 x 200 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Surface canopy. 1-10V.


Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Surface canopy. 1-10V.

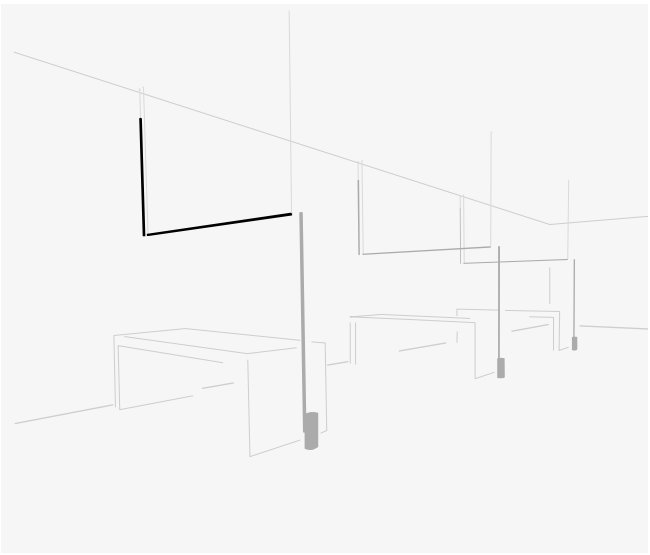

STI175
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.
LED 3500 K. 8309 lm. 61,6 W.
Surface canopy. 1-10V.

Some sticks are attached to the Wall

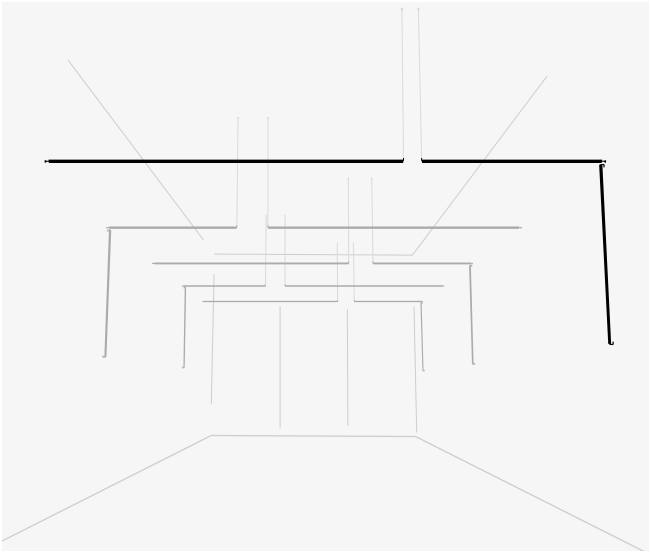

STI145
Sketch composed by five identical compositions.

Each composition:
3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V

Each project is unique.
Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalize your own Sticks composition quick and easy at vibia.com.

Sticks Connectable

Elements to be configurated

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Pendant
Pendant-Pendant
Pendant-Ceiling
Pendant

Sticks 1,5 m.
7300 7310 7311 7320 7321 7330 7350

Temperature Colour

/1 _ 2700 K E
CRI >90 3260 lm 123 lm/W
/2 _ 3000 K E
CRI >90 3510 lm 133 lm/W
/3 _ 3500 K E
CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

Sticks 2 m.
7303 7313 7314 7323 7324 7333 7353

Temperature Colour

/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 4680 lm 133 lm/W
/3 _ 3500 K E
CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

Sticks 3 m.
7306 7316 7317 7326 7327 7336 7356

Temperature Colour

/1 _ 2700 K E
CRI >90 6519 lm 123 lm/W
/2 _ 3000 K E
CRI >90 7020 lm 133 lm/W
/3 _ 3500 K E
CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Driver and **Dimming** depends on selected installation accesory (see page 475).

Suspension cables up to 3m. for Wall - Pendant and Pendant-Pendant.

Personalisation options available
- Extra cable length for Wall - Pendant and Pendant - Pendant.
Min. quantity, upcharge and extra lead time apply.

11 Black
(NCS S 8500-N)

LED IP20 Dimmer



Horizontal pendant version with a UGR index <19 available.

Floor-Wall

Sticks 1,5 m.
7340

Temperature Colour

/1 _ 2700 K F
CRI >90 3260 lm 123 lm/W
/2 _ 3000 K F
CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K E
CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

Sticks 2 m.
7343

Temperature Colour

/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K E
CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

Sticks 3 m.
7346

Temperature Colour

/1 _ 2700 K F
CRI >90 6519 lm 123 lm/W
/2 _ 3000 K F
CRI >90 5288 lm 100,15 lm/W
/3 _ 3500 K E
CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Driver and **Dimming** depends on selected installation accesory (see page 475).

11 Black
(NCS S 8500-N)

LED IP20 Dimmer

Electrical connection options



Floor base & plug




Surface canopy



Built-in disc S



Remote driver Built-in Micro



Floor base & plug
ACST000001 ACST000002


Driver Constant Voltage 24V.
200~240V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.

Packaging
1 Box.
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.

11 Black
(NCS S 8500-N)

IP20 Dimmer



Surface canopy
ACST000003 ACST000004

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.


Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box.
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.

11 Black
(NCS S 8500-N)

IP20 Multi-volt



Built-in disc S
ACST000005 ACST000006

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.


Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 Multi-volt



Remote driver Built-in Micro
ACST000007 ACST000008

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Aluminum.

Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 Multi-volt

Sticks Solo

Design by Arik Levy

A pure solution for a minimalist interior, Sticks Solo features a range of free-standing, arranged floor to wall, connecting two planes of the same space or horizontal pendant of various lengths and incorporates a range of electrical connection options for seamless integration with the surrounding architecture.

Floor




7338




7339



7348

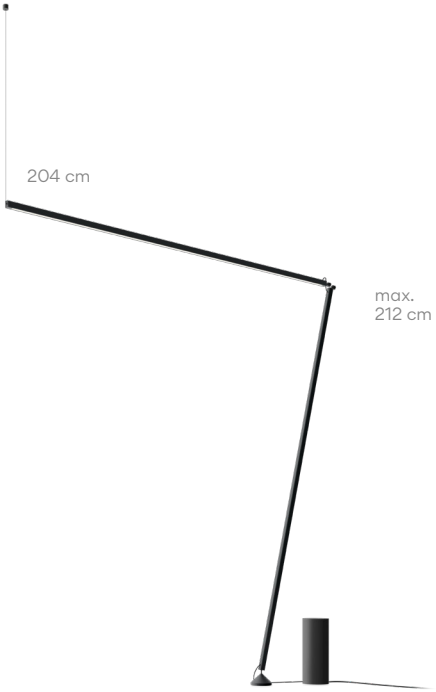


7375
7376 UGR <19

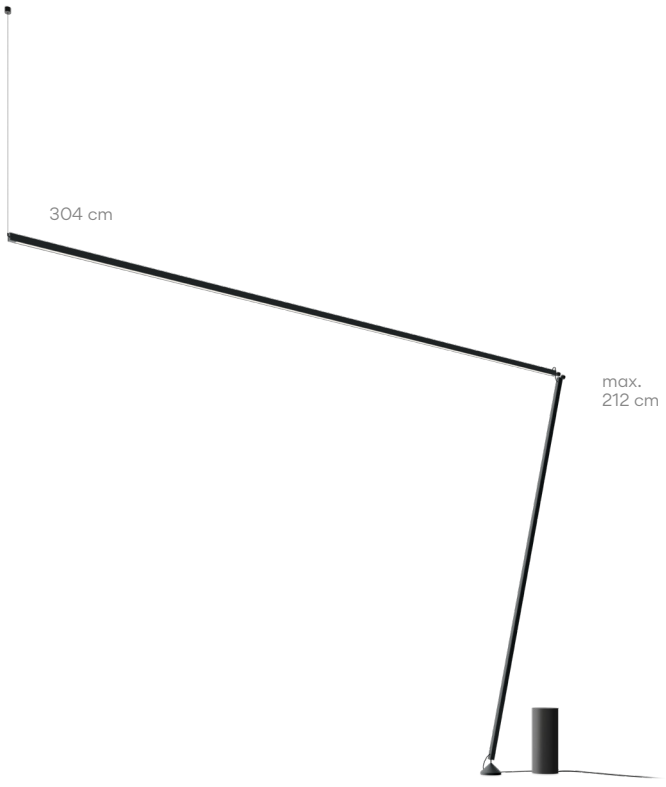

7378
7379 UGR <19

7338

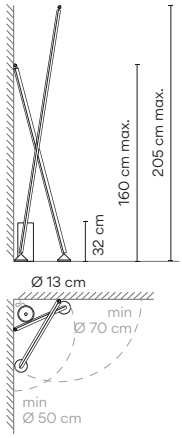

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 7604 lm
/2 _ 3000 K - 8192 lm
/3 _ 3500 K - 8286 lm
F
CRI >90

Control
7338 11 / _ **5** Push


Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 26,4 W 24V
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0414 m³
Gross weight 14,2 Kg Net weight 9,7 Kg

LED IP20 Dimmer

7339

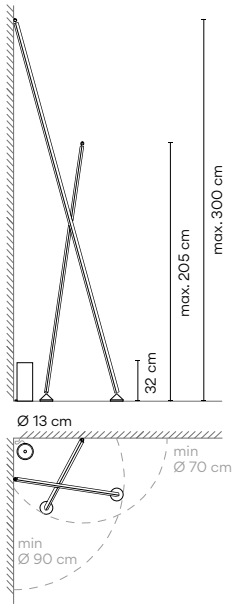

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm
F
CRI >90

Control
7339 11 / _ **5** Push


Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
1 x LED STRIP 52,8 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,057 m³
Gross weight 16,6 Kg Net weight 10,6 Kg

LED IP20 Dimmer

7348



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4346 lm
/2 _ 3000 K - 4681 lm
/3 _ 3500 K - 4734 lm
F
CRI >90

Control
7348 11 / _ **5** Push


Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0166 m³
Gross weight 8,8 Kg Net weight 8,4 Kg

LED IP20 Dimmer

7375
7376
UGR <19

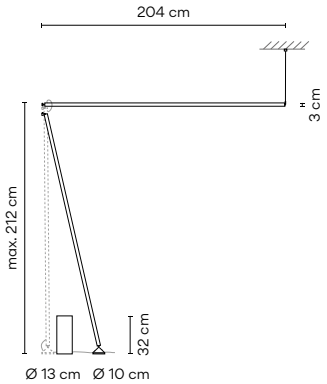

7375

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7375 11 / _ **5** Push

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg

LED IP20 Dimmer

7376

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7376 11 / _ **5** Push


Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg

LED IP20 Dimmer

7378
7379
UGR <19

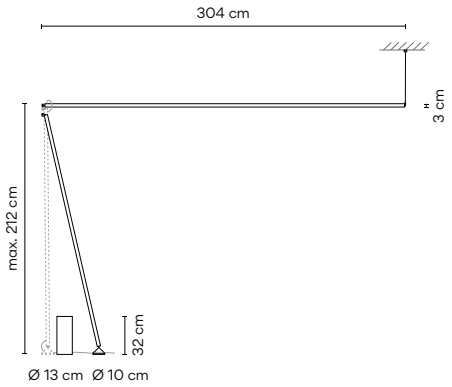

7378

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm
F
CRI >90

Control
7378 11 / _ **5** Push

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2W 24V
1 x LED STRIP 52,8W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 3,25
Vol 0,05 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 Dimmer

7379

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm
F
CRI >90

Control
7379 11 / _ **5** Push


Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2W 24V
1 x LED STRIP 52,8W 24V
Constant voltage 24V
200~240Vac 50/60Hz


Packaging
1 Tube 0,12 x 0,12 x 3,25
Vol 0,05 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 Dimmer


Pendant




7360
7361 UGR <19
152 x 2 x 3 cm

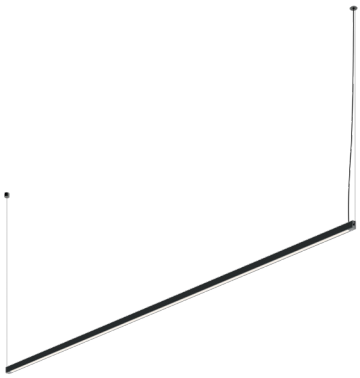

7363
7364 UGR <19
201 x 2 x 3 cm

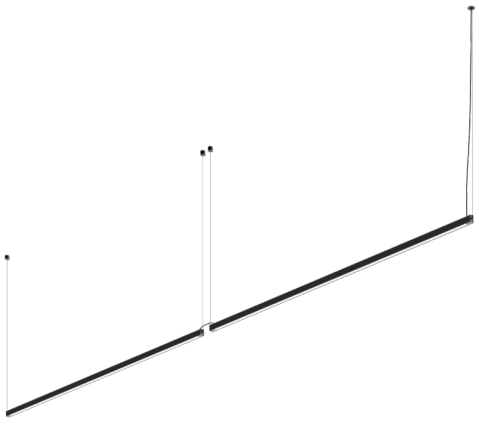


7365
7366 UGR <19
304 x 2 x 3 cm

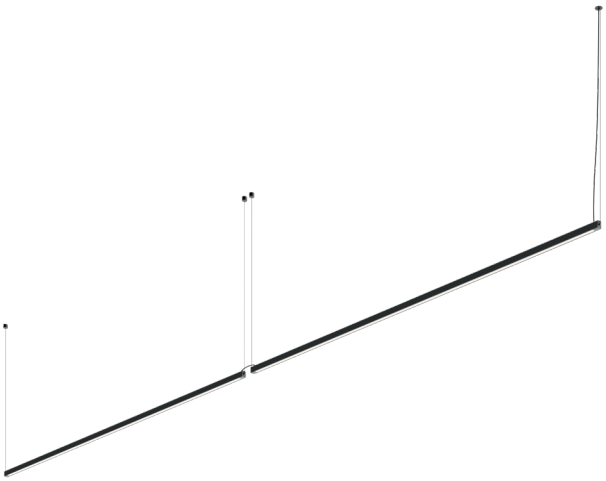

7368
7369 UGR <19
402 x 2 x 3 cm

7360
7361
UGR <19

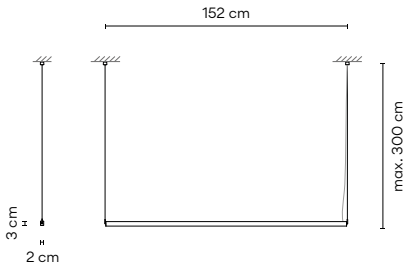

7360

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3260 lm
/2 _ 3000 K - 3511 lm
/3 _ 3500 K - 3551 lm
F
CRI >90

Control
7360 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 1,60 m
Vol 0,007 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 4,6 Kg Net weight 3,4 Kg

LED IP20 Dimmer Multi-volt

7361

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3260 lm
/2 _ 3000 K - 3511 lm
/3 _ 3500 K - 3551 lm
F
CRI >90

Control
7361 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS


Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 1,60 m
Vol 0,007 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 4,6 Kg Net weight 3,4 Kg

LED IP20 Dimmer Multi-volt

7363
7364
UGR <19

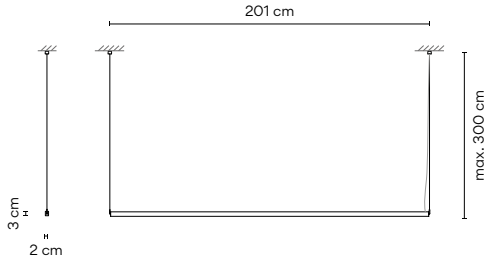

7363

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4347 lm
/2 _ 3000 K - 4682 lm
/3 _ 3500 K - 4734 lm
F
CRI >90

Control
7363 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

LED IP20 Dimmer Multi-volt

7364

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4347 lm
/2 _ 3000 K - 4682 lm
/3 _ 3500 K - 4734 lm
F
CRI >90

Control
7364 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.


Light Source and electronics
1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

LED IP20 Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

7365
7366
UGR <19

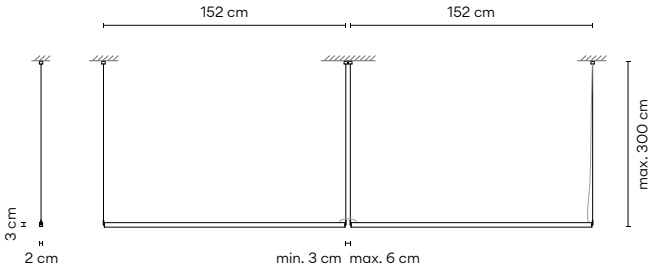

7365

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 6521 lm
/2 _ 3000 K - 7022 lm
/3 _ 3500 K - 7102 lm
F
CRI >90

Control
7365 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,070 m
Vol 0,032 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 7,9 Kg Net weight 4,3 Kg

LED IP20 Dimmer Multi-volt

7366

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 6521 lm
/2 _ 3000 K - 7022 lm
/3 _ 3500 K - 7102 lm
F
CRI >90

Control
7366 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.


Light Source and electronics
2 x LED STRIP 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,070 m
Vol 0,032 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 7,9 Kg Net weight 4,3 Kg

LED IP20 Dimmer Multi-volt

1160 10 /1A _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

7368
7369
UGR <19

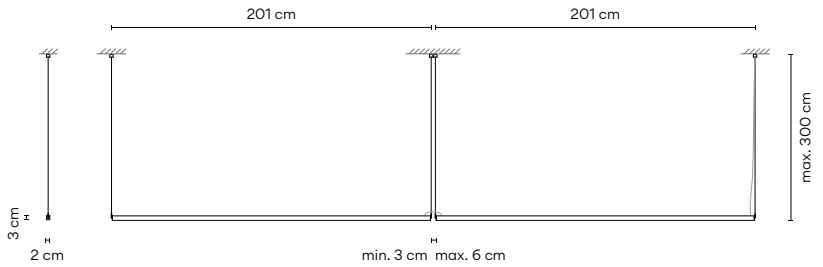

7368

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7368 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25 m
Vol 0,035 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 8,7 Kg Net weight 4,9 Kg

LED IP20 Dimmer Multi-volt

7369

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7369 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25 m
Vol 0,035 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 8,7 Kg Net weight 4,9 Kg

LED IP20 Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

Select Eletrical connection

For Ref. 7360, 7361, 7363, 7364, 7365, 7366, 7368, 7369

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Black finish.

_24
Built-in Disc S



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface




28 x 10 x 4 cm


Ref. 3768, 3769
40 x 10 x 4 cm

Black finish.

Remote



Built-in






Musa

Design by Note Design Studio

Delicate elegance.
It explores the delicacy of nature
which is both strong and powerful,
in a poetic expression of light.

Table Wall




7400
9 x Ø 26 cm



7402
Ø 26 x 14 x 10 cm




7404
Ø 26 x 14 x 10 cm



7415
Ø 26 x 10 cm

Portable

7400



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm
F

CRI >90

Control

7400 _ _ **/ 15** Push
(with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
Push-button on the base.


LED IP20 Dimmer Bi-volt





Product specifications subject to change without notice. Please check vibia.com for updated information.

7402



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm

F

CRI >90

Control

7402 _ _ **/ 15** Push (with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
Push-button on the base.

LED IP20 Dimmer Bi-volt

7404



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 157 lm

G

CRI >90

Control

7404 _ _ **/ 15** Push (with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 1,5 W 500 mA
Constant Voltage 5V
100~240V 50/60Hz

Packaging


1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,4 Kg Net weight 0,95 Kg

Notes

Portable version with batery.
Dimmer switch on the base. 3 step dimming.
Electric cable with plug. 3 m.
Push-button on the base.
Battery life: from 6 to 18 hours (depending on intensity).

LED IP20 Bi-volt Li-ion

7415



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm

F

CRI >90

Control

7415 _ _ **/ 13** 1-10V

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,8 Kg Net weight 1,3 Kg

LED IP20

Knit

Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.


Pendant

7450




Ø 45 cm

7455

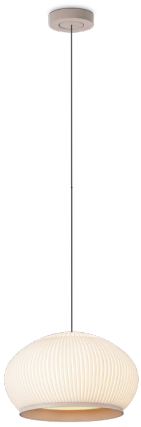

Ø 45 cm

7460



Ø 45 cm

7470




Ø 65 cm

7475



Ø 65 cm

7450



Finishes

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 4740 lm
E
CRI >90

Control

7450 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging
1 Box 0,55 x 0,55 x 0,65 m
Vol 0,196 m³
Gross weight 6 Kg Net weight 3,7 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

7455



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7455 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,9 Kg Net weight 3,2 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

7460



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7460 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz


Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,2 Kg Net weight 3,4 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

1160 | 10 | /1 | A | _18 | __
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

7470



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7470 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.


Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110~240V 50/60Hz

Packaging
1 Box 0,59 x 0,78 x 0,78m
Vol 0,358 m³
Gross weight 9 Kg Net weight 5,5 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

7475



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7475 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110~240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,77m
Vol 0,492 m3
Gross weight 9,5 Kg Net weight 6 Kg

Notes
Extra cable length.

LED | IP20 | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 7450, 7455, 7460, 7470, 7475

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16 cm

match with fixture finish.

_18
Free Wire




Ø 22 cm

Ø 36 cm


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in







Floor



7480
Ø 45 x 178 cm



7485
Ø 45 x 170 cm



7487
Ø 65 x 195 cm



7490
Ø 45 x 55 cm




7492
Ø 65 x 51 cm



7494
Ø 65 x 62 cm

7480



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7480 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38 x 0,36 m
Total Vol. 0,4311 m^3
Gross weight 21,9 Kg Net weight 11,3 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Electric cable 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt

7485



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7485 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38x 0,36 m
Total Vol. 0,353 m^3
Gross weight 21,5 Kg Net weight 10,8 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Electric cable 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt

7487



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7487 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,78 x 0,78 x 0,59 m
Box 2: 1,93 x 0,45 x 0,46 m
Total Vol. 0,7649 m^3
Gross weight 30 Kg Net weight 18,5 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
*Available from January 2025.
Electric cable 2,5 m

LED □ IP20 CE UK CA EAC Bi-volt


7490

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7490 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi



Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,65 x 0,55 x 0,55 m
Vol 0,196 m³
Gross Weight 5,4 Kg Net Weight 3,3 Kg

Notes
Push on the top of the luminaire.
Electric cable 2,5 m

LED □ IP20 CE UK CA EAC Bi-volt


7492

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7492 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi



Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,78 x 0,78 x 0,59 m
Vol 0,358 m³
Gross Weight 7,3 Kg Net Weight 4,5 Kg

Notes
Push on the top of the luminaire.
Electric cable 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt


7494

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7494 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi



Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,75 m
Vol 0,48 m³
Gross Weight 9,3 Kg Net Weight 5,9 Kg

Notes
Push on the top of the luminaire.
Electric cable 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt



Set

Design by Xuclà

Set is a new concept of modular wall sconces thatcomposes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising play of lights, shadows and volumes.

Wall



7749
18 x 10 cm


7750
18 x 10 cm

7751
30 x 10 cm

7752
30 x 10 cm

7753
38 x 10 cm

7749



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control
7749 _ _ **/** _ **2** 0-10V


Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,52 Kg

LED IP20 Bi-volt

7750



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control
7750 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 0,95 Kg Net weight 0,8 Kg

Notes
LED placed on the lower element.

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

7751



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm D
- **/3** _ 3500 K - 1374,9 lm G

CRI >90

Control
7751 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,25 Kg Net weight 1,1 Kg

Notes
LED placed on the lower element.

LED IP20 Bi-volt

7752



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm D
- **/3** _ 3500 K - 1374,9 lm G

CRI >90

Control
7752 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,6 Kg Net weight 1,4 Kg

Notes
LED placed on the lower element.

LED IP20 Bi-volt

7753



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm D
- **/3** _ 3500 K - 1374,9 lm G

CRI >90

Control
7753 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0193 x 0,36 m
Vol 0,0100 m³
Gross weight 2 Kg Net weight 1,5 Kg

Notes
LED placed on the lower element.

LED IP20 Bi-volt

Alpha

Design by Ramos & Bassols

A wall lamp with basic lines and advanced lighting performance, its diffuser emits a warm, comfortable light.

Wall



7940

12 x 12 cm




Without switch

7942

12 x 12 cm

7940



Finishes

18/ _ _ Graphite & Black (RAL 7016 & RAL 9005)

93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
D

/3 _ 3500 K - 163,20 lm
G

CRI >90

Control

7940 _ _ **/** _ **0** On/ Off

Materials

Diffuser: PC- Polycarbonate.
Lid: Zinc Alloy.
Body: Aluminum.
Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m^3
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface


On/ Off switch on the front cover

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



7942



Finishes

18/ _ _ Graphite & Black
(RAL 7016 & RAL 9005)

93/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
D

/3 _ 3500 K - 163,20 lm
G

CRI >90

Control

7942 _ _ **/** _ **0** On/ Off

Materials

Diffuser: PC- Polycarbonate.
Lid: Zinc Alloy.
Body: Aluminum.
Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m^3
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface
Without switch

LED IP20 Bi-volt

Match


Design by Jordi Vilardell & Meritxell Vidal


Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Characterised by unlimited configurations, Match's kinetic clusters exude a textured, sculptural presence.









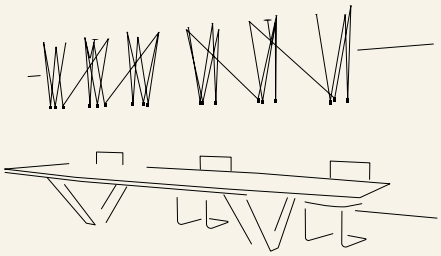

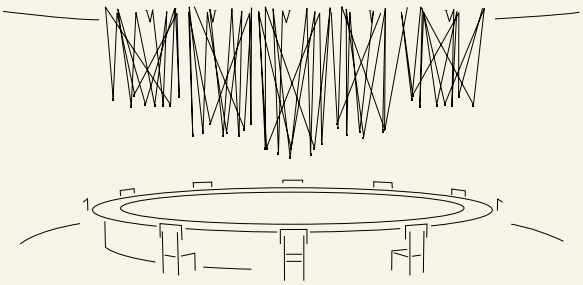

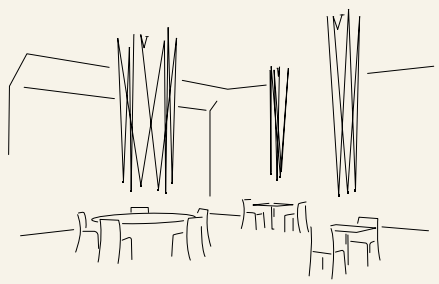









Built-in installation
-Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.
-Nodes:the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.


Personalise your own Match composition quick and easy at vibia.com

It's necessary to make your personalized configuration on vibia.com to see prices and place orders.


Example 1:




Example 2:




Example 3:




Example 4:



Example 5:



Example 6:



Finishes

03/ _ _ White
(RAL 9010)
18/ _ _ Graphite
(RAL 7016)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
G
CRI >90

/2 _ 3000 K - 1269 lm
D
CRI >80

/3 _ 3500 K - 1446 lm
G
CRI >90

Control

_ _ **/ A** Push; 1-10V- DALI-2
_ _ **/ Z** Casambi

Materials

Head: Aluminum.
Canopy: Steel.
Rods: Steel.

Light Source and electronics

LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Notes

Built-in

LED IP20 Bi-volt

Ø 4,5 cm Ø 10,5 cm

PLACE ORDER ONLINE AT WWW.VIBIA.COM



Light source

Luminaire data

The information published in this technical catalog (lumens & watts) refers to the light source. Check luminaire data in the downloadable spec sheet at **vibia.com**

LED retrofit		
900018. LED G9 4,2W 2700K 470 lm.		Puck and Warm
900102. LED E27 230V 12W LED 2700 K 1520 lm		Balance and Warm

Glossary

CE
Product fulfills the requirements
of the relevant European directives.

UK CA
Product fulfills the requirements
of Great Britain relevant legislation.

EAC
Product complying with TP TC 004/2011
and TP TC 020/2011. Custom Union Regulation

Product that complies with the law N24-09
of the current Moroccan legislation.

IP

Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids.
The scale goes from IP20 to IP69.

IP20
Product protected against solid object as big as or bigger than 12 mm. No protection against water.

IP20
IP40
Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

IP64
Dust-tight product. Protected against water spray.

IP65
Dust-tight product. Protected against water trickles.

IP66
Dust-tight product. Protected against water spurts.

Insulation class

Class I. Product with an additional protection cable (grounds).

Class II. Product protected against electric shock having a double insulation. No grounds.

Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Bi-volt
Valid for the range 110V-230V, 50-60Hz.

Multi-volt
Valid for the range 110-277V, 50-60Hz.

Cut out

Property for embedding dimension.

Integrated Dimmer

Dimmer
Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy
A
B
C
D
E
F
G
Less Efficacy

Light source information

CRI
Colour rendering index.


K
LED Colour Temperature.

lm
Lumen, unit of measurement of luminous flux.


lm/W
Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

Lighting control systems


1 Push control

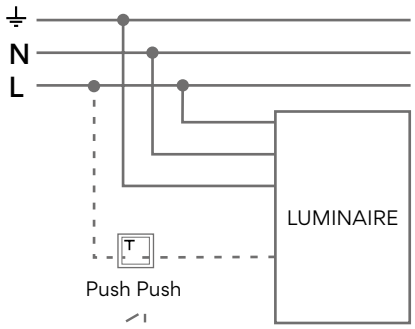


2 1-10V System control

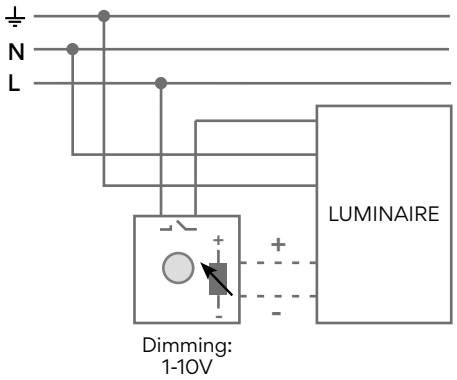


3 DALI System control

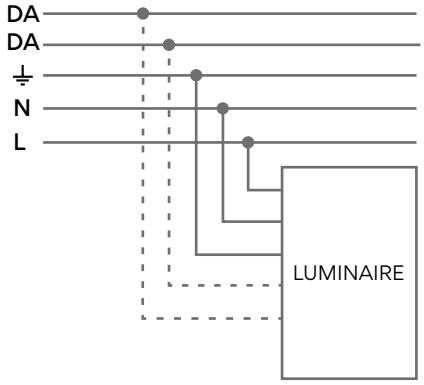


4 Casambi control

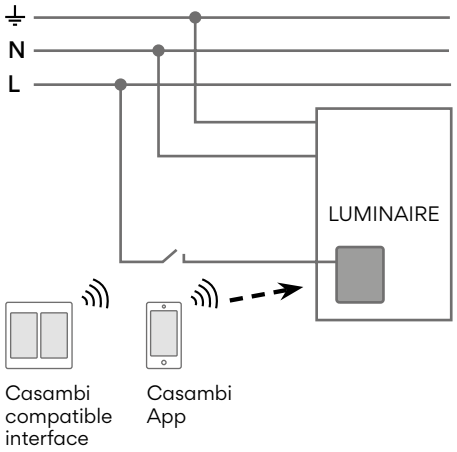

5 ProtoPixel control

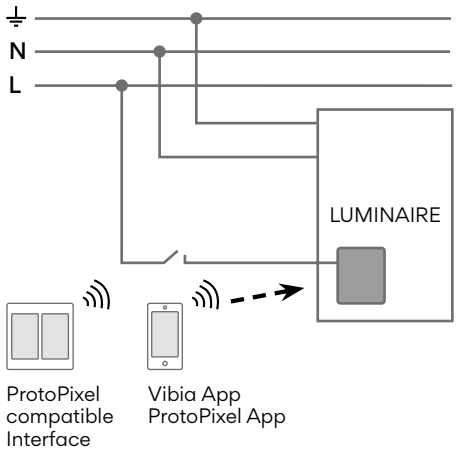

6 TRIAC control

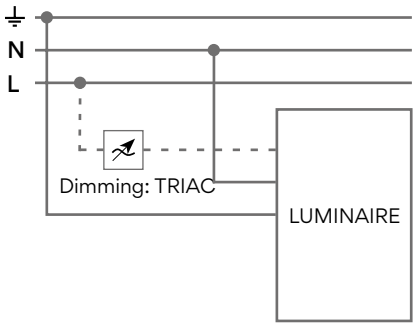

⏚	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal

Very important
Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

Vibia Lighting, S.L.U.

Office
Progrés 4-6.
08850 Gavà (Barcelona).
International Tel +34 934 796 971.

customer.service@vibia.com
vibia.com

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.

vibia.com